UC-NRLF
$B 305 254

Division of Vocational Ed

Digitized by Google

Digitized by Google

Digitized by Google

THE WILEY TECHNICAL SERIES

FOR

VOCATIONAL AND INDUSTRIAL SCHOOLS

EDITED BY

JOSEPH M. JAMESON

GIRARD COLLEGE

Digitized by Google

Digitized by Google

PRINTING

FOR SCHOOL AND SHOP

A TEXTBOOK FOR PRINTERS' APPRENTICES, CONTINUATION CLASSES, AND FOR GENERAL USE IN SCHOOLS

BY

FRANK S. HENRY

CENTRAL HIGH SCHOOL, PHILADELPHIA, PA.
FORMERLY INSTRUCTOR IN PRINTING, PHILADELPHIA TRADES SCHOOL

FIRST EDITION, CORRECTED
TOTAL ISSUE, TWENTY-THREE THOUSAND

NEW YORK
JOHN WILEY & SONS, INC.
LONDON: CHAPMAN & HALL, LIMITED

Digitized by Google

• • . ' •

\^t<i'^

fl^^ /

Copyright, 1917

BY

FRANK S. HENRY

^^tM(^i^ f/ I ^.y,;,/:;,.,(i£ur^4.Ci

J

1-24

Digitized by VjOOQiC

PREFACE

According to the Census of 1910, printing ranked sixth among the important industries of the United States, with an invested capital of $588,000,000, and offering employment to over 258,000 persons. Since that time it has been steadily advancing. The printing business today is replete with labor- and time-saving devices, and is being conducted on the basis of both expediency and efficiency. All well-equipped and property conducted printing establishments have installed

cost systems, and, by the use of time-stamping devices, are keeping accurate account of the time that employees spend on their jobs.

While, in many respects, these changes have been of advantage to the employer, they have been to the detriment of the apprentice. Formerly it was the custom to put an apprentice in the care of some competent workman. In the course of four years the journeyman was supposed to impart to the apprentice a full, working knowledge of the trade. Today the journeyman is practically working against time; he cannot train an apprentice and still make a creditable showing, consequently the average apprentice is simply drifting along, picking up what knowledge he can. If he is apt, he may learn to perform certain operations of the trade by imitation, usually without knowing why. This lamentable condition does not exist in every office, it is true, but it is prevalent enough to demand attention. Employers are beginning to realize that in striving for efficiency in production they have been neglecting a still more vital factor —^that of training efficient help,

With the idea of formulating some definite plan for the training of apprentices, the United Tj^thetae of America in 1911 appointed an apprenticeship conmiittee to investigate the matter. This resulted in the establishment of a permanent committee. It was realized that if apprentices were to be \mi-formly trained a series of textbooks was necessary. The committee has in preparation sixty-four books, fully covering

every phase of printing. This will imdoubtedly be a valuable library of technology. The price of the complete series, however, will debar it from everyday use in the schoolroom.

When the author first undertook the teaching of printing at the Philadelphia Trades School, he was handicapped by the lack of a textbook. There were many excellent books on the subject of printing, but none, so far as he knew, compiled especially for school use. At the present time the local xmions throughout the jurisdiction of the International Typographical Union are collaborating with the various local typothetae, and endeavoring to establish continuation schools for printers' apprentices in all the large centers throughout the United States. This means, naturally, an increasing demand for a practicable medium of instruction in the trade, and relying upon an experience of twenty-five years of actual practice in the shop, in every position from apprentice to superintendent, coupled with five years of teaching, the author has attempted to supply this need.

In the preparation of the manuscript, the author has kept in mind the fact that he is addressing the boy who knows nothing of the subject. The aim has been to explain fully, yet succinctly, the fundamental principles underlying the various processes. To the initiated the attention given to details at times may seem imnecessary. In the more advanced processes, however, it is hoped that even the practical man may find helpful suggestions.

It is manifestly impossible in a book of this size to cover every point and phase of printing. An attempt has been made, therefore, to present clearly and simply only those essentials

Digitized by VjOOQ IC

of the subject on which both teacher and student may build, and in this way to keep the book brief enough to meet the requirements of a practicable text and of a size conveniently to be carried in the pocket.

It has been an inspiration to the author in his work as a teacher to look back to his apprenticeship days, when he was singularly fortimate in being trained by a skilled workman, and he takes this opportxmity of expressing his gratitude to Mr. James H. Sterrett for guidance during that formative period. Acknowledgment is also due to Mr. T. Grow Taylor for kind advice and helpful siiggestion when the author took up the study of proofreading, and also for his kindness in critically reading the manuscript of the chapter on Proofreading.

The author acknowledges his indebtedness to Mr. Frederic W. Goudy and Mr. Frank J. Milon for revision of some of the text and to the following firms for the loan of cuts and other material used in illustrating the book: American Type Foimders Co., Bullock Manufacturing Assoc., Challenge Machinery Co., Chandler & Price Co., Golding Manufacturing Co., Hamilton Manufacturing Co., Horace

Hacker & Co., H. A. Hempel, Keystone Type Foimdry, Lanston Monotype Machine Co., Mergenthaler Linotype Co., Miller Saw-Trimmer Co., Morgan & Wilcox Mfg. Co., H. B. Rouse & Co., Star Tool Manufacturing Co., Wm. H. Sylvester & Son, John Thomson Press Co., Vandercook Press, and Wickersham Quoin Co.

Frank S. Henry.

PmiADELFHIA,

April, 1917.

Digitized by VjOOQiC

Digitized by VjOOQiC

CONTENTS

PACK

Preface iii

Introduction xi

CHAPTER I

Composition — ^Type, Spaces, and Leads i

Lay of the case.—The b, d, q, and p.—Kemed letters.—The

point system.—The new and the old system.—Table I.—The em of the body.—The pica em,—Sizes of spaces.—Thickness of spaces.— Table II.—The three-point space of eight-point.—Point-thick spaces.—^Point-line.—Point-set.—^Legibility.—Leading.—^Linot}^ slugs as spacing material.

CHAPTER II

Composition — Setting Plain Matter 13

Making up a stick.—The composing-rule.—Setting type, —Justifying a line.—Uniform spacing.—Rules for spacing.—^Emptying the stick.—How to use the galley.—Tying up a job.

CHAPTER III

Taking a Proof, Correcting the Job, and Returning Type to Case 23

Placing a job on the stone.—Pulling a proof.—Proofs in colors.— Galley-press.—Press-proofs.—The Washington Hand-press.—The Poco Proof-press.—The Potter Proof-press.—The Vandercook Proof-press.—Correcting the job.—Pulling a revise.—Saving cord for future use.—^Making up pages.—Cleaning type.—Cleaning rules. —Distributing t3rpe.—Putting away leads and furniture.

CHAPTER IV Type Calculations 36

How much will it make ?—^What size type shall I use ?—
Determining the number of ems in composed matter.—
Determining the value of composed type.—Table III.—
Determining weight of type by measurement,—Determining
the amoimt of leads to a page.

Digitized by VjOOQiC

CHAPTER V

PAGB PROOFREADING. 44

Requirements for proofreading.—Proofreaders* marks.—
^Table rV.—Order of procedure in proofreading.—
^Punctuation.—Marks of punctuation.—^Use of the conmia.
—The dash.—The semicolon. —^The colon.—The period.
—^The hyphen.—^The apostrc^he.— Quotation marks.—
^The interrogation mark.—^The exclamation mark.—
^Parentheses.—^Brackets.—Division of words.—
Compound words.—Capitalization.—Printing-office style.

CHAPTER VI Type Faces 73

General classification. — Text. — Gothic. — Roman. —
Italic.— Script.—Old-style.—Modem.—The serif.—Old-

style and modem serifs.—Other groups.—Cheltenham Oldstyle.—Clearface.—^Type families.—" Pi" as an aid to type study.—Comparison of serifs.— Swash letters.

CHAPTER VII Job Composition S4

General survey of the field.—The layout man.—Fundamental principles.—Optical center.—Balance.—^Harmony.—^Tone.—Contrast.—Appropriateness.— Grouping. — Mass grouping.— Panel grouping.—Proportion.—^Table of proportions.—^Table V.—^Standardizing proportions.—^Borders and ornaments.—^Initials.—Shape harmony.—Selecting the salient features of a job.—Improving a job.—Spacing job type.—^Letter-spacing.—The square effect.—Selection of mle for a job.—^Aligning rule with type.—Side-face or chamfered rule.—Mitered comers.—To obtain perfect joints in tables.—Skeletonizing.—Setting a register job.—^Allowing for squeeze.—Concluding hints.

CHAPTER Vra

Setting a Job 116

The order-blank.—^Analysis of copy.—Size type to be used.— Position on the sheet.—^Layouts.—^Specimens.

Digitized by VjOOQiC

CHAPTER IX

PAGB

Setting Tables and Other Intricate Matter 141

Ability required.—^Jobs containing rules.—The Typotabular System.—^Hand-set ruled blanks.—^Wax-engraving.—^Monotype method of setting rule work.—Casting off a table.—Three-point spaces of eight-point.—^Point-thick spaces.—^Line-up of figures.— Setting more than one column in a single measure.—Blank-book headings.—Setting and registering type to horizontal lines.— Running type around cuts.—Setting type in circles.—^Algebra, genealogies, and pedigrees.

CHAPTER X Locking Up Forms 163

General principles.—Quoins.—^Locking up a form.—^Bearers.— Gudgeons.—^Locking up register jobs.—^Locking-quoins.—^Jobs with rules.—^Allowance for squeeze.—Troublesome comers.— Squaring the form.—^Wooden furniture.—Riding of forms.

CHAPTER XI

Imposition 176

Placing pages on the imposing-stone.—^Hand- and machine-folding.—Margins.—Determining margins.—Determining the lay of a form.—Various parts of a form.—Imposing the form.—^Pages out of center.—^Making up to the paper.—

^Lay of forms: the four; the eight; the twelve; the sixteen; the twenty; the twenty-four.— Folders.—^Machine-fold.— Signatures.—^Insetting.—Press-points.— Other forms.— ^Proper lay of lengthwise forms.—^Folding heavy paper.— Chases.

CHAPTER XII

Cutting-tools por Printers 197

Miller Saw-Trimmer.—^The lead-cutter.—Mitering-machines.— The upright machine.—Trinmiing material.— The burr on rule.— Trimming to gauge.—Cutting to multiples of a point.—Cutting very small pieces of rule.— Type " fitting " on a mitering-ma-chinc—^Type-high machines.—Care of madiines.

Digitized by VjOOQiC

CONTENTS

CHAPTER Xm

PAGE

Composing-machines 209

Economy of machine composition.—^The Linotype.—The Monotype.—^Mounting illustrations in machine-set composition.—^Non-distribution.—^The Intertype.—^Type-

casting machines.

CHAPTER XIV

Presswork 220

Platen presses.—The bed.—The platen.—The draw-sheet. —The grippeis.—Roller-bearers.—Rollers.—Oiling the press.—Shrinking of furniture.—Impression.—The tympan. —^Inserting the form.— Make-ready.—Overlaying.— Guides.—Feeding a press.—Drying the sheets.— Slipsheeting.—Envelopes.—Opening and closing envelopes. —Frisket.—Registering.—Slurring of rule jobs.— Embossing.—Perforating.—Scoring.—Cutting and slitting. —Printing, cutting, scoring, and perforating ?X one operation.—Printing a two-color register job by the aid of a frisket.—^Washing up.— Removing hard ink from rollers and press.—Safety devices.

CHAPTER XV Pmnting-ink 252

Composition.—Pigments.—The vehicle.—The drier.— Pressroom temperature and humidity.—^Adapting ink to stock.—How to remedy ink troubles.—Dopes.—Mixing ink. —^Mixing tints and shades.—Duotone inks.—Halftones.— Three-color process work.— Process inks.

CHAPTER XVI

Paper 262

Origin.—The fiber.—Pulp.—The beater.—The refining-engine. —^The paper-making machine.—Hand-made paper. —Book papers. —Flat papers.—Sizes of paper.—The ream. —^Weights of paper.— Relative weights.—The Lakeside System.—^Designating paper according to a substance number.—^Table VI.—Envelope sizes.— Table VH.— Figuring and cutting stock.

Glossary 281

Digitized by VjOOQiC

INTRODUCTION

A PRIZE was recently oflFered by "The Inland Printer" for the best answer to the question, "What is a Printer?" Anyone who has made a study of printing will realize how difficult it is to define the term. Printing, as a process of making impressions in or leaving marks upon a surface, is of great antiquity. There are still extant many clay tablets, waxed surfaces, scratched leaves, engraved wood-blocks, and other devices that serve as guideposts to mark the advance of printing from hmnble beginnings to the mmierous and complex methods of today.

The average layman has but little idea of the inmiensity of the field of printing and of its importance to modem civilization, including, as it properly does, not only the

printed word, and the illustrations that are the necessary adjuncts, but also the textile field—^the printing of cloth for garments, of floor coverings, wall-paper, tapestries, etc. The average typographic printer also has but a faint conception of the numerous ways in which his texts are illustrated.

In general, there are three fundamental principles involved in printing: from raised surfaces (letterpress), from plane surfaces (lithographic), and from simken or engraved surfaces (intaglio). Taking them in the inverse order, intaglio printing embraces steelplate, copperplate, and photogravure; lithographic printing covers all those processes based on the selective properties of a prepared surface for greasy ink and water, and includes lithography, zincography, and collotypy; letterpress is the printing done from raised surfaces, such as type, halftone plates, zinc-etchings, woodcuts, etc.

Digitized by VjOOQiC

Each of these methods has its own special sphere, but there are numerous points of contact. Letterpress is by far the most important; and the most important branch of letterpress is typography. This treatise is devoted to typographic printing, but, as stated in the preface, it makes no pretense of fully covering the subject. The student of typography is urged to acquire at least a smattering of the various other ways in which things are printed. He will certainly have a broader and better conception of his own branch of the work. He should also have a general knowledge of all the trades allied

to his own, such as typefounding, electrotyping, paper-making, etc. Teachers of printing should take their students on shop visits, and see that they get j5rst-hand information on these topics.

To the iminitiated, the setting of type seems the simplest of mechanical operations. Apparently, all that is necessary is for one to know the lay of the case; the operation of placing the type in the stick is assimied to be so simple that even a child should do it. If this were all there is to typesetting, there would be no need for schools of printing. The student soon learns, however, that he must possess considerable special knowledge and skill before he can be considered a good compositor.

The boy who makes the greatest strides in printing is he who has attained at least the eighth grade in public school, and has a fair knowledge of punctuation, capitalization, spelling, and the division of words. If he is to be a job compositor he Bhould have a precUlection toward art. He should posses9 mechanical ability. Above all, he should be studious, for he will find that if he is to advance in his chosen field he must be continually studying to keep pace with progress.

A boy who does not possess these requisites had better not undertake the work. There are entirely too many men of mediocre ability in the business now, much to the annoyance of employers. It is to be regretted that such men do not strive to improve their earning capacity by judicious study. There

is constant demand for men of ability.

Digitized by VjOOQiC

The student who takes up printing as his life's work is strongly lurged to make a study of every branch of the craft. He will find much valuable material in the various books on printing to be found in the public libraries. He is especially urged to consult the ciurent mmibers of the various magazines devoted to printing and make a special study of the reset specimens, and also fojlow the department in "The Inland Printer " devoted to apprentices. He should also gather together those pieces of printed matter that impress him as being either very good or very bad, and take up with his instructor the question why they appear good or bad. Much useful information may be acquired in this way.

The instructor should show samples of good and bad printing and tell why they are good or bad.

Layout work should be a strong feature of the course of instruction, as it offers the instructor endless opportunity to criticise, and point the right road. It also affords the student excellent practice.

As an aid to the study of tjrpe faces, the student should carefully read the specimen-books issued by the various typefounders. He should also take up hand-lettering, and make a study of historic ornament.

Digitized by VjOOQiC

Digitized by VjOOQiC

PRINTING

CHAPTER I COMPOSITION—TYPE, SPACES, AND LEADS

1. Lay of the Case. —Owing to the general use of typesetting machines, very little plain or straight matter is now set by hand. For this reason the pair of cases, formerly very much in vogue, is now seldom used. Nearly all job tjrpe is kept in dust-proof cabinets (Fig. i), and the California job case is rapidly supplanting other forms. In Fig. 2 is shown the lay of the two styles of cases. The arrangement of the capitals and of the lower-case letters is the same for all styles of cases. A study of the figiure shows that the lower-case letters mos^ frequently used are grouped about the center of the case. The capitals run alphabetically, with the exception of the J and theU.

The quickest way for a student to familiarize himself with the lay of the case is to draw a diagram of it and locate on the diagram all letters in their proper places. A printed diagram carried in the pocket and studied at odd moments, is also a splendid aid. Setting the following sentence, which contains every one of the letters of the alphabet, will give practice ii;i

locating the boxes:

!

"The quick brown fox jumps over the lazy dog."

2. The b, d, q, and p.—^Inasmuch as type is cast in reverse, students have trouble at first in reading tjrpe and in distin-

Digitized by VjOOQiC

Old Style of Composing-frame.

New Style of Composing-cabinet.

Fig. I.

Digitized by VjOOQiC

TYPE, SPACES, AND LEADS

II la IB B H B B l IH a ta H JM ffl JB

9^^ *^ Mf »M Iti K3l

T^^^^A^A^\^^^^ W^ ^

Upper Case.

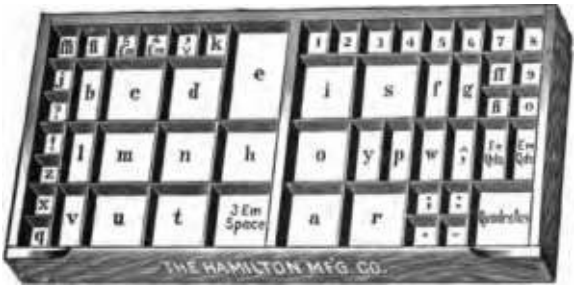

Lower Case. A Pair of Cases.

(jimM

fit G>S.S 3 &f

liitfiUHi

^v^tv^r«^\v:tGl^v\¥tl c^

California Job Case. Fig. 2.—Showing Lay of

Digitized by VjOOQiC

guishing certain lower-case letters. In reading type, the stick should not be turned upside down, but should be held just as in setting type. To distinguish between the b and d, and the p and q, observe that the roimd parts of the b and d face each other when held over their respective boxes, and that the round parts of the q and p face the opposite way, or toward

their respective boxes.

3. Eemed Letters. —When a letter is cast in such position that the face projects over the side of the body, it is said to be kerned. The lower-case f and j are both kerned. With some faces of type, if we were to place an i, 1, or f beside the f, the projecting part of the letter would very likely be broken off. To prevent this, such combinations of letters are cast on one body, and these are known to printers as logotypes. The correct name for them, however, is ligatures. We have the following combinations: fi, fl, ff, ffi, and ffl. Some roman letters are cast without kerns. Nearly all italic fonts have some kerned letters. The characters €t and it, found in some fonts, are ligatiures.

4. The Point System.^-Some time prior to the year 1450 Gutenberg invented the casting of metal type in molds. As the art of printing advanced, many new sizes were cast, but no attempt was made to cast them with a uniform gradation in size, and it was difficult to build up one size of body to equal another; that is, jw^/z/y them.

To obviate this, Foumier, in 1737, advocated a method of casting type according to some imit. The size known as pica was in use in various countries in Eiurope, and was considered a standard size. Taking the pica as a base he divided it into twelve equal parts, each of which he called a point. He chose one-twelfth of a pica as the imit because there existed five sizes of type between pica and nonpareil.

As nonpareil was just half the size of pica, this made the succession of sizes seven, eight, nine, ten, and eleven point, any one of which could be justified with another by the use of material made to the same unit.

Digitized by VjOOQiC

This plan of Fournier's was an excellent one, but it involved so much expense in the changing of type molds that type-foimders hesitated to adopt it. In the year 1878 the foimdry of Marder, Luse & Co., of Chicago, was destroyed by fire. When it was rebuilt the firm changed over to the point system. This was the beginning of the point system in America. The United States Typefounders' Association finally adopted it in 1887. It is the only system in use in first-class offices today.

While pica has always been considered a standard size, it has never been of a uniform size. It has varied in different countries, and even among typefounders in the same coimtry. Tests of pica sizes have demonstrated that they varied from 70^ to 75 picas to the English foot of twelve inches. The American pica runs about three points over 72 lines to the foot. Its actual measiurement is 0.16608 of an inch. One-twelfth of this, or one point, is, therefore, 0.01384 of an inch.

It is popularly supposed that six picas equal one inch. This is approximately so, but not absolutely, for six picas measure but .99648 of an inch.

Fig. 3 shows the increase in thickness, by points, from one to twelve,

I point « 0.01384 inch. i pica = 0.16608 inch.

Fig. 3.—Showing Increase in Thickness, by Points, from One to Twelve.

5. The New and the Old System. —^In Tabie I is given the name of each type size under the old system of nomenclature and the size nearest to it under the Point System. Nonpareil, brevier, and pica, and their multiples, are the only ones that remained the same size under the new system.

Digitized by VjOOQ iC

TABLE I.—TYPE SYSTEMS

Size. New System.

Name, Old System.

3 -point—Excelsior 3J-point—Brilliant*

4 -point—Semi-Brevier 4i-point—^Diamond

5 -point—Pearl 5}-point—^Agate

6 -point—Nonpareil

7 -point—Minion

8 -point—Brevier

9 -point—Bourgeois

10 -point—^Long Primer

11 -point—Small Pica

12 -point—Pica

14 -point—2-line Minion, or English

16 -point—2-line Brevier, or Columbian

H J System. Name. Old System. i8-point—^3-line Nonpareil, or

Great Primer 20-point—2-line Long Primer, or

Paragon 22-point—2-line Small Pica 34-point—2-line Pica 28-point—2-line English 30-point—s-line Nonpareil 36-point—3-line Pica, or Double

Great Primer 42-point—7-line Nonpareil 48-point—^4-line Pica, or Canon S4-point—9-line Nonpareil 60-point—s-line Pica 7 2-point—6-line Pica

6. The Em of the Body, —^When calculating the amount of type contained in any piece of composed matter, it is measured up in ems, and this em, or unit, is the em of the body. The square of each size of type is called the em of that body. Thus, the cm of six-point is six points square; the em of eight-point is eight points square; and so on. In Fig. 4 is shown the actual size of the em in the various points.

Siz-Pt. Seven-Pt. Eight-Pt. Nine-Pt. Tcn-Pt. Eleven-Pt. Twelve-Pt. Fig. 4.—^Actual Sizes of the Em.

7. The Pica Em. —^The size known as pica had been in use in various Eiuropean countries for many years prior to the inven-

* There seems to be a diversity of opinion regarding the point size of Brilliant. De Vinne gives it as 4-point. Brilliant actually measured about 3! points. When the MacKellar, - Smiths & Jordan Company adopted the Point S3rstem they cast Brilliant on a 3i-point body. Four-point they called Semi-Brevier.

Digitized by VjOOQiC

tion of the point system, and its size varied slightly in different countries. It has, however, always been considered the unit of length.

In order to facilitate the work in a composing-room, leads,

slugs, rules, and fumitiure are used in standard lengths. These lengths are designated in ems, and the em is the pica em. Thus, when a lead twenty-four ems long is spoken of, twenty-four pica ems is meant. If furniture is spoken of as four • by twenty, what is meant is that its width is equal to four pica ems, and its length is equal to twenty pica ems.

If a pica-gauge is not at hand when measuring material, we may approximate its size by measuring it in inches, and assuming that there are six picas to an inch.

It is very essential for the apprentice to remember that all accessory material in a printing-office is graduated in pica ems.

When material is either cast or cut to even multiples of pica it is called labor-saving, and should never be cut or altered in any manner.

8. Sizes of Spaces. —^The spacing material that usually accompanies a font of type consists of one-, two-, and three-em quads, an en quad, three-, foiu:-, and five-em spaces, and a hair-space. The em quad is the square of the body of the type: that is, it is just as wide as it is thick. The two- and three-em quads are respectively two and three times as wide as they are thick. An en quad is one-half of an em, a three-em space (frequently called a thick-space) is one-third of an em, a four-em space is one-fourth of an em, and a five-em space is one-fifth of an em in thickness. The hair-space varies in

the nimiber to an em. It is approximately one point thick for the smaller sizes of type and two points thick for the larger sizes. In ten-point it is one-ninth of an em. Fig. 5 shows the different sizes of quads and spaces of ten-point type.

■I ■ II III nil mil

3-em i-em En 3-ein 4-em s-em Hair-

Quad Quad Quads. Spaces Spaces Spaces spaces

Fig. 5.—Quads and Spaces Qf Ten-poiut Tjrp^,

Digitized by VjOOQiC

PRINTING

9. Thickness of Spaces. —^Table II shows the actual thickness of all the various spaces and combinations of spaces, in sizes from twelve-point to six-point. Beginning with a five-em space and running down a column, we find that certain combinations show a gradual increase in thickness. It is by combining spaces of different thicknesses that the space between words is increased or decreased. It is, therefore, important that the student memorize the first five combinations, as they are continually being used when justifying lines.

TABLE II.—THICKNESS OF SPACES

Digitized by VjOOQiC

10. The Three-point Space of Eight-pohit. By reference to Table II it will be seen that the en quad of eight-point is four points thick and the four-em space two points thick. Typefoimders are now casting an eight-point space that is three points thick. This size is midway between the en quad and the four-em space. It is extremely useful in tabular matter, as all columns can be made up to multiples of points. In colimms of pica widths the lines become self-justif3dng; i.e., always take a certain nimiber of figures and certain even spaces to fill the line. For example, suppose a table with coliunns two picas wide, foiu: figures in each column. An en quad each side of the figures will just fill the measure. If there are six figures in a column and the column is three picas wide, twelve points will be required to fill the measiure. Foiu: three-point spaces, two on each side of the figiures, will make up the required twelve points. If the measiure is two and one-half picas wide, one three-point space on each side of the six figures will justify the line.

11. Point-thick Spaces. —^A survey of Table II also reveals the fact that certain spaces are exact multiples of points in thickness. That is, some are one point thick, some two points, some three points, etc. These spaces can frequently be used when justifying one size ot type with another. Fig. 6 illustrates the method.

•One 3-em space of twelve-point.

D" WILLIAM J. SMITH

>Two 3-em spaces of six-point.

Fig. 6.—^Showing Method of Justifying Type by the Use of Point-thick

Spaces.

12. Point-line.—Before the advent of the point system, type sizes were not even multiples of each other. If it was desired to justify one size of type with another it was sometimes necessary to use cardboard or thick paper as well as leads.

Digitized by VjOOQiC

Nowadays, all sizes are multiples of each other, and can readily be justified by the use of materials based on points. Moreover, the face of type is cast in such position on the body that it can be lined up by the use of material based on points. This is known as point-line,

13. Point-set. —One tjrpefoimdry made the experiment of casting type so that each letter or character was some multiple of a point, the idea being that after the line was composed a certain number of points in thickness would be

necessary to fill the line. The spaces were cast in multiples of points so as to readily fill the line. This plan was an excellent one so long as the type was new, but just as soon as the type got dirty the lines were no longer self-justifying. The Monotype System is based on a unit system, but it is a perfect success because the composed type is always new.

14. Legibility. —One of the essential things in printed matter is that it be legible. This requires that the space between words be modified to suit certain conditions. Widely leaded matter requires more space between words than solid matter. When matter is opened up between lines by the insertion of strips of metal, called leads, it is said to be leaded. When the leads are omitted the matter is said to be solid.

If straight matter, either solid or single-leaded, is being set, three-em spaces should be put between words; if the matter is double-leaded, en quads should be used between words. To have much space between lines and very little between words makes the line look like a streak across the page. When setting display lines, or lines that stand alone, the space between words should be governed by the width of the type face. Extended type requires wider spacing than condensed type. Lines in capitals require wider spacing than those in lowercase. In fact, every line should be spaced with the idea of rendering it legible.

15. Leading. —^When setting leaded matter always put the leads in while setting. If the matter is being set in a wide

measure and there are no leads wide enough for the purpose, it

Digitized by VjOOQiC

becomes necessary to double-up leads—^that is, to use two pieces that will just fill the measure. In doing this do not use pieces of equal length; if this is done, the halves of the job may slide on one another. The proper way is to use a long and a short piece, alternating them in the stick as in Fig. 7.

Fig. 7.—^The Proper Way to Double-up Leads.

If compelled to double-up leads, do not take from the lead-rack all the leads there are of any one size. Remember that various combinations of sizes will equal the length that you need. Do not rob the lead-rack; you may need the material on your next job.

16. Linotype Slugs as Spacing Material. —^If linotype slugs are used as spacing material, be careful not to place the side with the ribs on against the type, or the t3rpe will be loose and drop out.

QUESTIONS ON CHAPTER I

1. Why are lower-case letters scattered about the case instead of being placed in alphabetical order ?

2. Name a sentence containing every letter in the English

alphabet.

3. How can you differentiate between b and d, and between p and q ?

4. What is a ligature ? Why is it necessary to have them ? ' 5. What is a kerned letter ?

6. What is the Point System ?

7. Who invented the Point System ?

8. How many years elapsed before the Point System was finally adopted ?

9. What decimal part of an inch is one point ?

10. How many picas to one inch (approximately)?

11. How many picas to one foot (approximately)?

12. Name the type sizes under the old system that correspond with the point sizes of the new system, beginning with 5-point and ending with 12-point.

13. What is an em quad ?

Digitized by VjOOQiC

14. How do we measure composed type ?

15. What size em is used as a unit for measurement of length ?

16. What is labor-saving material ?

17. Name the different sizes of spaces that accompany the average font of type.

18. What is a thick-space ?

19. How many sizes of quads accompany a font of 12-point type ?

20. Figure out the actual thickness, in points, of the following spaces: a three-em space of 12-point; two five-em spaces of lo-point; an en quad of 8-point; two three-em spaces of 6-point.

21. Which is the thicker, an en quad and a three-em space of 12-point or an en quad and two five-em spaces of lo-point ?

22. If you needed an en quad of the size of type you were setting, and there was none in the case, what combination of spaces would you substitute ?

23. Explain the advantages of having an 8-point three-point space instead of the ordinary thick-space.

24. What do you understand by " point-line " ?

25. Explain " point-set."

26. Explain " legibility " as applied to composed type, and tell what we should do to conserve it.

27. Explain " leaded matter " and " solid matter."

28. How should leads be placed when doubling-up ?

Digitized by VjOOQiC

CHAPTER n COMPOSITION—SETTING PLAIN MATTER

17. Making up a Stick. —^Having learned the lay of the case and the fundamental principles of spacing and leading, the student is now prepared to take up the actual setting of type. The first step is to set the stick to a measure. This is technically known as making up a stick.

Several different kinds of composing-sticks are illustrated in Fig. 8. If one of the graduated kinds is used, it is simply



The first composing-sticks were one-measure, and made of wood. The illustration shows a stick about four hundred years old, now in the Typographic Library and Museum in Jersey City.

£

mM'l'lHl^l^l|l|a|4^ l^l^l^ l ^l^ ■
^^^l^.y^,^,y^,^^^^l^^^^^^.y^.^.M^,J

Star.



^^m9mmm»^.,.^,^.^M^^/

Rouse.

(^^ ^-^^^

Yankee. Standard.

Fig. 8.—Composing-sticks.

Digitized by VjOOQiC

necessary to set the measure desired to the size indicated on the stick and clamp the knee in position. If the stick be one of the older forms, and not graduated, it is necessary to make it up to some absolute unit. Students are prone to pick up leads, rules, furniture, or whatever may be at hand, and use them as units of length for making up the stick. This is a very un-

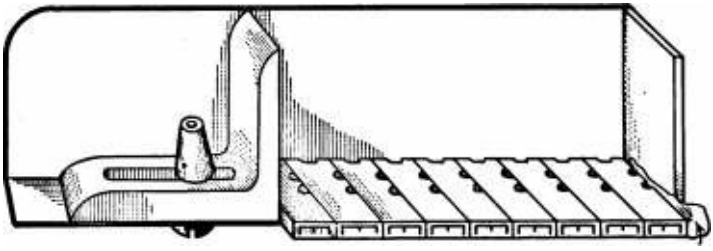

Piece of thin paper

Fig. 9.—^Proper Method of Making Up a Non-graduated Composing-stick.

certain method, and should not be allowed. The best method is to use capital letters of some twenty-four-point or thirty-six-point type, placing them bodywise in the stick (see Fig. 9), and inserting a piece of thin paper at the end of the line so that if leads are used they will not bind.

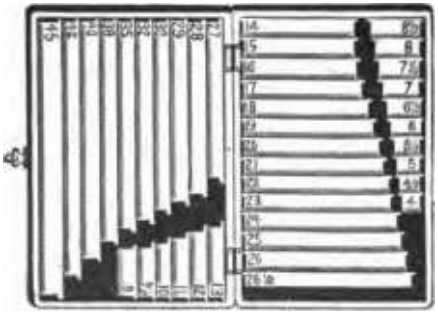

Fig. 10.—^A Set of Composing-rules.

i8. The Composing-rule. —^As it is almost impossible to set one line of type on top of another in a composing-stick, com-

Digitized by VjOOQiC

SETTING PLAIN MATTER

IS

positors provide themselves with composing-rules, shown in Fig. lo. These may be purchased in sets, varying in length from four to forty-five picas. They are provided with little ears at each end so as to be readily lifted out of the stick after each line is set.

Equally efficient ones may be made from odds and ends of discarded brass rule by cutting and filing to the forms shown in Fig. II.

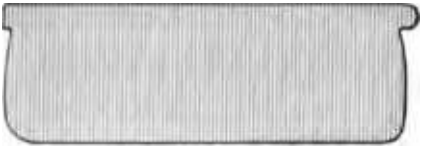

(a) (6)

Fig. II.—Composing-rules Made from Brass Rule.

The form shown at (b) is more easily removed from the stick, but cannot be used in sizes much below nine ems of pica.

19. Setting T3^e.—^With the copy on the stand before him, and with his stick and rule in hand, the student should read

his copy carefully, noting particularly the capitalization, spelling, and punctuation. Read a few words at a time, and set up the letters in proper order, beginning at the left-hand side of the stick. Type is to be set nick up in the stick. When setting type look at the letter as it lies in the case, noting the position of the nick, and in picking it up turn it so that it comes nick up in the stick. Do not look at the letter after you have picked it up, but look for the nick of the next letter while you are placing the first one in the stick. Cultivate this habit from the start, for on it depends your future speed as a typesetter. No attention need be paid to placing spaces and quads nick up. Some spaces are cast without nicks.

In order to keep the line under perfect control while being composed, the thumb, of the left hand is always held against the last letter of the line (Fig. 12), the end of the thumb being slightly raised as each letter is put into the stick. If the type

Digitized by VjOOQiC

is being set solid or single-leaded, use a 3-em space between the words. Continue setting until you have placed in the line all the words possible. If the final word on the line cannot be gotten in, and it is a word of more than one syllable, it may be divided. If the line does not exactly fill the measure, it is necessary to increase the spacing between words until the line is tight enough to stand alone when pushed up from the bottom of the stick. This is cabled justifying the line. Before doing this, however, the line

should be read for errors, and any found corrected. At the same time the thumb should be passed a few

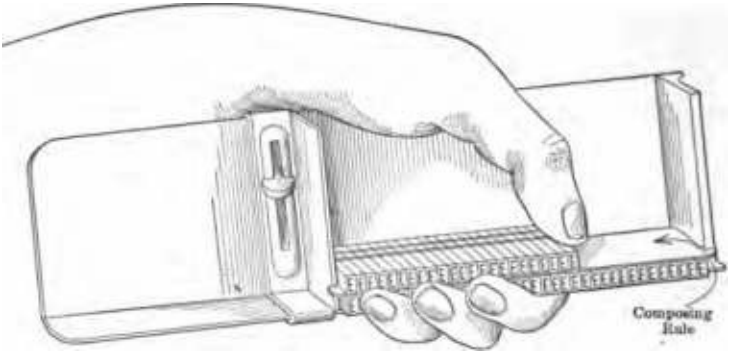

Fig. 12.—Correct Way of Holding Composing-stick in the Hand While Setting Type.

times across the body of the type to ascertain if type of a larger or smaller size has been placed in the line.

20. Justifjing a Line. —^After all corrections are made, the line should be spaced to fill the measure. Every line must be accurately spaced. If one line is longer than the rest, it will b-Bar off the furniture used in locking up the form, and the type will be loose, in which event it will drop out, or, worse still, will pull out on the press and cause some damage. Accurate and uniform spacing is absolutely essential. When justifying, the expert compositor notes how much space is required to fill the line, and, from experience, knows how much to put between

Digitized by VjOOQiC

words. The student can acquire the same skill by measuring how much the line is short, then counting the nimiber of places * requiring spaces, and putting in enough to fill the line. For example, suppose that a line is short—apparently two ems. We measure the space with a two-em quad and find that it just fills the Une. We then count the mmaber of places between words and find that we have ten places. The ten spaces must be increased by a total amount equal to a two-em quad. A five-em space is one-fifth of an em. Ten five-em spaces equal two ems. Therefore one five-em space added to each space in the line will just fill the measure. Again, suppose that the line only lacks one-half or one-third of an em of being full. In this event, we must find some combination of thin spaces that we may substitute for the three-em spaces ordinarily used between words. We look along the line and note where the combination of two tall, straight letters come together in the line. This is where we should always begin to increase the spacing in the line.

21. Uniform Spacing. —If a line has spaces of uniform thickness betweefi words, it will not appear to be uniformly spaced. If it contains words beginning or ending in tall, straight letters, there will appear to be less space between them than between rounded letters like o, c, and e, or after sloping letters like v, y, w, or a comma. It should always be our object to make the line appear uniformly spaced. To accomplish this we should, if possible, have a little more

space between the high letters than at other places. The rule, therefore, is: "// necessary to increase spacing to fill a line, do so by increasing the space alongside of straight letters; if necessary to decrease the space to get a word in a line, decrease the space after sloping letters or between rounded letters.^' Of course, if necessary to increase or decrease at every place throughout the line, we must do so, but in doing so we must endeavor to have the spacing appear imiform.

22. Rules for Spacing. —^We should endeavor at all times to have enough words in the last line of a paragraph to more than cover the indention of the next paragraph. If the last line of a

Digitized by VjOOQiC

j>aragraph lacks one em of being full, space the line to full length. Never have less than one em as a blank or quad line at the end of a paragraph. If the last line of a paragraph is short one em or more, do not space it out to full length; the paragraph will be more distinct if the line is short. However, do not sacrifice the appearance of the spacing in order to make a line shorter. If possible, have the space between words in the last line of a paragraph the same as in the line preceding it.

When spacing a line endeavor to have equal space, each side of small words.

Put a thin space (usually a five-em space) before a colon, a semicolon, an interrogation mark, and an exclamation mark. Place an en quad after these marks if they occur in a sentence. If the interrogation mark or the exclamation mark ends a sentence, place an em quad after it.

In all lines of type that contain quads and spaces, place the spaces alongside of the type, where they may readily be found. Scattering spaces among the quads in a line is a fruitful source of dirty quad-boxes.

While spacing is an extremely important matter, and may make or mar the printed page, it is inadvisable to leave out marks of punctuation or to make improper divisions of words to obtain uniform spacing.

23. Empt3ring the Stick.—Continue setting until the stick is nearly filled with type. Place the composing-rule between the bottom of the matter and the stick, and have a lead or two at the top, so as to obtain a firm grip on the matter. Place the stick on the case or on a galley and remove the type with a rolling motion. Fig. 13 illustrates this better than words can describe it. Care must be taken to place the balls of the thumbs, and not the tips, at the top of the type or the matter will cnunple up and go to "pi." As the matter is withdrawn from the bottom of the stick, gradually slide the balls of the thumbs down on the type, thus obtaining a firmer hold, at the same time placing the middle finger of each hand firmly against the ends of the matter. Do iwt unfasten the stick to

remove the lines.

Digitized by VjOOQ IC

24. How to Use the Galley. —^Having removed the t>pe ^ from the stick, place it on the galley as shown in Fig. 14. Never

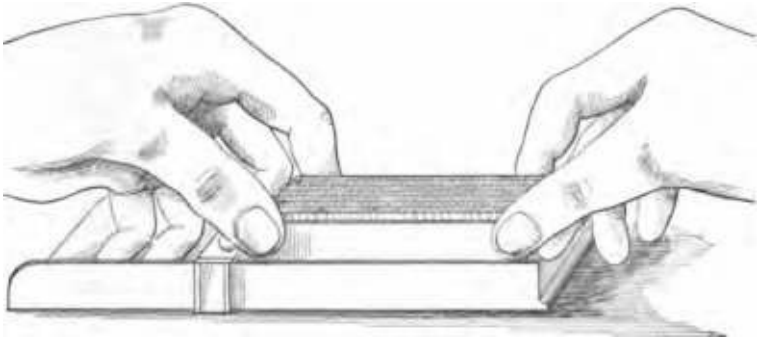

Fig. 13.—Empt3dng a Stickful of Type.

place it on a galley in any other way. Always stand as shown in Fig. 15 when correcting or making up a job.

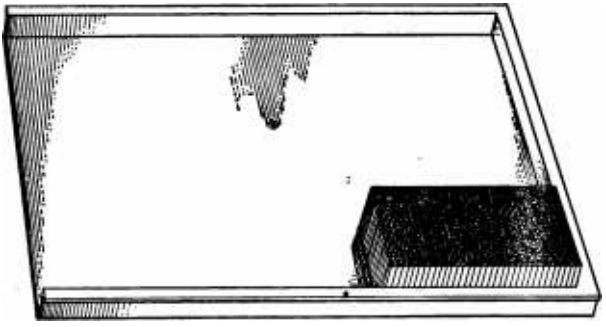

Fig. 14.—^Proper Way to Place a Job on a Galley.

25. Tying up a Job. —When the type is set and placed on the galley, the next step is to tie up the job. The very best cord for this purpose is that known to the twine trade as Seine No. 12. When tying up a job, begin at the upper left-hand comer, and, holding about one-half inch of the cord between the thumb and index-finger of the left hand, pass the cord once

Digitized by VjOOQiC

around the job and cross the cord over the first layer as in Fig. i6 (a). This will hold it fast to the corner. Wind on two or

Fig. 15.—Correct Way to Work at the Composing-stand.

Loop tacked beneaCh sMng. End kei

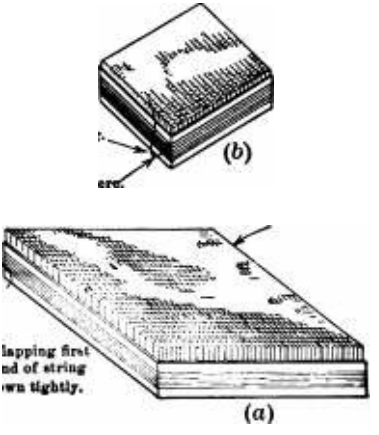

Besrin here, lapping firbt layer over end of string to hold it down tightly.

Fig. 16.—Showing How a Job Should Be Tied Up.

three layers, then move the job away from the corner of the galley and push the string down on the type. Do this carefully. Continue winding until five or six layers have been put

Digitized by VjOOQiC

on. If the cord is of sufficient length, finish the winding at the upper right-hand corner, and tuck it in, as shown in Fig. i6 (6). Keep a firm hold on the job while tying it up, and be sure that the cord is taut at all times. Do not cross one layer of cord

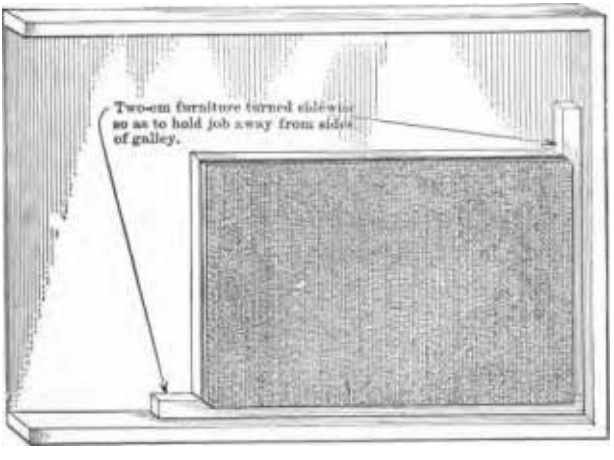

Fig. 17.—Showing How a Bulky Job Shciild Be Handled.

over the other, as it will catch under the other layers when being removed and very likely put the job "off its feet."

If the job is too bulky to be pushed away from the corner of the galley w^hile being tied, it should be arranged as shown in Fig. 17, using two-em furniture turned sidewise.

QUESTIONS ON CHAPTER II

1. What is a composing-stick ? How should it be held in the hand ?

2. How should a composing-stick be set to measure ?

3. What is a composing-rule ? Why is it necessary to use one ?

4. What is the purpose of having a " nick " on one side of a type ?

5. How should type be placed in the stick ?

6. What special habit should you cultivate as an aid to rapid tvpe-settin. ?

7. What name is given to the act of spacing a line to full length ?

8. What method have you for determining when a Une is accurately set to the measure ?

Digitized by VjOOQiC

Q. What trouble is apt to be caused if one line is longer than its neighbors?

la What method have you for determining how much additional space to put between words when you are justifying a line ?

11. If you were setting double-leaded or triple-leaded matter would you use a single thick-space between words ? Give reasons for your answer.

12. Should words that stand alone on a page have more or less space between them than when run in with other matter ?

13. Why is accurate spacing more desirable than xiniform spacing ?

14. Why is accurate justification so essential ?

15. How should a stick be emptied ?

16. Describe how you would proceed to tie up a medium-size page. If the page were a large one how would you proceed ?

Digitized by VjOOQiC

CHAPTER m

TAKING A PROOF, CORRECTING THE JOB, AND RETURNING TYPE TO CASE

26. Placing a Job on the Stone. —It is obvious that if any grit should get beneath the type it will cause it to punch through the paper when pulling a* proof. Every effort should be made to prevent such an occurrence. Before sliding the t)^ from the galley to the stone, be sure that the stone is clean.

27. Pulling a Proof. —Before pulling a proof, the job should be made level by the use of the form-planer (Fig. 18), which is placed on the job and given a few light taps with a mallet. Ink the job with a hand-roller or brayer, being careful not to have too much ink on the roller. Then take a sheet of proof-paper,* hold it at diametrically opposite corners, allowing it to sag slightly in the middle, and place it carefully on the job. Do this by allowing the middle to touch the form first, gradually lowering the corners. Do not let the paper slip or drag over the form, or the sheet will be smeared. Now take the proof-planer (which is the same as a form-planer, but with the face covered with felt) in the left hand, place it steadily and firmiyy face down, on tho paper, and strike it a fairly sharp tap with the mallet. Raise the proof-planer slowly and with a tilting motion, and move it t^ a new position. Go over the job in this way imtil every part has been impressed on the paper. Whether or not the proof is likely to be a good one can be judged from the impression in the paper. If it appears weak at any point, go over that part again. Remove the sheet by raising it at opposite comers.

* A paper known as French Folio is frequently used, though the author prefers " Dry Proof Paper." The latter has a glossy side that is especially adapted for the work.

Digitized by VjOOQiC

The secret of obtaining a good beaten proof is in the manner of placing the proof-planer on the form, and in removing it. If the planer slides, slips, or jimips when it is struck, it is apt to move the paper and spoil the proof. Hold it down firmly. If it is raised suddenly to move it to a new position, it will create a suction and raise the paper from the type, thus spoiling the proof. Tilting the planer when raising it helps to avoid this.

Fig. i8. —Method of Holding and Tapping a Form-planer.

28. Proofs in Colors. — If a proof of a job is required to be submitted in colors, such proof may be secured with

comparative ease provided there is no overlapping of the colors. Suppose, for example, that a proof is to be pulled in two colors-^ the main body of the job in black with a few touches of red. Ink the whole job with black ink. With a clean rag wipe off the black ink from those parts that are to be in red and, w^ith the aid of a small piece of roller composition, re-ink them with red ink. If the lines are so close that they cannot be cleaned and re-inked without touching the others, they can be raised slightly above the surrounding surface by the use of a bodkin.

Digitized by VjOOQiC

After the whole job is properly inked, the proof may be pxJJed as already explained.

29. Galley-press. —Straight matter is usually placed on long galleys and proofs pulled on a galley-press. This is a framework surmounted by a flat bed, on the sides of which are raised tracks on which rolls a solid iron roller covered with felt. The frame contains a bin or cupboard for the acconmiodation of proof-paper. Fig. 19.

To obtain a proof on a galley-press the galley containing the type is placed on the flat bed, the type is inked with a brayer,

Fig. 19.—GaUey-press.

a sheet of paper is placed on the type, and the roller is run over the face of the type. Owing to the fact that the roller frequently squeezes the type into the paper, the paper is apt to slip over the face of the type and smear the proof. This can be avoided by holding the paper tightly against the roller and rolling them together over the face of the type. Care should be taken to see that the galley has not too thick a bottom, for if the impression is too heavy there is no way of altering it. If the impression is too light, a thin cardboard or a sheet or two of manila paper under the galley will correct the fault. The rress is intended only for rjalicys of type, not for small jobsi

Digitized by VjOOQiC

PRINTING

30. Press-proofs. —In large offices proofs of jobs are

usually pulled on proof-presses. There are many devices for this purpose. Some are worked on the plan of a cylinder press, inking the form and carrying the sheet through automatically. In others, the form is first inked and then the mechanism set in

Fig. 20.—^Washington Hand-press.

motion to obtain the impression. When jobs are too large to go on a proof-press, they are placed on the stone and proofs beaten off with a proof-planer. When proving book forms, where the pages are laid in pairs, the two pages which are

back to back should be proved on one sheet, and the sheets then folded into book form.

Digitized by VjOOQIC

31. The Washington Hand-press. —^This is a familiar type of proof-press, wherein the form is inked, covered with a sheet of proof-paper, the tympan lowered, and the bed moved under the impression-plate. A hand-lever exerts a downward motion and gives the impression. The bed is then withdrawn, the tympan lifted, and the sheet removed. (Fig. 20.)

32. The Poco Proof-press. —^This press consists of a bed and a cylinder racked to move in unison. The form is placed on the bed, inked with a brayer, a sheet of proof-paper placed on the form, and the cylinder and form rolled into contact by

Fig. 21.—^The Poco Proof-press.

the aid of a crank. The bed need not be returned for the next proof, as it can be worked from both ends. (Fig. 21.) If desired, the sheet may be slipped under a rod that acts as a gripper, and the sheet run around the cylinder.

33. The Potter Proof-press. —^There are several types of this press on the market, some of them having automatic inking devices. In this press the cylinder rotates in stationary bearings, the bed moving forward and backward, as in an ordinary cylinder press. Grippers hold the sheet to the cylinder while the impression is being taken. An impression-trip is provided so that the cylinder may be raised and the bed returned to its original position without touching the cylinder. (Fig. 22.)

Digitized by VjOOQiC

34. The Vandercook Proof-press. —^This is an automatic, self-inking, cylinder proof-press (Fig. 23). The sheet may be

Fig. 22.—^The Potter Proof-press.

laid on the type and the cylinder run over it, or the sheet may be fed to the grippers on the cylinder. In this make of press the

Fig. 23.—^The Vandercook Proof-press.

bed is stationary and the cylinder rolls over the form. At the

end of the stroke the cylinder is automatically raised so that it may be returned without soiling the tympan.

Digitized by VjOOQiC

35. Correcting the Job. —When a good proof is seciu-ed, it is sent to the proofreader to be read, after which it is returned to the compositor for correction. If there are but few errors, and the letters to be substituted for those in the job are of the same thickness, the job may be corrected on the stone. If they are not of the same thickness—^and this is usually the case— the job must be placed on a galley, the string removed, each line taken up again in the stick, the error corrected, and the line accurately respaced.

If it is necessary to overrun a few lines in making corrections, turn them around on the galley, so that the beginnings of the

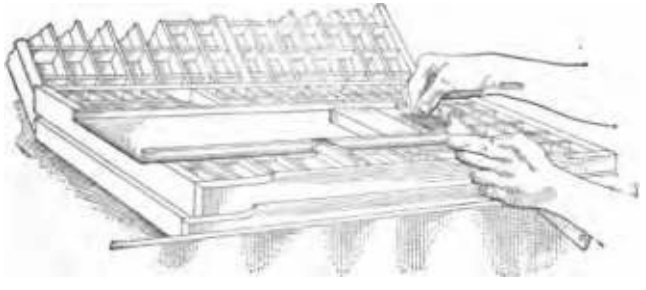

Fig. 24.—Overrunning Type.

lines are away from the edge of the galley. It is then possible to take off a few words at a time from the beginning of a line and reassemble the matter in the stick. See Fig. 24. It is very much easier and quicker to overrun matter in this way than to put down the stick and take up each line individually.

Another, and perhaps equally good way, is to spread the lines out on a long galley, so that the type matter reads consecutively, being sure to place a space at the end of each line unless the last word has been divided, in which case the hyphen should be removed. The matter may now be measured off with the composing-rule into line lengths, and each line taken up individually and rejustified.

Digitized by VjOOQiC

Always hold the stick in the hand while spacing lines. Never try to correct one line in a stick after you have started to set another. Do not place the stick on the stand and attempt to pull out the spaces with tweezers. Hold the stick in the hand, remove the last letter in the line so as to loosen it, then proceed with the correction.

It is absolutely impossible to accurately space a line unless it is placed in a stick. Attempts to correct jobs on a galley or stone have entailed a greater loss of time in locking up than any other one thing. If a single line be longer than its fellows,

it will prevent them from being locked tightly. Every line should be of uniform length. Time will be saved by doing the work right in the first place.

36. PulUng a Revise. —^After the job is corrected, another proof, called a revise, is pulled. This is sent to the proofreader along with the first proof. If the corrections have not all been made,, it is again returned to the compositor. If they have been properly made, the last proof is sent to the author.

37. Saving Cord for Future Use. —^When a job is untied, the cord should be carefully folded for futiu:e use. This should be done as illustrated in Fig. 25.

38. Making Up Pages. —Straight matter, whether it be hand-set, monotyped, or ILiotyped, is assembled on long galleys. After proofs are pulled and the type corrected, the matter is ready to be made up into pages. In this proceed as follows: make a gauge of a piece of cardboard, lead, or reglet by marking the exact length the type-face of the page is to be. With this gauge cast off the matter into pages, inserting a small piece of cardboard or lead to show the separation of the pages. In this way go over all the matter. It will very likely happen that the matter does not separate nicely into pages, and it may have to be recast into better form.

There are many things to be kept in mind when making up pages. Never have a single break-line at the top of a page or

beneath a cut. If possible, never have a paragraph with a side-

Digitized by VjOOQ iC

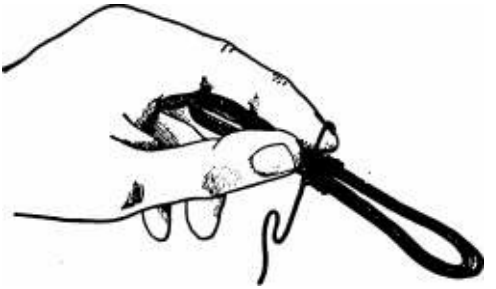

Last wrap of binding-layer looped over left index-finger.

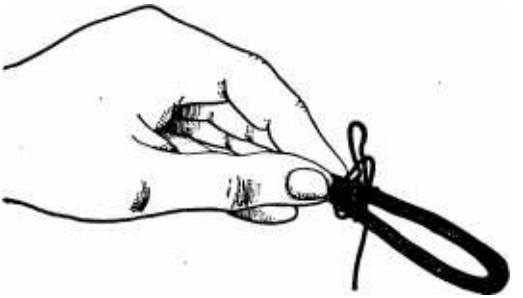

Loop in strand slipped through last binding-loop.

Loop slipped through last binding-layer and drawn tightly.

Fig. 25.—^Illustrating Method of Tying Cord for Future Use.

Digitized by VjOOQiC

heading on the last line of a page—carry it over to the top of the next page. Try to avoid having headings near the bottom; frequently a little rearrangement of the matter will obviate this. If the last part of the matter does not fill a page, the balance of the page should be left blank. If possible, have the last page at least one-third full of type. If the cast-off leaves but two or three lines on the last page, it is better to have the few previous pages each a Une long than to put these few lines in a page by themselves. If there is a rimning head with a foUo, the folio should be placed on the outside of the page; i.e., to the left of a left-hand page, to the right of a right-hand page. If the folio be simply a figure or numeral, it may be either at the head or foot of the page. A foUo at the foot, however, presents the better appearance.

39. Cleaning Type. —^After the type has been printed from, and before it is distributed, it shoiLv.. be thoroughly cleaned. If this is not done the type will, in time, become so dirty that it is almost impossible to keep a line on its feet. This condition should not be permitted to occiu:. If a form comes from press in a dirty condition, it should be taken apart, each page tied up loosely, and then the type put to soak overnight in a pan of lye-water of medium strength. In the morning it should be removed and scrubbed with a brush, then thoroughly rinsed under a tap. To accomplish this it may be

necessary to put the pages on a metal (not wooden) galley, untie them, and let the water get in between the letters.

40. Cleaning Rules. —^The directions given above for cleaning type also apply to cleaning brass rules. If dirty rules are soaked overnight in weak lye-water, in the morning they may be rinsed under a tap and wiped clean with a rag. It frequently happens, however, that rules are not properly cared for, and it becomes necessary for the compositor to clean a piece before it can be used. The usual method in such cases is to flood the rule with benzine or other detergent and rub it on the stone. A much better way is to provide a piece of strawboard and saturate it with the detergent and rub the rule on it. Rubbing

Digitized by VjOOQiC

the rule on the stone is very apt to round off the ends or face of the rule; with the strawboard this will be obviated. Border units that have become encrusted with ink can be cleaned in th< same way.

41. Distributing T3rpe. —Returning the letters to theif proper places is called distribution. If the type is all of one size and kind, place it on a metal (not wooden) galley and wet it with clean water, using a sponge for the purpose. Wetting type accomplishes two apparently opposite things: it causes it to come apart and also to stick together. If the type is gummed fast from an aggregation of ink, dirt, etc., the

water

Fig. 26.— How Type Should Be Held in the Hand while Distributing.

will loosen it; if it has a tendency to fall apart it will cause it to adhere.

Fig. 26 shows how type should be held in the hand while distributing it. The novice is advised to begin by taking a few lines at a time, for if he should drop any type, as frequently happens, he will have less type to pick out of the case. As he increases in skill he may take larger amounts.

Hold the type nick up, and begin at the right-hand end of the line. Take off a whole word, separate the letters, one by one, and place them in their respective boxes. The method of separating the letters is shown in Fig. 27. The type is held against the thumb by the index-finger, and the middle finger tilts the letter from beneath the index-finger. At the same time, the two fingers are moved backward and forward over the thumb,

Digitized by VjOOQiC

^ thus constantly advancing the first letter so that it will escape from beneath the index-finger. Proceed in this manner until all the type has been returned to the case.



Fig. 27.—Separating Individual Letters While Distributing.

If the matter to be distributed is a job containing display lines, all the lines of the same size and kind of type should be

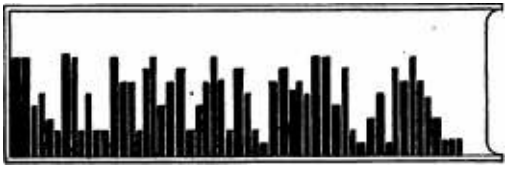

Leads and slugs as placed on the galley.

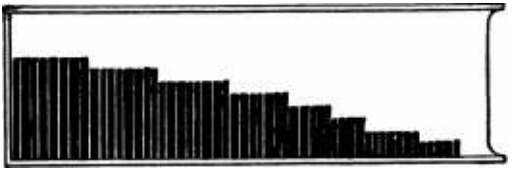

Leads and slugs after rearrangement. Fig. 28.—Sorting Leads and Slugs.

grouped together on the galley and carried to the cabinet

where they belong. This avoids useless walking back and forth. Jot

Digitized by VjOOQ iC

type should be held in the hand and distributed as described under plain matter.

Do not drop or throw type into the case; place it in carefully^ as it is easily battered,

42. Putting Away Leads and Furniture. —^After all the type in a job has been distributed, return the fiurnitiure and leads to their proper places. If there is more than one size of leads used in the job, or if it is your duty in the ofl&ce to put away leads, proceed as in Fig. 28. Stand them on end, as shown, then go through the lot, picking out first the largest size, and rearrange them as shown. They are now graduated as to size. Take up each lot of like size and measure it with a gauge. If it is of a labor-saving length put it in its proper box. All bastard lengths should be kept in a separate place. Consult the foreman and ascertain his wishes regarding them.

QUESTIONS ON CHAPTER III

1. What special care should you exercise when placing a job on the imposing-stone ? Why ?

2. Describe the pulling of a hand-proof.

3. How would you avoid the tendency of the proof-planer to lift -the sheet while pulling a hand-proof ?

4. Describe the method of inking a job when a proof is to be pulled in two colors.

5. Is it advisable to make corrections in lines of type without placing them in a stick ?

6. What is a revise ?

7. Demonstrate the proper method of tying up string for future uce.

8. How should straight matter be cast off prior to being made up into pages ?

9. Name some things that are to be avoided when making up pages.

10. How should t)^e be cleaned ? What happens when type become? very dirty?

11. How should brass rule be cleaned ? Why is it so essential ?

12. How should type be held in the hand while distributing ?

13. Why do we wet tjrpe before distributing ?

14. Show by the use of your fingers just how the types arj separated during the act of distributing.

15. How should leads and slugs be sorted ?

Digitized by VjOOQiC

CHAPTER IV

TYPE CALCULATIONS

43. How Much Will It Make? —It is frequently necessary to determine how much matter a certain piece of copy will make when it is set in type. This may readily be calculated. The first step is to approximate the number of words in the copy. This is accomplished by multiplying the niunber of lines in the copy by the average number of words in a line. In averaging the number of words in a line assume that a word of seven letters is a normal word; call two small words one and a very large word two. If it be manuscript copy we may have to go over it all, unless it runs fairly uniform. With typewritten copy, which is more uniform, and easier to calculate, find the average number of words per line, multiply by the number of lines to get the number of words per page, then multiply this by the number of pages to get the total number of words in copy.

Having determined the number of words in copy, set a line of the type to be used, and find the average number of words to

a line. Dividing the number of words in copy by the number in one type line will give the number of lines the matter will make in type. For example, if the copy contains 10,656 words and the type runs eight words to a line, then

—^^^ = 1332, the number of lines of type.

o

If we wish to determine how many inches the matter will make after it is set, wt can do so by changing the dimensions from ems to points, and then to inches. Count 72 points to the inch. Multiply the size of the body of the type by the number

of lines to change the dimensions to points, then divide by 72 to change to inches. In the example given above, if the type were ten-point, there would be

10X1332 - . ,

'^^ = i8s mches.

72 ^

If the job were set in eight-point, and contained 1200 lines, then the matter would be 133^ inches long. Thus,

8X1200 , . ,

—--— = i33t mches. 72

li the matter is to be monotyped, and the copy is typewritten, it may be easily calculated. It has been found that fifty-three typewriter characters always equal twenty-five set ems. Therefore, approximate the number of characters in the typewritten copy, counting spaces between words as characters, divide by fifty-three and multiply by twenty-five. Thus, if the copy contains 10,722 characters, it will make 5058 set ems.

10,722X25 o ^

— = 5058 set ems.

The same result may be obtained by multiplying the number of typewriter characters by the constant .4717. This constant is obtained by dividing 25 by 53.

25

—=•4717

53

.4717X10,722 = 5058 set ems. •4717

10,722X^5 o ^

— ^^=5058 set ems.

44. What Size Type Shall I Use?— If it is desired to fill a

certain space with a certain piece of copy, the size type to be

Digitized by VjOOQiC

used may be detennined as follows: first calcidate the number of words in the copy, as explained in the preceding section. Next try a line of the size type estimated to be of the proper size. Then count the number of words to one line of type, determine how many lines may be gotten into the allotted space and multiply these two factors together to obtain the total number of words. If the number is slightly greater than the number in the copy, the right size of type has been chosen. If the nimiber of words in the copy is greater than the type will accommodate, a smaller size type must be used. If the number of words in the copy be less, use a larger size type.

If the calculations show that one size of type is too small and the next size larger is too large, the matter may frequently be made to fit the space by setting it in the smaller size type and leading with either one-point or two-point leads.

To determine how many lines of any size type may be gotten into a given space, determine the size of the space in inches, multiply by 72 to change dimensions to points, and divide by the size of the body of the type. For example, the number of lines of ten-point type that can be gotten into six inches is found thus:

6X72 y

^=43.2 lines.

10

Ignore the two-tenths, and count on forty-three lines. K ten-point runs ten words to a line, 432 words may be placed in the six-inch space; if it runs six words to a line, only 258 words will go in the six inches.

45. Determining the Number of Ems in Composed Matter. — ^When type is set without display lines, as in books, magazines, and newspapers, it is known as straight matter. If the compositor is working by the piece he is paid for his work according to the number of ems that it contains. To determine the contents in ems it is customary to measure the matter with a type-gauge, and thus find its width and length in ems of the type in which it is set. Multiplying the number of ems

Digitized by VjOOQiC

in width by the number of ems in length will show the total nimiber of ems.

If a type-gauge is not at hand, the same result may be secured by using a rule graduated in inches. Count seventy-two points to an inch. To determine thtf number of ems multiply the number of inches by seventy-two and divide by the em of the

body. Do this both for the width and the length, and then multiply the one by the other.

Example, —Suppose a piece of matter set in eight-point is four inches wide by twenty inches long. Then,

4X72 288 . .,

—g^=-g- = 36 ems wide,

20X72 1440 o ,

—g-^=-g— = 180 ems long,

36 X180 = 6480 ems.

Sometimes the length of a line of type will exceed an even number of ems of the size in which it is set. If this excess be less than half an em, it is not considered; if it be half an em or more, it is counted as a full em. Never make calculations in fractions of an em.

When lines of type have leads between them the matter is said to be leaded^ when leads are omitted it is said to be solid. Piece-workers prefer to set leaded matter, because they get paid for the area that the matter covers, and not for the actual number of lines set.

46. Determining the Value of Composed Type. —^To determine the value of composed type, point oflF the number

of ems into thousandths, and multiply by the rate per thousand. For example, to find how much the matter of the preceding problem would be worth at forty cents per thousand, 6.480X40 cents=$2.59.

Some printers sell composition on a square-inch basis. That is, they measure the area of the composed matter and charge

Digitized by VjOOQiC

for it at so much per square inch. Table III shows the selling rate per square inch for various sizes of type at various rates per thousand.

TABLE III.—RATES PER SQUARE INCH FOR COMPUTING VALUE OF COMPOSED TYPE

The value of composition per square inch in all sizes of type, from 4^-point to i2-point, at 60C., 6sc., 70c., 7Sc., 8oc., 850., 90c., pSc, li.oo, li.os. and $1.10 per 1000 ems. A type-gauge is not always at hand, bui foot-rules are plentiful.

Example. A page measuring 4I X6 would Contain 27 square inches, if set in 8-point type and figured at 90c. per 1000 ems, multiply by .0729, as per table, and the correct result is 11.97. If any other rate is required, use the corresponding figures.

This square-inch method is based on the rate per thousand ems. To find the cost of one square inch of any size type, divide the price per thousand by looo to find the cost of one em, then multiply by the number of ems in one square inch. As there are seventy-two points in one linear inch, there are 5184 square points (72X72) in one square inch. Divide this factor by the number of square points in the size of the body of the type being measured.

Example i. What is the square-inch rate for eight-point type at sixty cents per thousand ?

An eight-point em is square, therefore it contains sixty-four square points (8X8). 5I84-^64=8I ems to the square inch. At sixty cents per thousand 60 X 81-^ 1000=$0.0486 per square inch.

Digitized by VjOOQ iC

Example 2. What is the square-inch rate for ten-point type at seventy-two cents per thousand?

loX 10= 100 square points in one em;

5184-^ 100= 51.84 ems per square inch.

72X51.84-^ 1000=$0.0373 per square inch.

47. Determining Weight of Type by Measurement. —

One square inch of type weighs, approximately, one-quarter of a pound. To find the weight of any composed page of type either multiply the number of square inches by one-fourth or divide by four.

Type matter is usually set to some measure in picas. To avoid calculating in fractions of an inch, it is sometimes easier to determine the size of the page in picas. There are thirty-six pica ems in one square inch, or 144 in four square inches. Picas may therefore be changed to pounds by dividing by 144.

Example. How many pounds of type in one page of this book ? Size of page, 22X38 picas. If worked on the square-inch basis, change the picas to inches, thus: 22 picas=3! inches; 38 picas = 6^ inches. Then 3! X 6| = 23!.

231-^4= 5-8 pounds.

On the pica basis, 22X38-^144=5.8 pounds.

48. Determining the Amount of Leads to a Page. —^Two-point leads run about 144 inches to the pound; three-point leads, 96 inches; and one-point, 288 inches. As there are six picas to the inch, if each of these factors be multiplied by six, new divisors are obtained based on picas. To avoid fractions it is easier to work on a pica basis. For two-point leads divide by 864; for three-point, 576; for one-point, 1728.

Digitized by VjOOQiC

Example, How many pounds of two-point leads in a page of this book ? Twenty-two picas wide, thirty-seven leads to the page; 22X37-^864 = .94 pound, or about 15 ounces.

PROBLEMS ON CHAPTER IV

1. If copy contains io,cxx> words, and we can get eight words in a line of t)rpe, how many lines will it make ?

2. Copy consists of ten pages of manuscript averaging thirty lines to a page and eight words to a line, how many lines of type will it make if we can get ten words in a line ?

3. If we wish to prepare copy so that it will fill a certain space, and we determine that the size type we wish to use runs nine words to a line, how many words should we write to fill ninety lines ?

4. How many lines of each of the following sizes of t)rpe can be gotten into a page six inches long: 6-point, 7-point, 8-point, 9-point, lo-point, ii-point, i2-point ?

5. How many ems of o-point in a page 4X7 inches ?

6. How many ems of i o-point in a line 25 picas long ?

7. A page set in 8-point, solid, contains 54 lines, if it is 24 picas wide how many ems does it contain ?

8. What decimal part of an inch is six picas ?

9. If you measured a piece of furniture with a foot-rule and found it to be 6 J inches long, what would you say its length was in picas ?

ID. How many picas in J inch ?

11. How many ems of 9-point in J inch ?

12. If copy contains 690 words, what size type would you use to fill a space 4X7 inches, if you found on trial that io-point averaged seven words to a line, 9-point averaged nine words, and 8-point eleven words ?

13. If the copy in Problem 12 contains but 600 words what size type could you use, and how would you make it fit the space ?

14. How many pounds of type in a page 4X7 inches ?

15. If a type page is 26 picas wide and 30 picas long how much does it weigh ?

16. If a page of 8-point type is 30 picas wide and 63 lines long, how much does it weigh ?

Digitized by VjOOQiC

17. If we were to lead the page in Problem 16 with 2-ppint leads how much would it weigh ?

18. Two-point leads are put up at the typefoundry in packages containing ten pounds. If the strips are twenty-four inches long, how many are there in a package ?

19. Determine the number of ems per square inch for each of the following sizes of type : 6-point, 7-point, 8-point, 9-point, lo-point, ii-point, and i2-point.

20. How many strips in a pound of 3-point leads ?

21. How many pounds of 2-point leads will be required to lead a piece of lo-point matter, if the latter is 23 picas wide and 20 inches long ?

22. What is the selling rate per square inch for 6-point type, if it is based on forty cents per thousand ?

23. Some monotyped matter was found to contain 12,675 ems, how many typewritten characters were there in the copy ?

24. If the carrying capacity of a floor in a printing office is 1008 pounds per square foot, how many pages 3X6 inches in size can be piled on a space 12 inches square ?

25. Type is frequently stacked in layers with cardboard between each layer. If we ignore the weight of the cardboard, what will be the weight on a square foot of floor space if we have eighteen layers of type ?

Digitized by VjOOQiC

CHAPTER V

PROOFREADING *

49. Requirements for Proofreading.— It has been said that anyone who possesses a thorough knowledge of grammar, etymology, syntax, and orthography is qualified to read proof. This may cover seventy-five per cent of the knowledge required of a proofreader; the other twenty-five per cent consisting of a knowledge of indentions, make-up, wrong fonts, and niunerous other things embraced under the term "style of the office." Employers much prefer to have as proofreaders men who have

* Note. —Teachers are urged to make proofreading a strong feature of their courses in printing. The author has been doing this ever since he took charge of the printing course at the Philadelphia Trades School, and he finds that it affords abundant opportunity to speak on many topics connected with the trade. All of the lessons have some bearing on printing or an allied subject, and thereby serve a twofold purpose. Errors are purposely introduced and then commented upon.

These include spelling, punctuation, syntax, grammatical construction, improper divisions, transposed lines, typographical errors, bad make-up, bad spacing, etc.

The author's plan of handling this subject is to give each boy in the class a printed copy of the lesson and have him mark such errors as he can detect. After each boy has completed the reading of his proof, the boys exchange papers and prepare to check up each other's corrections. Each boy then reads a paragraph aloud. As he proceeds, the errors are taken up in turn and commented on, and proper usage described. The subject matter of the text frequently comes in for explanation and discussion. In this way much valuable information is imparted that would not otherwise come before the class.

Errors of commission in punctuation are held against the boy just the same as errors of omission, for it has been found that students mark in and mark out, ad libilum, in the hope that nothing is being overlooked. A student does not learn anything from such an indiscriminate placing of punctuation marks. He should be taught to use them correctly.

had considerable experience at the case. These men, being familiar with the methods of the trade, are more apt to detect errors than those whose training has been in language construction alone.

Proofreaders should keep in mind that each author has his own style of writing, and that, if the author has made his meaning clear without violating the rules of grammar, it is not their province to alter the construction. If, however, an author has disarranged his words, and befogged, rather than clarified, his exposition, it is clearly the proofreader's duty to suggest change.

50. Proofreaders' Marks. — The marks commonly used in proofreading are shown in Table IV. These should be studied imtil their meaning and use are clearly imderstood. Page 48 shows a marked proof and page 49 the same corrected.

The first few marks in Table IV, showing underlining of words, are used particularly in the preparation of copy. Three lines drawn beneath a word signify that it is to be set in capitals; two lines, that it is to be set in small capitals; one straight line, in italic; one wavy line, in boldface. Use of other proofreaders' marks will usually be clear from a careful examination of the table and of the accompanying sample of corrected proof. Particular attention is called, however, to the use of the dele mark, d^. This mark is encoimtered in various forms, for proofreaders do not all make it alike. All forms, however, have the same meaning; that is, take out, or remove, whatever has been marked. Its use should be restricted to the marking out of words or characters that are to be taken out entirely. When one character is to be substituted for another there is no need to

use the dele mark. If the character to be removed is a hyphen in a compound word, and the two parts are to be united, use a ligature above and below the dele to show that the words are to be brought together. If the hyphen is to be taken out of a compound word and two separate words used, substitute a space mark (#) for the hyphen.

Digitized by VjOOQiC

TABLE IV.—SYMBOLS EMPLOYED IN PROOFREADING



Putfa^ Putin SgALLCAh TAiari

Put in CEowEi <:Akg?^

Put i qf^wgqK ype

Put in otaiicJ tvDe.

Put in lbold taoeK ype.

Wrong UQi: character of wrong sue or

style. Trans{@e. Dele: take^out. Letter ^Irened—turn. Uarry to the left ^ 0^ '^tialw ^ry to the right.

X l@berfect letter—correct. 4f Space show^)etween words —shove down. Q ©a 9 ^ndent.

4 |^ Putinspaoe.

^^ OQeup-no space.

4L# &%^^ »' A # <2*«- Bad/q)acmgr«>aoemore/evenly. .^^^ a«» t^Q^ ' gggigStt n crooked line. • • • •% <fc^ RestOTe dS w s lai n J terords crossed out. ^^,ctCn Print(ae,^,etc.)asak)gotype.

O Period. Always make a drde ardUnd the dot, so that the period will not be mistaken for a comma or a blemish in the paper. ^S Signifies comma. >^ Signifies apostrc^phe. 1;y XJ^ Quotatkm marks. «y Signifies hyphen. ^ Signifies colon.

jf Sgnifies semicolon. Lisj Signifies one em dash.

H

'(

Sgnifies two em dash. Signifies interrogation pcxnt. Signifies exclamation mark. ^ Signifies caret. ^ Signifies superior

character.

/^ Signifies inferior character. p/l Inck)se in brackets.

W^ Inckise in parentheses. ^ Use characteі(^) m. Make a new paragraph. /IfJ ^ Not a paragraph; run Ta. 0^ —*«4, eMM, Words are omitted from, or in^py (ToKy Query to author. Add explanation.

Digitized by VjOOQ iC

Another particularly important mark is "... ." or " stet." Stet is derived from the Latin, and means "let it stand"; that is, do not remove the part marked out. Authors frequently mark out passages from their manuscripts by drawing lines through them. If they decide later to retain the passages thus marked out, they do not attempt to erase the marks, but simply mark the passage "stet." Proofreaders also use this mark when they have inadvertently marked out the wrong word.

The comma and the apostrophe should be differently designated on proof, for, if no distinction is made, an error may result. A mark over a conuna signifies that a comma is intended; if the mark is beneath, it signifies an apostrophe.

As other rules of good practice, attention is called to the following:

Always make a hyphen with a double stroke, thus, «, so that every slip of the pencil will not be mistaken for a hyphen.

Always use a caret (A) when anything is to be inserted in a line, and always make the mark at the bottom of the line.

A line drawn through a capital letter in copy means that it is to be set in lower-case.

A ring drawn around a contraction, an abbreviation, or an ampersand (&) means "spell it out."

When marking a proof put all the errors that are to the left of the center in the left-hand margin and all to the right of the center in the right-hand margin. Place them directly opposite the line in which they occur and in the order in which they occur. To be sure of having room for this purpose, the first error on the left of the line should be placed some little distance from the text, the first one on the right should be close to the text. Do not draw lines from the errors to the corrections, for that would entail a useless waste of time in tracing the corrections, and there is likelihood of error if the lines cross or touch each other. Moreover, such lines mar the appearance of the proof.

Digitized by VjOOQiC

Views and Practices Regarding; j^.A-'^ Apprentices "^^oJt^^

O^/Au a f % No. 4—By WILLIAM H. SEED ^1

^>r/^/CrtX .i i/^ p,^^^ fy^ Inland PrInterH fof April, 1916

^. C- **Bwj are~a nuisance," were his first words, and it was perfectly clear that the remarks apply here which I have made about other offices where no, aca^mic training is re-^^^Ut^ ,ceived by the apprentices.' 9 •• • • • . ••••

"How would you regard a proposal," I said, "to send \[/ boysjlo school half a day in order to have them instructed ^ in those subjects which would be calculated to give them « i more interest in;their work/ I mean such subjects as ^ ^

grammar and composition, arithmetic, with special reference ^ to casting'up*and sopn, designing^the history and theory of ^ printing, and*80 forth."; ^

"Would'the courses be arranged so that some boys could ^--> attend in*the*morning and some in the afternoon, so as not JtAC to leave the'oljlce without boys?" he asked.v J^have al-C ^^ ways noticed^that foremen do not want to be short of boys, ^

much as they'proclaim them to be a nuisanc^' O/

J^lQ "I suposeso,". I replied^^he foreman ppndered for a few <fi II moments*over what was evidentlyra^he^idea to him, and at length he*said, "I think it would be an excellent idea." O yf^^ key tojhis sudden conversionftoJanMdea which I ex-,

'pected him'to^oppose was clearly to be seen;-) It would make' y the boys interested in their work/ ""^at was

everything to J / X him, and it is^^aluable, point to oe kept in mind by the U ^i XAJrf. /dvocates^of academic^training forrapprentices. Put the Jnfid^ ^ 'idea forward without explanation and you arouse a storm of /X. opposition, or at/ffie^Kl ^asj /with indifference ;i but make it . clear that you are really going to make better boys, because if' they wiiybe more interested^in^their work, and thcy^bow- vy

wows" are changed to "hear-hears." One might think it sufficiently'clear that thislis^ the object ^ of ^allisljggested A^>Hf ^cademic training for printers,* but it is not clear: to those ^i/V. /Merely to make the trade more exclusive; to." do somethi ng fl ^j NOyho have not thought of it. You are supposed to desire q^" for^^l«<rbpys" out of pure philantropy, as one might clothe J^ ' pxi were it necessary, o^ as one might give .them ; out of pure good nature.,

Digitized by VjOOQiC

VIEWS AND PRACTICES REGARDING APPRENTICES

No. 4—By WILUAM H. SEED

From The Inland Printer for April, 1916

" Boys are a nuisance,'* were his first words, and it was perfectly clear that the remarks apply here which I have

made about other offices where no academic training is received by the apprentices.

"How would you regard a proposal," I said, "to send boys to school half a day in order to have them instructed in those subjects which would be calculated to give them more interest in their work ? I mean such subjects as grammar and composition, arithmetic, with special reference to casting up and so on, designing, the history and theory of printing, and so forth."

"Would the courses be arranged so that some boys could attend in the morning and some in the afternoon, so as not to leave the office without boys?" he asked. (I have always noticed that foremen do not want to be short of boys, much as they proclaim them to be a nuisance.)

"I suppose so," I replied.

The foreman pondered for a few moments over what was evidently a new idea to him, and at length he said, "I think it would be an excellent idea."

The key to his sudden conversion to an idea which I expected him to oppose was clearly to be seen. It would make the boys interested in their work! That was everything to him, and it is a valuable point to be kept in mind by the advocates of academic training for apprentices. Put the idea forward without explanation and you arouse a storm of

opposition, or at least meet with indifference; but make it clear that you are really going to make better boys, because they will be more interested in their work, and the "bowwows" are changed to "hear-hears." One might think it sufficiently clear that this is the object of all suggested academic training for printers, but it is not clear to those who have not thought of it. You are supposed to desire merely to make the trade more exclusive; to "do something for the boys" out of pure philanthropy, as one might clothe and feed them were it necessary, or as one might give them bean feists out of pure good nature.

Digitized by VjOOQiC

51. Order of Procedure in Proofreading.— As a first step in reading a proof, it is advisable to line up the paragraphs. To do this draw a faint pencil-line down the proof, using the first lines of the paragraphs as a guide. Any inequality of indention will be detected at once. Next go down the ends of all the lines and verify the divisions of words; that is, make sure that they have been properly divided and that the remainder of each word is at the beginning of the next Une. See that all headings and subheads (also running titles, folios, and signatures of paged proofs) are correct. See that the numberings of chapters, sections, etc., are consistent and consecutive. Glance over the proof to see if any glaring errors are noticeable. These things having been disposed of, the mind is free for concentration on the text. Read and analyze each statement made by the author. Endeavor to

grasp his full meaning. K he or the compositor has failed to put in the necessary marks of punctuation, it is the proofreader's duty to do so. This is where the compositor has a chance to show his knowledge and skill. If the compositor understands punctuation he will have inserted the proper marks. True, the proofreader may not agree with him, and some may be altered or removed.

Now that the bulk of straight matter is set on machines, employers find it to their advantage to have copy revised by the proofreader before setting. This obviates resetting matter for corrections.

52. Punctuation. —The question of punctuation is one on which there is great diversity of opinion. Some authors and proofreaders cut their sentences up into short, jerky clauses; others omit all points so long as the words are logically cpn-nected. The author prefers the latter practice, and would here call attention to the increasing extent to which it is becoming established. Just as a clear, flowing stream is the most refreshing from which to drink, so is clear, flowing language the most refreshing to the mind, whether it be written or spoken.

Proofreaders should be very careful not to alter an author's style of writing. Any sentence that gives the reader a correct

Digitized by VjOOQiC

conception of the author's meaning may be said to be properly punctuated. Words which do not give the correct sense when read are either wrongly used or improperly punctuated, and some change should be made. Usually, it is not the proofreader's privilege to alter copy; it is his duty, however, to call attention to anything that may seem to him to be wrong. Such a notation on a proof is called a query.

53. Marks of Punctuation. —^The following are the usual marks of punctuation: the comma (,) the dash (—), the semicolon (;), the colon (:), the period or full-point (.), the hyphen (-), the apostrophe ('), the interrogation mark (?), the exclamation mark (!), brackets [ ], and parentheses ().

54. Use of the Comma (,).—^The Century Dictionary states that the comma is "used to indicate the smallest interruption in continuity of thought or granmiatical construction, the marking of which contributes to clearness." The following examples show some uses of the comma:

1. Before a conjunction introducing an antithetical clause.

Any man can be a printer merely by calling himself one, and there is no one who would dare challenge his assertion.

2. After a participial clause, especially if it explains the main clause.

Being out of " sorts," we were unable to finish the job.

Figuratively speaking, this man combines two or more individuals working in harmony.

3. Wl>en the conjunction is omitted between words, phrases, or clauses.

That job is fearfully, wonderfully put together.

4. After a word or clause independently beginning a sen-jbence.

Fortunately, some boys who start out to become printers soon realize their mistake.

Shorn of all its verbiage, efl&ciency is nothing more than getting a thing done with che least possible friction in the least possible time.

Digitized by VjOOQiC

5. After each of a series of words or clauses, and when words are used in pairs.

Third, the ordinary routine of business and society has developed a myriad of forms, such as the letterhead and wedding announcement, the street-car transfer and laundry-list, the blank form, the time-table, and the telephone directory.

6. To separate proper nouns belonging to different

individuals or places.

To George, Henry seemed a mystery.

To America, Europe looks for peace proi>osal8.

7. After a vocative expression. Mr. President, I feel highly honored, etc.

8. Between two independent clauses joined with a con-•unction.

Many of us are prone to give advice as to what not to do, and yet wc fail to offer a constructive idea of what should be done.

9. After adjectives where two or more coming together qualify the same noun, but not between the last adjective and the noun.

The question of tone values is entirely in the hands of the photoengrav^r, who can give you a strong, solid impression, or a gray, weak, uninteresting picture.

10. When an adjective qualifies the succeeding adjective do not use the comma.

For best results use a strong bright red. He is a weak old man.

11. Restrictive clauses do not take the comma, because the statement is restricted to that particular subject. There is great difference of meaning between the following statements:

* The color, which is complementary, should be preferred. The color which is complementary should be preferred.

Digitized by VjOOQiC

12. Always use a comma before the conjunction that joins the last of a series of nouns, adjectives, or participles to the preceding ones.

Meanwhile, in addition to Gutenberg's single process, two others have developed, giving us three fundamental processes: typography (relief), intaglio (incised), and lithography (plane), besides die-stamping and embossing.

Tom, Dick, and Harry have gone to school.

If we omit the comma after Dick, the sentence reads as if we are telling Tom that Dick and Harry^have gone to school.

Here is a sentence that recently appeared in print:

I think it is high time we realized that there are other occupations for the blind besides making brooms, caning chairs, weaving and tuning pianos.

Of course, the idea of weaving a piano is so ridiculous that the meaning cannot be misconstrued, but the sentence is very apt to be misread.

Here is another: "Seashore chairs, invalids' chairs and go-carts." Of course, it does not mean invalids' go-carts, even though it says so. A comma after "chairs" would have avoided all likelihood of mistake.

Many educators persist in teaching the omission of the conmia before the conjunction, contending that the conjunction takes the place of the comma. The function of a comma is to separate words or phrases, while that of the conjunction is to join them together. It is obvious that the conjunction cannot fulfill this dual role. If those who advocate the omission of the comma were to spend a year or two at the proof-desk and had occasion to note how frequently the sense of an article may be misconstrued when the comma is omitted, the author is confident that they wovdd insist on its use. When it is used there is never any doubt as to the meaning of the sentence; if omitted, the sentence is sometimes ambiguous.

A department-store advertising manager who always insisted on the omission of the comma frequently went into print with

Digitized by VjOOQiC

monstrosities in his endeavors to make his meaning clear. At

one time he was giving a list of the color combinations that were to be had in handkerchiefs. He stated that they were in "combinations of black-and-white, blue-and-white and pink-and-white." Owinr; to the fact that he omitted the comma before the last group in the series, he resorted to the use of the hyphens. Had he used the conrnia, the hyphens would not have been necessary.

Of course, this was not so bad. His meaning was clear. But one day he ran into a new combination of colors, and this was the result: "We have them in black-and-white, blue-and-white, pink-and-white and navy blue-and-nile green-and-white."

Another noteworthy shortcoming of this particular man was that he usually knew when to join two words together as a compound adjective, but he did not know that at other times they could be used as separate words. Consequently, he had gotten into the habit of using certain combinations of words always in the compound form.

55. The Dash (—).—A dash indicates a pause slightly longer than that called for by a comma. Its various uses are covered in the following:

1. To indicate a sudden change in thought.

If his judgment is in error—well, " there*s no money in the printing business, anyway! "

2. To denote faltering speech.

I—ah—well—no; I don't think so.

3. To point off a parenthetical clause.

The plate is perishable—sensitive to atmospheric conditions—but the cost of making it is not great.

4. To separate an explanatory word or clause from the original statement.

From the time that printing was invented there has been a decline of the printer's regard for that for which printing was desired—lan|:uage.

Digitized by VjOOQiC

PROOFREADING $5

5. Between a sidehead and the text, and after the word "Note" in a footnote.

(See general use throughout this book.) Note. —Use a dash after the word " Note."

6. Before the words "Continued" and "Concluded."

" How We Got Our Alphabet."—Continued. " Printing as a Fine Art."—Concluded.

7. To repeat by way of emphasis.

Your catalogue takes the place of your salesman—^your catalogue if your salesman.

8. Before a credit at the end of a quoted article.

" Here we are face to face with a new and difficult problem —^new and difficult, that is, in the sense that . . . "— Manual of StylCy University 0} Chicago Press.

9. Writers who are not confident of the proper marks of punctuation make frequent use of the dash. Advertisers sometimes use the dash to string together a series of disjointed, forceful phrases that are logically but not syntactically connected.

10. Do not use a dash after a formal address to a letter; a colon is the proper mark. (See under "Colon.") The frequency with which stenographers use both the colon and the dash leads one to suppose that such is the practice taught in business colleges.

11. Besides the one-em dash, whose uses have been exemplified, en dashes and two-em dashes are also used.

Use an en dash to stand for "to" in words or numbers. January-March, 1917. Pages 39-48. Winter of 1915-16.

A compourid word set in capitals should have an en dash

instead of a hyphen.

THE ADLER-JONES CONTROVERSY. Use a two-em dash to show omission of part of a name. Mrs. K will soon return.

Digitized by VjOOQIC

56. The Semicolon (;).—^The pause indicated by a semicolon is slightly longer than that after a comma or a dash. The semicolon finds its use mostly in complex sentences.

1. When a sentence opens with an introductory clause, the succeeding clauses should be separated with semicolons, especially if the latter contain commas.

The following are the officers for the ensuing year: Wilbur Smith, President, of Philadelphia, Pa.; Theodore Mabie, Vice-President, of Newark, N. J.; Harold Parseval, Secretary-Treasurer, of Blissville, N. Y.

2. When successive clauses of a compound sentence are not joined by conjunctions, use the semicolon.

Standing matter is job insurance; it is the cure for that great evil, the transient customer; it is the printer's best argument for repeat orders.

3. In Scripture references, to separate passages containing chapters.

Gen. 4:6-13, IS, 19; 5:18.

4. The semicolon should be placed outside of the quotation marks, unless a part of the quotation.

" If a task is once begun, never leave it till it's done "; writes Phoebe Carey.

57. The Colon (:).—The colon denotes a longer pause than that after a semicolon. Its uses are illustrated below.

1. After the salutation of a letter.

William F. Smith & Co., Gentlemen:

We are in receipt of your letter of the eighth instant, etc.

My dear Mr. Wilson:

2. On title-pages, where the location precedes the name of the publisher in the same line.

New York: John Wiley & Sons, Inc.

Digitized by VjOOQiC \

3. After the introductory clause of a complex sentence.

Edward L. Thomdike, of Teachers College, Columbia University, says. " To the five-year-old a page of print is an indefinite smear of black specks on a white ground; to his teacher it is a definite series of letters and words; to the printer it is not only that, but also ten-point type."

4. Between minutes and seconds in time designations, and between chapter and verse in Scripture passages.

He is in the 2 : 16 class. (See " Period " for time-tables, etc.) St. John 10:13-15; 12:9-16.

If a colon and the closing marks of a quotation should come together, place the colon inside of the quotation marks if it is a p)art of the quotation; if it is part of the sentence in which the quotation occurs, place it outside of the quotation marks.

58. The Period (.).—The period denotes a full pause, and is used at the end of every sentence unless the sentence be in the form of an exclamation or an interrogation. Other uses of the period are:

1. To denote an abbreviation or a contraction. A contraction is sometimes denoted by the use of an apostrophe. (See Apostrophe.) Never use both marks at the same time.

Dr. (Doctor); Wm. (William); Pa. (Pennsylvania); Co. (Company); Inc. (Incorporated).

2. After Roman numerals and Arabic figures when used in

indexes or in the nimibering of paragraphs throughout the text, but not if standing alone.

See numbered paragraphs throughout this book.

I. Composition 13

n. Presswork 49

m. Color work 123

LESSON XIV

Digitized by VjOOQiC

S8 PRINTING

3. To separate dollars from cents.

$1.79 $17-25 $975-6o

4. In time-tables to separate hours from minutes.

9.12 AM, 1349 f. M.

(In time-tables p. m. hours are usually designated in heavier type.)

5. To indicate that what follows the point is expressed decimally.

3.1416 .7854 .5%

6. Names which have been shortened and which are used as nicknames do not take the period.

Sam, Ben, Rob, Will, Fred, Phil, etc.

7. To show an omission of words in an extract, use three or four periods with en quads between them.

Some one has held that " Typography .... ought to be like a sheet of flawless crystal, so clear that you can gaze through it without ever being conscious that it is there; . . . . "

59. The Hyphen (-).—^The use of the hyphen is illustrated below.

1. In dictionaries, to separate words into syllables.

in-com-pat-i-ble rev-o-lu-tion

2. To show that the word at the end of the line has been divided.

(See the various divisions throughout the text.)

3. To show that two or more words are to be joined together and used as a single term.

So-called printer. Three-year-old child. Modem printing-

presses.

(See also under "Compound Words.")

Digitized by VjOOQiC

60. The Apostrophe (').—The apostrophe was primarily used to indicate the omission of one or more letters from a word. It is no longer restricted to such use, but is now employed for other purposes.

1. To denote the omission of letters.

I'U, for / iviU, Don*t, for do not It's, for it is.

2. To denote possessive case.

William's hat Adams's bakery.

3. To indicate the plural of figures or letters.

He had ten 3's and twelve A's.

4. To denote a contraction.

Dep't, for departmefU. Sec'y, for secretary'^

61. Quotation Marks (" ").—^The usual method of quoting is to use two inverted commas at the beginning of a citation and two apostrophes at the end. Some latter-day fonts, of which

Bodoni is a t}^, have a character specially cast for the opening mark of quotation. (See page 60.)

When one quotation includes another, the second one should have single marks instead of double. If still a third occurs, this should be double.

When a copied article consists of more than one paragraph, the closing quotation mark should be placed at the end of the last paragraph only. The opening quotation mark, however, should be used at the beginning of each quoted paragraph to show that it is a continuation of the citation. Do not close the quotation at the end of each paragraph.

Periods and commas always go inside of the quotation marks; the other marks of punctuation go inside if the mark3 are a

L^.gitized by VjOOQiC

part of the quotation, outside if they are used as punctuation of the sentence.

1. To show the exact words used by an author.

It is high time that a printer should he able to see more than **a definite series of letters and words."

(This paragraph is set in Bodoni to show the special quotation marks.)

2. Double and single quotations.

Everett R. Currier, in speaking of Will Bradley and his influence on modem typography, has this to say: " His revival of the forgotten practice of letter-spacing has proved a wasteful and pernicious innovation—wasteful on account of the time consumed in inserting space between letters (where it is not needed), pernicious because it gave * art' compositors a new plaything, and only served to enlarge the hole through which, as emplo)dng printers unanimously agreed, the profits from the other departments leaked."

3. Names of books, magazines, poems, and works of art, also the titles of papers, articles, etc.

Have you read Cress's " Art and Practice of T)rpography" ?

He read an interesting paper on " Present-day Tendencies in Typography."

4. To designate unusual, technical, or ironical words or phrases.

If the layout of the job doesn't look " right"—why doesn't it ?

When printing one ink over another we sometimes have trouble because the second ink refuses to " take " over the first.

Gutenberg would have been more than human to have

foreseen the evolution of his little " cider-press " into the gigantic rotary of the twentieth century.

62. Interrogation Mark (?).—^The interrogation mark is said to be a corruption of the first and last letters of the Latin word QtuBsHo, a question, placed one above the other; thus, ?.

Digitized by VjOOQIC

1. It is used in asking a direct question.

But why is this a pleasing division ? Why not some other distribution of space ?

How much of this wasted time do you think is charged imder the head of " distribution " ?

2. After each question in a compound sentence.

How much would it make if set in eight-point type ? in nine-point ? in ten-point?

3. As a query, expressing doubt.

Gutenberg invented printing from movable t3rpcs at Mentz (?) about 1440.

63. Exclamation Mark (!). This mark probably owes its origin to the Latin word lo, joy, one letter being written over

the other; as q.

1. It is used to denote surprise, emotion, or an outcry.

Oh! How you startled me! "Help! help!" he cried. Ah, what a tangled web we weave! O that I had the wings of an eagle!

2. After interjections, used independently or in sentences.

Oh! Ah! Ouch! Before the live and the strong flies an angel, crying, "On! On I"

3. After an invocation or command.

Speed our republic, O Father on high!

Still, O my Country, while we may, look back I

Halt! Who goes there ?

"'Forward, the Light Brigade! Charge for the guns!' he said:"

Digitized by VjOOQiC

64. Parentheses ( ).—When an author wishes to offer an explanation of something which has been said but which is not an essential part of the text, the words are enclosed in parentheses.

The Romans wrote with an iron pen or stylus (wherxe cur

word style) on waxen surfaces smoothed over wood.

The lower-case letters, or minuscules (this word, like majuscules, is accented on the second syllable), and the script we use now demand attention.

65. Brackets [ ].—^When one parenthesis occurs inside of another, brackets are used to designate the inner one. This frequently occurs in legal citations, but, inasmuch as nearly every office has its own style, no examples will be given.

1. Matter that is introduced into the text by some one other than the writer should be enclosed with brackets.

As an example of the misuse of the term complementary, I quote from an otherwise excellent article on the use of color on cover stocks: "As the lowering of all colors results in black, and the lightening of all colors results in white, then black and white are the two friendly mediums for purposes of separation [so far, so good; but he adds], as they are complementary [sic] to all colors."

It will be observed that the h)rphen [meaning the h)rphen in compounds] is less frequently used than in former editions.

2. In reports of speeches, to enclose words explanatory of the emotions of the audience.

While woman may never be elected to Congress, she will continue to be the "speaker of the house." [Laughter.]

3. For folios and to enclose lines designating where articles are continued on or from.

[32I

[Continued on page 132]

[Continued from page 76]

[To be continued]

Digitized by VjOOQiC

66. Division of Words. —^There is great diversity of opinion among authors and proofreaders regarding the division of words. Some follow the American plan of dividing according to pronunciation, some the EngUsh plan of dividing according to derivation. It is a matter of extreme regret that grammarians have not agreed on some definite plan, so that the ordinary layman might feel assured that he is following good usage.

In oflFering the following rules the author is well aware that the matter is but briefly covered. When in doubt, consult a good dictionary.

1. Words should be divided according to syllables; a syllable being a succession of letters to represent one sound.

con-ster-na-tion syl-lab-i-ca-tion

2. If the word is one containing a single-vowel syllable preceding the last syllable, divide the word preferably on the vowel, carrying over the last syllable. If it has two vowels, retain both.

mechani-cal, not mechan-ical. approxi-mate, not approx-imate. di£ferentia-tion, not differenti-ation.

3. If the last syllable of a word contains but two letters, do not carry it to the next line. If there is room for the hyphen there is usually room for the last two letters.

vocifer-ously, not vociferous-ly.

4. In dividing present participles the ing should be carried over. If the consonant is doubled on adding the suffix, carry over the second consonant.

smok-ing din-ing dnim-ming

drink-ing sit-ting swim-ming

express-ing (here the consonant has not been doubled; it is part of the original word).

Digitized by VjOOQiC

5. Divide a compound word into its elemental words rather

than on syllables, unless spacing would be sacrificed to accomplish it.

composing-room, not compos-ing-room.

6. Words which have been compounded of two words, and which, from usage, have coalesced into one, should preferably be divided into their original elements.

school-master is better than schoolmas-ter. semi-annual is better than semian-nual. under-estimate is better than underes-timate.

7. Able and ible are always to be considered as the final syllable, and carried over.

consider-able indestnict-ible

8. Words of one syllable cannot be divided, nor can the plurals of singular nouns even though pronounced as if they were words of two syllables.

horse, horses inch, inches fox, foxes

9. The addition of the past tense to verbs of one syllable does not add a syllable. Such words cannot be divided.

drown, drowned slap, slapped push, pushed

10. No English word ever begins with an x or ends with a j;

therefore, in dividing words containing these letters always keep the X on the upper line and j on the lower.

parox-ysm pre-judice

The word prejudice is an exception to the rule of dividing according to pronunciation. The accent is on the prej. The word is from the Latin pre jtdice, to judge in advance, and is used in this form in all legal documents.

Digitized by VjOOQiC

11. If the first syllable of a word contains but one letter, do not divide it on the first syllable; carry over the letter.

E-gypt a-mong a-float a-shore

12. When there is a distinction made in the pronunciation of a word to denote its part of speech, the word should be divided according to pronunciation.

pro-gress (v.) prog-ress (n.)

pro-duce (v.) prod-uce (n.)

13. Never have more than two divisions of words at the ends of contiguous lines.

67. Compound Words. —^A compound word is one that is composed of two or more words joined together to express a

single idea. The word indicating the idea may be a noun, as in naming a thing, or an adjective, describing the thing named. Sometimes the words are joined together as one word with a h)^hen, sometimes without. Just when to use the hyphen and when not is one of the baffling questions for both compositor and proofreader.

Much has been written on this subject, but there is no unanimity of opinion, even among experts. The most comprehensive article that the author has read is embodied in the Standard Dictionary, and is printed on pages 30 and 31 (edition of 1913). It is from the pen of F. Horace Teall, who has also written a book entitled "The Compounding of English Words."

While rules may vary slightly in printing offices, the following may be said to prevail.

I. When joining two nouns together to name an object, and the idea expressed by the object is in the nature of a container, use the hyphen.

hat-box paper-box (a box to hold papers)

piU-box oil-can

Digitized by VjOOQiC

2. When two words are arbitrarily joined together to name an object, they no longer stand in their original relation. Such nouns do not take the hyphen.

3. When joining a participle to a noun to make a new noun, use the hyphen.

sitting-room printing-press

smoking-room sewing-machine

gambling-house boiling-point

4. When two words are joined together to form an adjective preceding a noun, use the hyphen.

still-life studies so-called magician

high-grade goods above-named rules

week-old baby much-used phrase

5. Adverbs that qualify adjectives preceding nouns do not take the hyphen. They do not become part of the adjective, but retain their use as adverbs.

richly dressed woman newly married couple

freshly picked bouquet highly prized book

6. Usually (but not invariably), compound nouns are written without the h)^hen if either of the words contains but one syllable, with the hyphen if it contains two, as separate words if it contains three or more.

inkman

sawmill

notebook

icehouse

pressroom

ink-maker

powder-mill

pocket-book

power-house

composing-room

ink manufacturer chocolate mill reference book business house recitation room

7. The present-day tendency is to omit the hyphen in today tonight tomorrow

Digitized by VjOOQiC

8. Vice, ex, elect, and general, when part of a title, should be joined to the chief noun with a hyphen.

Vice-President Marshall the President-elect

ex-President Roosevelt the postmaster-general

9. It frequently happens that after words have been in use for some time, and we have become fairly familiar with their construction, they change in form, the hyphen finally being dropped.

bookkeeper proofreader earmark

newspaper bloodshed muskmelon

keyboard saleslady shipmate

typewriter whalebone yardstick

10. Latin and Greek prepositions prefixed to a word do not usually take the h)^hen.

antedate international postscript

antisepdc subcutaneous superfine

11. When two or more compound words have one part in

common, that part is omitted from all but the last word, the omission in each case being designated by a hyphen.

The boxes were full of one-, two-, and three-em quads. Those tools are used by gold- and silversmiths.

68. Capitalization. —^While there are some slight differences of opinion among proofreaders regarding capitalization, the following rules may be considered as meeting the requirements of the average office.

1. Every sentence should begin with a capital.

(See sentences throughout this book.)

2. Every line of poetry should begin with a capital.

Yes, words may sound alike, yet have

Dissimilar meanings, maybe: How different is a weak old man

From just a week-old baby I

Digitized by VjOOQiC

3. All proper nouns and most adjectives derived from proper nouns should begin with a capital.

America American

England English

France French

4. Verbs derived from proper nouns should begin with a lower-case letter.

americanized fletcherized

boycott macadamized

5. Nouns or pronouns that designate any member of the Christian Trinity should be capitalized.

Providence (the Deity) Him (God or Christ)

Holy Ghost

Sun of Righteousness

6. Capitalize the names of states, counties, cities, streets,

and parks.

Pennsylvania New York Wilkes-Barre

Second Street Fairmount Park Trenton

Zoological Gardens Central Park Monroe County

7. Capitalize the names of churches, organizations, clubs, societies, and buildings.

First Baptist Church Daughters of the Revolution
Philobiblion Club Board of Public Education Union League

Pennsylvania Railroad

Woolworth Building

Hotel Metropole

Girard College

Philadelphia Rapid Transit Co.

8. Capitalize all geographical names and divisions.

Digitized by VjOOQiC

9. Capitalize the various epochs, important events, holidays, treaties, acts, and bills.

Middle Ages Declaration of Independence . Hay Treaty

Renaissance Fifteenth Amendment Stamp Act

Revolution the Civil War Magna Charta

Memorial Day Thanksgiving Day Fourth of July

10. Capitalize titles and academic degrees.

President Wilson Prince of Wales

the President (of the U. S.) Joseph Smith, D.D., LL.D.

Rear-Admiral Dewey Philip Guernsey, M.D., Ph.D.

11. Capitalize the word "city'* only when part of the corporate, title.

Twin City Jersey City

I shall sue the City of Philadelphia.

The city of Philadelphia covers an area of 132.7 square miles.

12. Capitalize the titles of books, papers, magazines, articles, etc.

The Inland Printer The American Printer

The House of the Seven Gables.

The Graphic Arts and Crafts Year-Book.

Photogravures and Their Value to the Commercial World.

Printing Instruction in the Public Schools.

13. Capitalize the seasons only when they are personified.

The poet speaks of Winter, with his icy blasts. Then comes Summer, clad in her garb of green. We have had a severe winter. I met him last simmier.

14. Always capitalize the pronoun "I" and the interjection

69. Printing-office Style. —The journeyman printer who migrates from one office to another soon learns that there is no \iniform style existing in all offices. In offering the following

Digitized by VjOOQiC

list the author feels that he is presenting the usage of the best printing houses.

Omit periods from headings and' at the ends of display lines, unless denoting an abbreviation.

Do not use periods after Roman munerals. They are not abbreviations.

The abbreviation lb. for pounds comes from the Latin librae the plural of which is librce. Therefore, lb. should stand as the proper abbreviation for both singular and plural.

Do not use spaces between initials in abbreviated titles. M.D., Ph.D., A.B., LL.D.

Never use the word "river" in names containing the word Rio; Rio means river. Rio Grande, not Rio Grande River.

Never use the word "mountains" in words containing the word Sierra; Sierra means a saw-like range of mountains. Sierra Nevada, not Sierra Nevada Mountains.

The word Savioury meaning Jesus Christ, should be spelled with a "u"; if it has any other meaning, make it lower-case and do not use the "u."

All singular nouns in the possessive case take the apostrophe and s: Jones's wagon. Smith's store. All plural nouns ending in s take the apostrophe after the s: boys' clothing, girls' shoes. If the plural is not made by adding s, but by changing the form, then add the apostrophe and s: men's hats, children's toys. If the singular possessive ends in s, and the succeeding word begins with s, or where there is a succession of s sounds, then the possessive does not take the s: for conscience' sake, for Jesus' sake, for goodness' sake.

Never allow a succession of the same word at the end of more than two lines. If a series of small words occurs at the ends of successive lines, and gives the effect of the words standing apart from the text, break up this succession by driving over an occasional word. In some offices the rule is

to prevent more than two punctuation marks of any kind from coming in succession. If much time and labor would be entailed in preventing thisy it is better to save the time and pass the market

Digitized by VjOOQiC

A.M. and P. M. look best when set in small capitals. If there are no small capitals to the font, put them in capitals if the line is capitalized, in lower-case if the line is in lower-case. If the abbreviations are in capitals do not use a space between the A. and the M., but use a thin space between the P. and the M. This latter is to keep the period closer to the P than to the M. If the abbreviations are in lower-case, leave out the space.

Per cent, the contraction for the Latin per centum, is now a fully anglicized term. The modem tendency is to leave off the period. Another decade may witness the full coalescence of the two words, for the beginning is already in evidence. Percent is just as good a word as percentage, and is frequently found in print.

The short "and," or ampersand, had its origin in the old Latin manuscripts. The Latin for "and" is et, an early form being written &t. By a process of evolution, the early scribes developed it into the ligature Eif. To-day we have many beautiful forms of this character, but they are only suited to job composition, and should not be used in ordinary book

work. The ampersand should be used only in firm names, as Straw-bridge & Clothier, Wanamaker & Brown.

It is the rule in many offices to spell out all numbers under one hundred, and put in figures all over one hundred. If the text is full of numbers it is better to put them all in figures.

Amounts of five or more figures take the comma: 12,622, 272,976. Amoimts of four figures do not take the comma, unless in column formation, when the comma should be used to keep them uniform with amounts of five figures.

When using a dollar mark at the head of a column of amounts place the mark alongside of the figure on the first line in the dollar column. If there is no figure in the dollar colimrn, use a cipher. When the column has been totaled, add the dollar mark to the total amount. Do not use the mark on each line.

While rules for indenting paragraphs may differ in printing offices, it is conceded that indenting according to the following will produce a pleasing appearance; for measures up to and

Digitized by VjOOQiC

including eighteen ems of pica, indent one em of the body in which the type is set; for nineteen to twenty-four ems pica, one and a half ems of the body; from twenty-five to thirty ems pica, two ems of the body. This applies to sizes from

eight- to twelve-point. Larger sizes take less space, smaller sizes take more.

Indent poetry according to rhyme. If a few short lines occur, they should hang in about three ems.

My country! 'tis of thee, Sweet land of liberty,

Of thee I sing! Land where my fathers died! Land of the pilgrims' pridel From every mountain side

Let freedom ring!

BIBLIOGRAPHY

Punctuation, by F. Horace Teall.

The Compounding of English Words, by F. Horace TealL

Correct Composition, by Theodore L. De Vinne.

Proofreading and Punctuation, by A. M. Smith.

Manual of Style, The University of Chicago Press.

Article on compounding of words, Standard Dictionary (1913 ed.),

DD. XXX. XXXL

Digitized by VjOOQiC

CHAPTER VI TYPE FACES

70. General Classification. —Before proceeding to a study of job composition, it is very essential that the student learn something of the general characteristics of job faces. The first impression that one receives when set adrift in a large printing office is that he will never be able to differentiate the various type faces. The task is really not such a difficult one, after all. As a matter of fact, every type face comes under one of five general headings—text, gothic, roman, italic, or script.

71. Text. —^At the time of the invention of printing from movable t)^es, the first letters cast were imitations of the hand-lettering then prevalent in the monasteries. This style of type is now known as texl or black-letter. Most authorities agree that it really should be called gothiCy doubtless owing to its

This is

24#otnt Cloister &htk

possessing those pointed characteristics so prevalent in Gothic architecture. The same authorities also contend that the type face known as gothic should be called block letter. It is called "sans-serif" by some English founders.

The term black-letter is derived from the fact that when the letter is printed in mass formation, the whole tone is black. The early manuscripts were not set off in paragraphs, but the break in thought was designated by an ornament. There were no break-lines throughout the text.

As the text letter has come to us from ecclesiastical sources, it seems to be the most logical letter to use for such purposes,

72. Gothic. —Our present-day gothic bears a very strong resemblance to the letter used by the ancient Romans on their stamps and coins. Such letters are devoid of serifs.

This is

12-PT. LINING GOTHIC No. 45

73. Roman. —^The Roman alphabet was evolved from the Phoenician and Greek alphabets, and originally consisted of capital letters only. The small or lower-case letters are corruptions of the capitals, and came into use during the eighth century.

The Roman style of lettering was used by the Latin scribes in preparing manuscripts, and by the stone-cutters for inscriptions on buildings and tablets. It is much used in present-day architecture, and the V, the old form of the capital U, is still in evidence.

This IS

2 2-Point Old-Style

This is

24-Pl Bodoni

The first successful roman type face was cut by Nicolas Jenson, at Venice, in 1471. This has served as a model for later productions. Books printed by Jenson in 1470 do not contain the letters J, U, and W, these characters being added to the alphabet several years later. Where the force of w was required, two v*s were set side by side. This does not often occur in Latin. The old form of the cap U was V, and from this was derived the double U, or W.

Digitized by VjOOQiC

The fact that the letters J and U are not alphabetically arranged in our cap cases would seem to signify that the cap case has undergone no change in arrangement since the days of Jenson. Also that the W was added before the J and U.

74. Italic. —^The slanting or italic letter (so named in honor of Italy) was introduced by Aldus Manutius. It was patterned after the handwriting of Petrarch, an Italian poet.

When italic type was first made there were no capitals to the fonts, so roman capitals were used with italic lower-case.

This is

U'Point Old'Style Italic

75. Script. —Script types also owe their origin to imitations of handwriting. This style of letter is restricted to printing that is of a social nature.

This is

76. Old-style. —^Roman type faces are subdivided into old-style and modern. Old-style faces were in vogue from 1469 until 1783, their strong, bold, rugged characteristics being especially adapted to the rough, hand-made papers then in use. They were displaced in public favor for awhile, but have gradually come back. At the present time they are again in demand, and the major portion of our most artistic productions are in this face of type.

Not only are old-style faces in favor among typographers, but artists in hand-lettering are producing many beautiful examples to grace our typographical journals. Frederic W. Goudy, of New York, has designed many noteworthy faces, and quite a few of them have been cast in t)^e. Mr. Goudy has made a special study of the old masters.

Digitized by VjOOQiC

SENATUS' POPULUSaUE' ROMANUS ' DIVO ' TTTO' DIVI' VESPASIANI' F' VES-

18 POINT FORUM TITLE [pATENTEd]

WHEN THE DECLARATION

of Independence w^as under consideration by Congress, there were two

18 POINT NO 2. KENNERLEY

FOURSCORE &^ SEVEKi Years ago our fathers brought forth on this continent a new nation, conceived in

18 POINT NO. 2 KENNERLEY ITALIC '

Type Faces Designed by Frederic W. Goudy.

Where maximum of legibility is required, old-style faces will be found superior to modern. This is due to the fact that the minor elements (hair-lines, so called), are heavier in the old-style design.

The chief difference in modern and old-style (or "old-face," as it is commonly called in England) lies in the matter of proportion, both being substantially the same in form. In old-style there is greater variety in the widths of individual letters, the thickening of the curves in the round letters not being in the center of the curves as in the modern, but above and below the center according as it occurs on the right or left. These curves are not geometrical, but carefully

considered quantities, giving a character to the letters which no mechanical cpn^ti^uc-tipn can possibly impart.

Digitized by VjOOQ iC

77. Modem. —In 1783 Bodoni designed the modem roman. It was welcomed by printers as an-inriovation, and it marked the end of three centuries of old-style monotony. While old-style has regained favor for display work, the modern roman is still used for newspapers, dictionaries, encyclopaedias, and scientific books.

This line is set in Bodoni This hne is set in Scotch-face Roman

Specimens of Modern Type Faces.

78. The Serif. —It will be observed that the letters in three of the five groups into which type faces have been divided have small projections at the top and bottom of the letters. These projections are known as serifs. See Fig. 29, which also shows

Neck, or beard

Fin-mark-

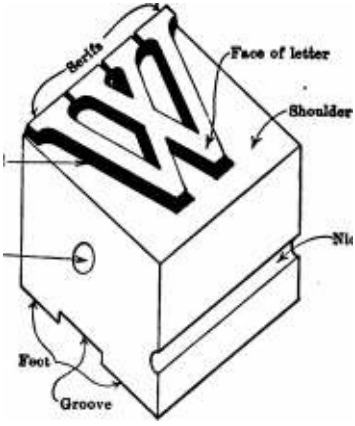

FiG. 29.—Showing the Various Parts of a Type.

the various parts of a t)rpe. Authorities claim that the serif probably had its origin in the necessities of the old stone-cutters, who could not cut a V-shaped letter in stone and still have the ends clearly defined. To admit light into the dark recesses, a sloping chisel-cut was made, thus adding the serif. This addi-

Digitized by VjOOQiC

tion of the serif not only made the letter more readable, but gave a distinct characteristic to it. A study of t)rpe faces reveals the fact that the serif is really the dominating feature of the letter, and that one type face can be turned into another, simply by altering the shape of the serif.

In an extremely masterful article, printed in "The Graphic Arts" for March, 1911, Henry Lewis BuUen showed how he

had set a line of gothic type of normal weight of line and width of body and had it photographed. He had ten prints made from this model. To each of these models a different serif was added, thereby producing ten entirely different faces of t)^e. The student is urged to read this article, for the author believes it to be a most valuable contribution toward the study of type faces.

79. Old-style and Modem Serifs. —^That the student may readily perceive the difference in the two forms, the old-style and modem serifs are here compared.

ABCDEFGHIJK

LMNOPQRST

U V W X Y Z

abcdefghijklm

nopqrstuv

w X y z

Fourteen-point Caslon Old-style.

ABCDEFGHIJK LMNOPQRST

U V W X Y Z

abcdefghijklm

nopqrstuv

w X y z

Fourteen-point Bodoni

Digitized by VjOOQ iC

app

Observe that in the old-style the serifs are all oblique or sloping, whereas in the modern they are all straight and lighter in weight. Note that all terminations are oval in the old-style and round in the modem. It will be seen that the finials of the a's and t's of the old-style turn out, while the modem ones turn up. The capital E*s and T's of these groups are radically different. These are but a few of the distinguishing features. The student should critically contrast these two faces and note their differences. See also Fig. 30.

Owing to the fact that Caslon Old-style, Bodoni Modern,

these two roman letters have pic. 30.—Showing Diflferences in

radically different character Old-Style and Modem Serifs

istics, it is considered bad typography to use them both in one type composition.

Old-style and modern letters are cut in both roman and italic.

80. Other Groups. —Mr. BuUen further subdivides roman letters into two groups— Display Types and what he calls Publicity Types, The first includes all so-called fancy or ornamental letters and such faces as antiques, ionics, latins, job faces, etc., which are unsuited for setting in page form. The second includes Cheltenham, Delia Robbia, Pabst Oldstyle*, and Bewick Roman, and are those letters unsuited for book work, but very appropriate for books of luxury and for commercial publicity.

81. Cheltenham Oldstyle. —^At this writing, typefounders seem to be vying with each other in the production of letters of the publicity group. Cheltenham Oldstyle was one of the first to be produced. Just why the word Oldstyle was added to the name is conjectural, for the letter is lacking in the strongest of the old-style characteristics—^it has straight instead of

* The term " old-style" is used in three different ways by typefounders—Old Style, Old-style, and Oldstyle. The American Type Founders Company uses Oldstyle as one word, consequently in naming their products the name is so given. The author prefers old-style.

Digitized by VjOOQiC

sloping serifs. The form of the serif is well worthy of study. Fig. 31 shows a capital R. Notice the rounded ends and also the rounded brackets of the serifs.

R

Fig. 31.—^A Capital R of Thirty-six-point Cheltenham.

This paragraph has been set in Cheltenham to show the long ascenders so characteristic of this family group.

82. Clearface. —From time to time experiments have been made to ascertain just what features of a type face were strongly conducive to legibility; the object of these experiments being to incorporate these features in one t)rpe face and produce a letter of maximum legibility.

Such an attempt on the part of L. B. Benton and his son Morris has resulted in the production of the type face known as Clearface. A comparison of this letter, which is an old-style, with other old-style types shows many advantages in its favor. In so far as possible, each lower-case letter has been cast so as to present an equal amount of white space on each side, and the letters a and s have been opened up so as to introduce white space and make them more legible. The general effect of Clearface is that it presents a uniform amount of white throughout the line. The resultant legibility

is particularly noticeable in the smaller sizes.

This line is set in Ten-point Clearface

83. Type Families. —It has not been many years since the average piece of job composition contained a multitude of inharmonious t)^e faces. This was due, in part, to the fact that a given type face did not run the whole gamut of form from an extremely condensed letter up to an extremely extended one. The necessity for typographical "hash" no longer exists, for type faces are now cast in "families." That is, the facial char-

Digitized by VjOOQiC

Specimens of type faces cast by American Type Pounders Company.

Specimens of type faces cast by Keystone Type Foundry.
Fig. 32.—Comparison of Type Faces.

Digitized by VjOOQiC

acteristics of the letter prevail throughout all the diflFerent sizes and forms. Consult any typefounder's specimen-book and examine the family groups.

84. " Pi " as an Aid to Type Study. —^The average compositor is rather prone to toss into the quad-box the occasional wrong font that he finds misplaced in a case. Not

only does this litter the case, but it keeps that particular sort out of its useful and proper place. The sorting of pi is a valuable aid to the study of type faces, for in the process of locating the letters the student may have to analyze every type face in the office. Do not leave wrong fonts in a case; put them where they belong.

85. Comparison of Serifs. —On page 81, Fig. 32, will be found a number of letters showing different forms of serifs. Make a comparison of them, and endeavor to pick out those possessing old-style features. Note that it is the formation of the serif, the shape and inclination of the final stroke, and the relative thickness of the major and minor elements, that give each letter its distinctive characteristics.

Pick out those of modern form.

86. Swash Letter. —Quite a number of the latter-day fonts of itaUc type have letters with ornamental projections. These are known as swash letters.

^A i \ g ^ ^

QUESTIONS ON CHAPTER VI •

1. Name the five different headings under one of which each type face must fall.

2. Describe the main characteristics of each of the five groups.

3. How can you distinguish old-style from modem ?

4. Why was italic type so called ?

5. Is gothic type property named ?

Digitized by VjOOQiC

6. Why was script type so called ?

7. When and by whom was modem roman first cut ?

8. What noteworthy features can you point out in the specimens of Bodoni and Scotch Roman shown on page 77 ?

9. Is your favorite newspaper printed in old-style or modem ?

10. Is the text of this book printed in old-style or modem ?

11. What is a serif ?

12. What influence has a serif on the appearance of a type face ?

13. What is the supposed origin of the serif ?

14. What are the predominating features of Cheltenham Oldstyle ?

15. Why is Clearface so called, and what object did its inventors hope to attain?

16. What do you understand by a type " family" ?

17. What advantages are to be derived from sorting " pi " ?

18. Set up a line of cap £'s of 24-point light-face gothic, spacing the letters } inch apart. Add serifs of different kinds to these samples and note how different faces are produced.

Digitized by VjOOQiC

CHAPTER Vn JOB COMPOSITION

87. General Survey of the Field. —^Job composition is that branch of t)^esetting which embraces the assembling and arranging of display letters. It calls for considerable knowledge and skill on the part of the compositor, and in return offers splendid opportimities to persons of artistic temperament. There is a strong fascination about the work, and the accomplishment of a perfect piece of printing affords much satisfaction.

Skill of no mean order is required to analyze a piece of manuscript and from such analysis to plan and work up into type a" piece of composition pleasing in form, nicely grouped, properly spaced, and with all its elements in perfect harmony as regards type, color, mass, and appropriateness. This is the ability that every compositor

should possess. That every compositor does not possess it, however, is evidenced by the fact that in many large printing offices an expert known as a layout man is employed to do all the planning, leaving the actual setting of the type to the ordinary workman.

88. The Layout Man. — ^It is the duty of the layout man, or '^typotect" (typographical architect), to prepare a plan of the job (known as a layout), and show thereon just what groupings are to be made, and what kind and sizes of type are to be used. The t)^otect is usually the best-paid man in the office, and the student is urged to try to measure up to the requirements of the typotect's job, and not be satisfied with being simply a workman of mediocre ability. Of course, this means constant study, but it also means time well spent, for increased opportunity and better remuneration are boimd to follow.

Digitized by VjOOQiC

89. Fundamental Principles.' —Before proceeding with the actual setting of a job, it is essential that the student should have some knowledge of the fundamental principles underlying correct composition. These principles are discussed imder these subject-headings: Optical Center, Balance, Harmony, Tone, Contrast, Appropriateness, Grouping, and Proportion.

90. Optical Center. —It is conceded by all artists that the optical center of a composition is not at the geometrical center, but is slightly above it. Anything placed in the exact center of a page has the appearance of being below the center. This is an optical illusion. A famiUar example of optical illusion is seen in the letter s. The upper bowl of the letter is smaller than the lower, yet they appear to be the same size. If the s is inverted so that the larger part is on top, the discrepancy is quickly noted.

Two eminent typographers are at variance regarding the optical center of a page. Gress says it is three-ninths of the distance from the top, Trezise says three-eighths. The author favors three-eighths. (See Panel Grouping.)

91. Balance. —^According to the law of levers, a heavy weight on a short arm can be balanced by a light weight on a long arm. The balancing of type groups on a page or in a piece of composition follows the same law. If the groups around the optical center of the page are arranged in such manner that the size or apparent mass-weight of each group is inversely proportional to the distance from the optical center, the composition will be properly balanced. Figs. 33 and 34 show two pages, one properly the other improperly balanced.

It will be observed that the upper group in Fig. 33 is apparently about five times as heavy as the lower group, therefore the lower group is placed five times as far away

from the optical center. This same principle of balance prevails in every piece of composition regardless of size or shape. When a mass is placed out of the center it requires something diametrically opposite to balance it.

Digitized by VjOOQiC

PRINTING

QCQ

<

00

>^

m Z

o

l-l (J

H

X u

<

m

s;

8

I

.a

Si

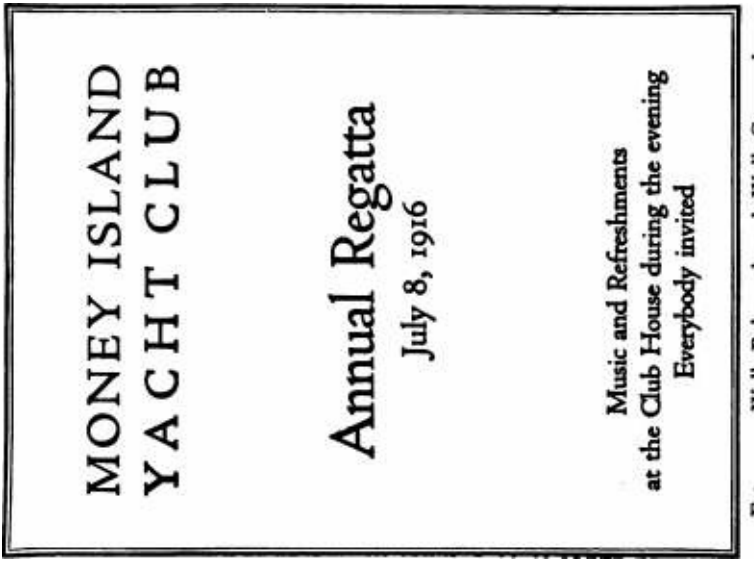

FIG. 33.—Well Balanced and Well Grouped.

Digitized byCjOOQlC

92. Hannony.— The Century Dictionary defines harmony as "any arrangement or combination of related parts or elements that is consistent or is esthetically pleasing; agreement of particulars according to some standard of consistency or of

the esthetic judgment; an accordant, agreeable, or suitable conjunction or assemblage of details." All the various harmonies (shape, tone, color, etc.) spoken of in printing conform to these definitions. When there are no discordant elements in a piece of composition there is perfect harmony. Harmony should be uppermost in the mind when planning a job.

Owing to the radical difference in the characteristics of old-style and modem roman type faces, these two styles should never be used in one piece of type composition. They do not harmonize. K a compositor adheres to one type family in setting a job, he is bound to have perfect harmony in type faces.

While text letters and gothics are of radically different cut, they may frequently be used together in a pleasing manner; especially if the text letter be used as the main, strong line of the job, and the gothic be subdued.

93. Tone. —^All type, rules, border, and ornamentation in a job should be imiform in tone. That is, if the general effect of the job is heavy in tone, then the rules, border, and ornaments should be heavy; if the general effect is gray, then the rules, etc., should be gray; if very light in tone, then everything should be light. Figs. 35 and 36 illustrate this point. In Figs. 37 and 38 the type lines have been transposed, thus showing how a job may be spoiled by a lack of tone harmony.

94. Contrast. —^The major portion of present-day printing has to do with advertising. In all advertising the object is to call attention to certain articles which are for sale. Each advertiser has his own idea as to how the subject matter should be placed before the reader in order to influence the sale. Many advertising campaigns have been dismal failures because the advertising matter has not been properly presented. All large business concerns employ advertising men who plan and pre^ pare copy for the printer. In numerous cases, however, adver-

Digitized by VjOOQiC

Digitized by VjOOQiC

JOB COMPOSITION

39

2 «

*^ « 2

2

C/3

I

I

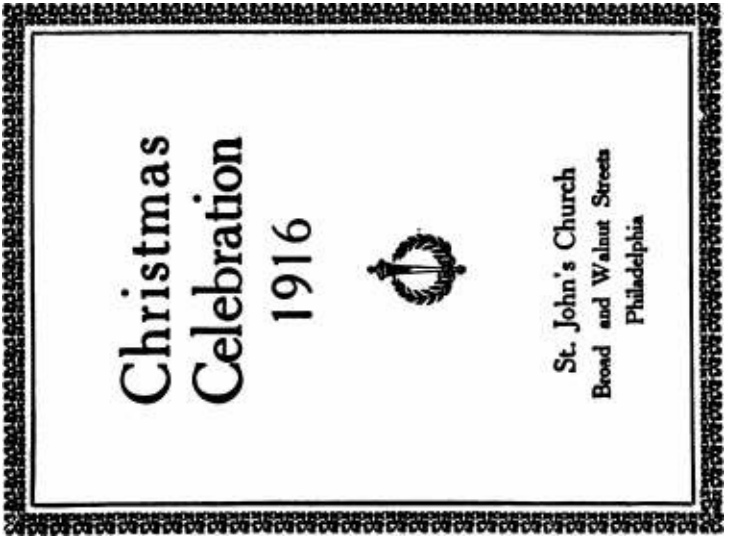

§

o

I

I

I

Digitized by VjOOQiC

tising matter reaches the printer in manuscript form, and he

must analyze and plan his own job.

In every well-displayed piece of printing there is one item that stands out above all others. This is the main display line. It stands out by virtue of contrast. It is either bigger or bolder than the rest of the job; sometimes it is both. Compositors frequently make the mistake of having their lines too nearly uniform in size to obtain contrast. A single line standing alone in a large, white space is very obtrusive. If surroimded with type matter of its own size it becomes lost. Display matter is usually at its best when surroimded by white space. Do not crowd the matter.

When planning a job, the compositor should endeavor to display it in type sizes that bear a true relation to the importance of the matter. In Fig. 33, which is a well-balanced job, it will be seen that the relative importance of the parts of the subject matter has been brought out in this way.

Black ink on white paper affords the strongest possible contrast. If contrast is desired with colored ink on colored paper, heavier faced type must frequently be used to obtain it. The compositor should consider stock and ink when planning his job.

95* Appropriateness. —^Appropriateness is the sine qua non of correct composition. No matter how well grouped or well balanced the job, no matter how perfect it may be in all

its other elements, if it is not appropriate to the subject it is a failure for the purpose intended. There are certain things in typography that may be called imwritten laws. One of the most important of these is that the type used in a job should be appropriate to the subject. Heavy-faced types are appropriate in printed matter for the iron and steel industry, but extremely out of place in millinery advertising. The latter requires dainty, light-faced types.

There is a series of display faces, called by Bullen "Publicity Types," that are extremely useful for advertising purposes. There is also another group adapted to editions de luxe. (See Section 80, page 79.)

Digitized by VjOOQiC

Inasmudi as text letters are of ecclesiastical origin, they are always appropriate in printing that is to be used for church purposes.

96. Grouping. —^Many compositors make the mistake of sprawling their jobs all over the page, the subject matter. thereby lacking cohesion. This is radicaUy wrong. In planning a piece of composition the copy should be analyzed and the various elements separated into imits or groups. Figs. 39 and 40 show two examples of grouping; they require no comment.

97. Panel Grouping. —^According to Trezise, in planning a

panel grouping consisting of two parts the page should be divided into eighths, apportioning three-eighths to the upper panel and five-eighths to the lower panel (see Fig. 41), because, as he says, "the small part is to the large part as the large part is to the whole; thus producing an exact ratio."*

The ratio three to five does not fulfil the rule given. Three is not to five as five is to eight; but

3-5--5-8i

In fact, the factors of a true proportion are incommensiurable. A close approximation, however may be had by assuming high factors for the ratio.

a: b :: b: a+b a+b=S

assimie, 89 : 144 :: x: S

solving, -^-—=4^ aiSX = b,b^4H

therefore 3t% UM •• 4ff • ^

♦See "The Graphic Arts and Crafts Year-Book for 1913-1914," Typography, page 33.

Digitized by VjOOQiC

Digitized by VjOOQiC

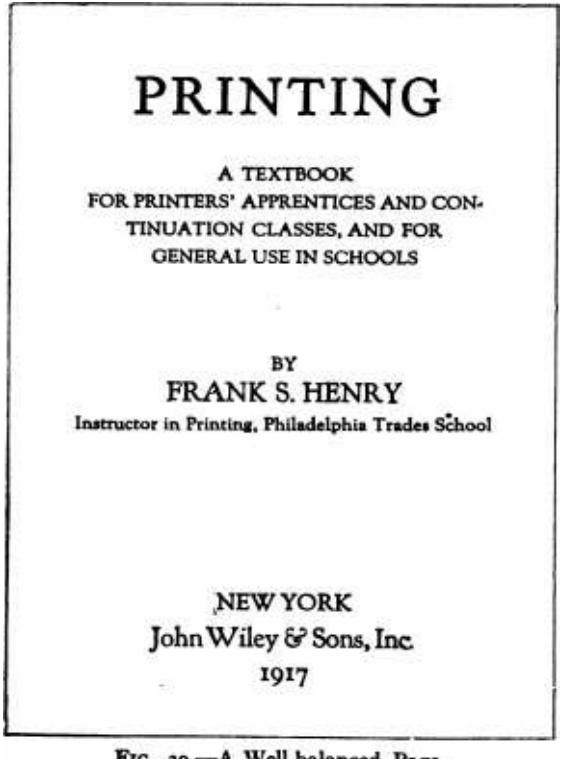

PRINTING

A TEXTBOOK
FOR PRINTERS' APPRENTICES AND CONTINUATION CLASSES, AND FOR GENERAL USE IN SCHOOLS

BY
FRANK S. HENRY
Instructor in Printing, Philadelphia Trades School

NEW YORK
John Wiley & Sons, Inc.
1917

FIG. 39.—A Well-balanced Page.

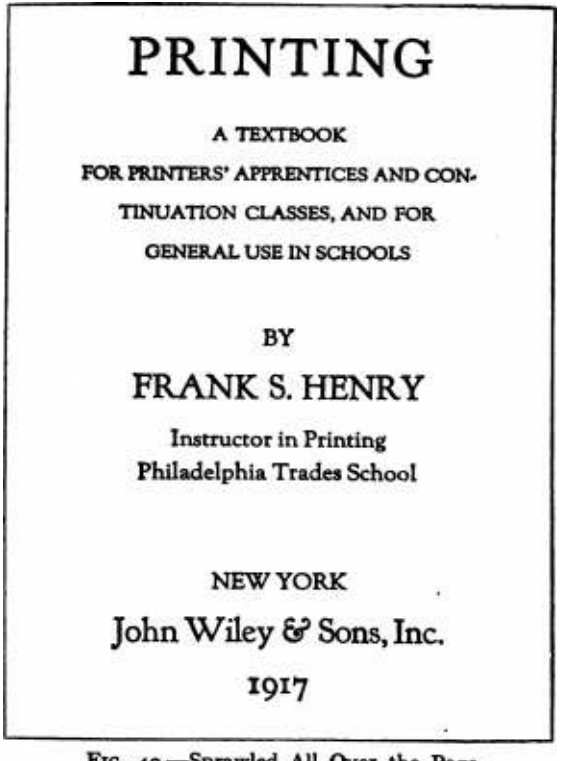

PRINTING

A TEXTBOOK
FOR PRINTERS' APPRENTICES AND CONTINUATION CLASSES, AND FOR GENERAL USE IN SCHOOLS

BY
FRANK S. HENRY
Instructor in Printing
Philadelphia Trades School

NEW YORK
John Wiley & Sons, Inc.
1917

FIG. 40.—Sprawled All Over the Page.

PRINTING tf-ytf

Means o/Education

Excerpts from a copyrighted article by Miss Katharine M. Stillwell, in "The Inland Printer" for June, 1916.

FOUR and a half years ago there were in use only fifty-seven school printing outfits in the United States. Today over nine himdred teachers are teaching printing in as many schools and shops. The value of their equipment runs into thousands of dollars, and the marvelous response, both in numbers and in enthusiasm, which greeted the call for'this organization testifies, as nothing else could, to the educational interest in this subject.

It is well, I think, that we should pause in this point in our progress, for this occasion marks a stage in our history, and consider what this phenomenal growth means. How much of it is the result of the popidar cry for trade schools, vocational training, and industrial education? What part, if any, is due to the inherent educational value that lies in the subject itself ?

Fig. 41.—Panel Grouping.

Showini^ use of 3-point bevel-face rule. The bevels have been placed toward eachfp other, leaving the i-point face outward in each case. Inside and outside miters have been

used in making the comers. The upper panel is approximately three-eighths of the length of the page.

This gives 3^^ parts to the upper panel and 4ff to the lower. If the dimensions were in inches this would place the dividing-line four points lower than three inches.

Inasmuch as true art is not based on mathematical accuracy, the dimensions given by Trezise are sufficiently close, but thiey are not in exact proportion.

This ratio is the so-called "golden ratio" of Greek art.

98. Mass Grouping. —^In planning groupings it is sometimes foimd that a small, dark mass must be balanced against a large, gray mass. In such cases, the placing of these masses should follow the law of levers, each group being considered according to its apparent mass-weight, and correspondingly balanced aroimd the optical center.

99. Proportion. —^There is a variance of opinion among typographers as to what constitutes a true proportion in a type page; that is, what relation the width of the type should bear to the length. Some say that the width should be to the length as eight is to twelve. Others say that the diagonal should be twice the width. The pages of this book follow the last named. They are twenty-two picas wide and forty-four picas diagonally from the folio to the other comer. If it is desired to determine how long any page should be to

conform to the diagonal method, the length may be foimd by multiplying the width in picas by 1.7321. 22X1.7321 = 38.1 picas, the length of this page.

A display of high-class printed matter was made in Philadelphia recently at which the samples were all chosen as models olf their kind. The author made quite an extended search to find whether any uniformity of relation between width and length of the printed area was shown, but could find none. A search through the Philadelphia Public Library revealed the same lack of imiformity. It is imdoubtedly true that art can never be reduced to mathematical proportions. There are some shapes and forms, however, that always afford pleasing proportions, and the more nearly we conform to those shapes the more certain we are of success. Occasionally some expert typographer will apparently violate all the rules of art and

Digitized by VjOOQiC

produce a pleasing result. No one but a true artist can do it, and the average man is advised not to attempt it.

100. Table of Proportions. —It is evident from a study of the subject of type proportions just given that typographers have

not agreed on any standard. This brings up the question, Is it possible to formulate a table of good proportions ?

It is conceded that when a page is narrow its length can bear a greater ratio to its width than when the page is broad. This being the case, why not arrange proportions according to a gradually varying ratio—say in multiples of five ? Taking this as a basis, and using multiplying factors that decrease for each five picas increase in width, and arranging them in quarter ems of pica. Table V is obtained.

TABLE v.—RELATION OF WIDTHS AND LENGTHS

In the preparation of this table the length at the head of each column was determined by multiplying its width by the multiplying factor, then the intermediate length between that and the succeeding colimm was divided into five parts, in the nearest measure to quarter ems. This was done for all columns except the last, where a slight variation was made in order that a fifty-pica width would come out fifty-five picas long. This should prove close enough for all practical purposes.

Digitized by VjOOQiC

Fig. 42 is a graphic representation of the resultant proportions. The dimensions are in picas, but the diagram is

slightly less than half size. The figures down the left-hand side show the differences in picas between the different lengths.

Fig. 42.—Graphic Representation of Proportions.

loi. Standardizing Proportions. —Mr. W. R. Colton, in the January 20, 1916, issue of "The American Printer," has an interesting article on standardizing proportions for the size of the paper (not type) used in books and other printed matter.

Digitized by VjOOQiC

He points out the fact that four different oblongs have, from time to time, been in use by printers. He presents them mathematically and algebraically as follows:

Printers' Oblong, 57.73%, or sa^=b^; Regular Oblong, 66|%, or i|a=6; Golden Oblong, 61.8%, or a: b :: b: a+b; Hypotenuse Oblong, 70.71%, or 20^=IP.

The percentage given with each means that the width is to the length as the percentage given is to 100.

He calls attention to the fact that with the Hypotenuse Oblong the ratio is not changed by folding. That is, if we take a sheet of paper of any size whatever and have its width 70.71 per cent of its length, and fold the sheet in half, its dimensions still bear the same ratio—70.71 to 100. No matter how many times the sheet is folded, the same ratio of width to length

remains.

While the folding of the sheet does not affect the proportion, just as soon as the page is imif ormly trimmed (say i or J inch all aroimd), it no longer possesses the same proportion. If it is desired to retain the proportion 70.71 to 100, the page must be specially trimmed to properly computed amoimts for the width and length respectively.

The process of determining the percentages given above or of determining actual dimensions when percentages are not known, all involve extraction of square root. This process frequently consiraies considerable time, and is not to be recommended for shop practice. The giving of the proportions on a percentage basis is a step in advance, but even percentage is confusing to some people.

In the teaching of mathematics to printers' apprentices, the author has worked out many problems involving well-propof-tioned pages, and has evolved a simple method of determining

Digitized by VjOOQiC

them. If it is once determined what length any oblong should have in relation to its width, the length divided by the width gives a multiplying factor, or constant, from which the correct length for any given width is quickly foimd by simply multiplying the width by the multiplying factor to obtain the

length. The following are the multiplying factors for the different oblongs:

Printers' Oblong, 1.7321;

Regular Oblong, 1.5;

Golden Oblong, 1.6181;

H3^otenuse Oblong, 1.4142. With a width of six inches the lengths are therefore: Printers' Oblong, 6"X 1.7321 = 10.3926" long; Regular Oblong, 6"Xi.5 = 9" long; Golden Oblong, 6"X 1.6181 = 9.7086" long; Hypotenuse Oblong, 6"X 1.4142 = 8.4852" long. See also Section 251, page 277.

102. Borders and Ornaments.— There is diversity of opinion regarding the use of a border on a page. Some contend that printed matter requires no embellishment; that the text, be it body type or display, serves its purpose better if imornamented. The extreme simplicity of some jobs gives them a dignity that would be marred by embellishment. Again, there are others that have been made beautiful, appealing, and forceful by jtidicious ornamentation. But, beware of overelaboration. A title-page or booklet cover containing but few lines usually looks better if placed within a border, which serves, in a sense, to hold the job together.

Our ideas of ornamentation are evidently a heritage, for the hand-written books of the early scribes were profusely

ornamented. The tendency toward ornamentation seems to become

Digitized by VjOOQiC

marked at recurring periods of varying length, each of which reaches a period of delirium, only to be followed by a decadence until a point of extreme simplicity is reached. The keynote of modem composition is simplicity; the day of over-elaborate ornamentation has undoubtedly passed.

Ornamentation to be effective must be in perfect harmony with the rest of the job. It must match the job in tone and shape, and be appropriate to the subject. If the general configiuration (type, spacing, grouping) of the job is square, a square ornament offers the best shape harmony; if it be irregular in outline, a rounded or pyramid form is better. Pyramid ornaments usually look better if inverted.

103. Initials. —^An initial may be considered as part of the ornamentation of a job, and should conform to all the rules given under that subject. If the text and initial are in one color, they should harmonize in tone and general conformation. If the initial is to be printed in a different color, it may advantageously be a little heavier; the tone, however being conserved by a judicious use of color.

The word of which the initial is a part should be set in capitals. If it is a word of less than three letters, the next

word should also be in caps» If the first word is part of a name or title, the whole name or title should be in caps.

If the initial is the article A or the interjection O, the second word should be in caps, and there should be a space between the words.

It is customary to have the same amoimt of white space along the side of an initial as at the bottom. In order to accomplish this the text must be set to conform to the shape or outline of the letter. The subjoined examples and explanations cover the matter in detail.

LETTERS like the capital A and the capital L should be mortised to accommodate the balance of the word -^ so that there will not be an unsightly gap between the initial letter and the balance of the word.

Digitized by VjOOQiC

Although the capital a is mortised when it is a r'\ part of the first word of the paragraph, there is no occasion for doing so if the paragraph begins with the article A.

A PARAGRAPH that begins with the single letter A requires space between the initial and the succeeding word; moreover, the second word should be all in capitals. This paragraph shows how the matter should be set.

WHEN the letter W is used as an initial there is no need to

indent the lines that run beside it, because the slope of the letter affords sufficient white space to present a pleasing appearance.

IF THE paragraph begins with a two-letter word, it is customary in most offices to capitalize the second word. K the first word k a proper noun, capitalize the whole name.

FOR initial letters that contain enough white space on the body of the type there is no need to allot any extra space when running lines around them. There should always be enough matter to surroimd the initial.

ENDEAVOR at all times to have an equal amoimt of white space aroimd an initial. Just how much will depend on the amoimt of ^ace left beneath the initial. The letter T contains enough white space on the body to avoid any necessity for additional space in the line.

THE initial should line up with the top of the balance of the word. If possible, use an initial that is a multiple of the body size, so as to avoid too great an amoimt of white space beneath the letter.

Digitized by

Google

JOB COMPOSITION /- : : : /o^:;: :.

»|HIS initial occupies the full body of the letter. It is, therefore, necessary to indent the lines that run aroimd it so as to present a uniform amount of white space. When the initial is an even multiple of the body size, the right amount of space is easily determined.

mi^^

J)HOSE initials that are surrounded with filigree work should be so placed that the balance of the word lines up with the top of the initial. Just how much indention should be given to the type lines will depend entirely on the appearance of the background. In general, dark backgrounds require more space than light ones.

104. Shape Hannony. —^The exigencies of the work and the office equipment sometimes compel a compositor to use type that is unsuitable. When he is unrestricted, however, he should endeavor to have the shape of his type harmonize with the shape of his job. A long, narrow job looks well if set in condensed type; a broad job can stand an extended letter. Never use extended type in narrow measures, or condensed type in wide measures, unless compelled to do so to make the matter fit the space.

105. Selecting the Salient Features of a Job. —If the copy comes in the form of manuscript, and no layout is given, the compositor should go over it and pick out those features admitting of best display. In planning the work he should have in mind the fact that the job must possess all the requisites of balance, harmony, and appropriateness. It should be pleasing in ail its groups, and each item should be given the prominence due its importance.

For office stationery, the usual order of importance is first the name, then the business, then the address. This order does not always prevail, however; some customers preferring to have other items of importance given more prominent display.

Digitized byVjOOQlC

If the job be advertising matter, the main features for display are usually designated by the customer, the groupings and the selection of type being left to the compositor. Successful treatment of such a job is the crucial test of his skill. There may be a dozen different ways in which the job cotdd be set, nearly all of them yielding pleasing results. If the job is to be a complete success, however, its various elements must harmonize in tone, be well balanced, nicely grouped, and the display must have enough white space around it to cause it to

stand out distinctly.

io6. Improving a Job.—It frequently happens that, after a compositor has pulled the proof of a job, the result falls short of his expectations. In such case he may find on careful study of the proof that a change (sometimes a very slight one) in the spacing will greatly improve its appearance. The insertion or removal of even one point between lines will sometimes improve the work. Cultivate the habit of analyzing yoiu: work with a view to improving it.

Occasionally a job that is extremely ordinary looking in black ink on white paper can be improved by printing it on colored paper with some harmonizing ink.

107. Spacing Job Type.—^The spacing of lines in solid matter has been pretty thoroughly treated imder Spacing, page 17. In spacing job type each line is a problem by itself. Lines standing alone, with plenty of white space aroimd them, need more space between words than when surroimded by other matter. Extended letters require more space than normal or condensed ones. Lines in capitals require more space between words than do lines set iu lower-case.

When spacing lines in capitals, where the letters are straight, like M and N, more space should be used than when the letters are sloping or open, like A, L, W, and Y. Such letters show some white space, and this should be considered when

spacing the line.

108. Letter-spacing.—^It frequently happens in setting lines in capitals that certain combinations of letters, like A and

Digitized by VjOOQiC

T, A and V, etc., occur, and the space between the letters lacks uniformity. To obviate this, letter-spacing may be employed to improve the appearance, or the letters may be shaved and "fitted" together. The following examples will illustrate: This line shows the type just as set from the case.

HIGHLAND AVALON

Here is shown the same line letter-spaced to make the space between the letters uniform with the space between the V and Ain"Avalon."

HIGHLAND AVALON

In the following line the V and the A's in " Avalon" have been shaved oflF and closed up and the balance of the line letter-spaced to show uniformity in "fit."

HIGHLAND AVALON

At different times typefounders have cast type with mortices so that when certain letters come together they will dovetail. The line below shows how this is done.

WAYERLEY TALES

Unmortised

WAYERLEY TALES

Mortised

log. The Square Effect. —Sometimes in setting a job the lines are so nearly of uniform length that there is not enough variation to give a pleasing grouping. In this event it is advis-

Digitized by VjOOQiC

able to letter-space the lines and make them all of the same length, thus producing a square eflfect. Some compositors, actuated solely by artistic motives, leave off all marks of pimctuation and make improper divisions of words to accomplish this purpose, but such practice is not to be commended.

no. Selection of Rule for a Job. —^Inasmuch as rule may be considered as part of the ornamentation of a job, all that has been said about harmony, tone, appropriateness, etc., prevails in the selection of rule for a job.

Rule is the name given to the material used for printing lines of various lengths and widths. It is type-high, and comes in a variety of faces. It varies in width of face from a hair-line to

upward of a pica. For many years it was obtainable only in brass, but of late both the Linotype and Monotype companies have added to their machines attachments for producing leads and slugs and also rules of various kinds. The product of the linotype machine is restricted to six-inch lengths. If longer lengths are needed, two or more pieces must be placed end to end. The monotype machine can produce leads, slugs, and rule of any length. A two-point rule six himdred feet long has been cast. The latest device on the machine will cut the material to any length from one inch to twenty-five inches.

As may be inferred from a consideration of the alloy of which it is composed, 7e(w/ rule is not as serviceable as brass. K rule is to be in constant use, it should be of brass. If it is to be thrown away, and new and perfect material used on every job, lead rule answers the purpose.

Brass rule is made from strips of metal.rolled to absolute thickness between agate rollers. These strips come to the type-foimder a little over type-high. To prepare them for use the bottom of the strip is first dressed off with a plane and made smooth and level. Before the face is put on the rule a line is scratched along its side near one edge in order to designate which edge is to be the top. When using face-rule (the same on both edges), always keep it face side up. Using it indis-

Digitized by VjOOQiC

criminately will finally result in the rule being battered on both sides.

By far the greater part of the rule in use today is of brass. A study of a typefounder's specimen-book will reveal an infinite variety of sizes and kinds. A few faces are shown in Fig. 43.

Fig. 43.—Specimens of Brass Rule.

III. Aligning Rules with Type. —^When using rule and type in combination, it is important to have the rule in perfect alignment with the bottom of the type face. The face of the rule should also harmonize; that is, a light-face rule should be used with light-face type, and a heavier rule with heavy-face type.

Section

(Proper way)

Section

(Improper way)

Section.

(Harmonious)

Section.

(Inharmonious) Fig. 44.—Showing Proper and Improper Way of Using Rule with Type

When rules are nm the full width of the job the type lines are frequently printed above them instead of being justified with them. This results in a great saving of time, and avoids the frequent necessity of cutting rules to fit the space.

Digitized by

Google

Name

Address

Fig. 4$.—Another Method of Using Rules with Type.

When using two or more pieces of rule side by side, and the lengths are made up of more than one piece, never have the joints all in line. See below.

Proper way.

Improper way.

Fig. 46.—Proper and Improper Way of Doubling-up Rule.

112. Side-face or Chamfered Rule.^An extremely useful rule, but one that seems to puzzle some compositors, is the three-point side-face rule shown in Fig. 47. The face of the rule is not in the center but along one side of the rule. While inside and outside miters come with a full font of the rule, they are not needed to make a perfect corner. The rule is especially adapted to panel work, either single or double. Being on three-point body, it makes up to even multiples of pica. If, for any reason, it is desirable to have a piece three points more or

Digitized by VjOOQiC

less than an even em, putting an inside and an outside mitel together will produce it. (Fig. 48.)

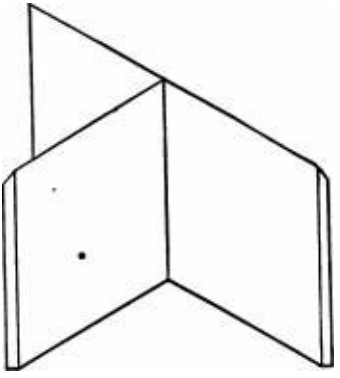

Fig. 47.—Showing How Three-point Side-face Rule Should be Butted to Make a Perfect Joint.

Placing one end of a piece of rule against the side of another piece produces a perfect joint. The face shown is adapted

Fig. 48.—Method of Joining an Inside and Outside Miter.

to many uses in job work. An example of its use is shown in Fig. 41.

113. Mitered Comers. —^When using parallel rule or a center-face rule, it is necessary to miter it to produce a perfect joint at a corner. If the rule be a fidl-face rule, it is not necessary to miter it, for the corner can be "butted."

Occasionally a job comes into the office and the size specified for the rule is not a regular multiple of picas. If the job is to be printed from type, it is necessary to cut the rule to the size designated. Never cut labor-saving rule for this

purpose. If the job is to be electrotyped, labor-saving rules may be used with the corners lapped as shown in Fig. 49, and the electrotyper can cut off the projections after the plate is made. Either

Digitized by VjOOQiC

side-face or full-face rule can be used for this purpose, but not center-face, for the face of the latter cannot be brought against the end of the rule.

Mitered Corner. Butted Comer. • Lapi)ed Comer.

Comers have been left open a little to show how they are joined.

Fig. 49.—Showing Three Methods of Joining Rule.

Instructions for mitering rule are given under "How to Use the Mitering-machine," page 203.

114. To Obtain Perfect Joints in Tables. —^Figs. 50 and 51 show two tables, the first with imperfect joints the other with perfect joints. The first one was set in columns and the rules inserted while setting. Owing to the fact that the column rules have shoulders on each side, the cross-rules cannot fit up against them. The second was made up into two sections and both

Fig. 50.—Usual Form of Hand-set Table, showing Imperfect Junction of

Rules.

Digitized by VjOOQiC

Fig. 51.—Showing Same Job as Fig. 50, but as it Appears when Printed in Two Impressions. See Fig. 98.

printed at the same time. The sheet was turned end for end and printed a second time. This printed one section over the other, thus producing perfect joints. Inasmuch- as both sections are printed at the same time the procedure does not entail any extra time in running the job, but it does produce perfect joints. Moreover, there is a great saving in time when setting the job, for the lines are all set full width instead of in narrow colimms.

K the job is so large that both sections cannot be worked in the same form, it is still advisable to set the job in this way and make two forms of it, especially if there are but few impressions needed, for the saving in composition will usually offset the cost of the extra presswork. This is sometimes called the wax-engraving effect.

115. Skeletonizing.—^When a job is to be printed in more than one color, and there is no overlapping of the colors, it should first be set up complete, and then taken apart and made up into separate forms. K any of the colors overlap, it is physically impossible to put both colors in one form, so the overlapping color is made up into another form. The taking apart and making up into separate forms for colors is known as skdeUmizing.

Digitized by VjOOQiC

The customary way of handling a two-color form is to set the job as if it were to be all in one color and have the proof approved. When ready to skeletonize, pidl a proof on dry paper to be used as a gauge for determining the correct position of the lines, then put the job on a galley and proceed to make it into two parts of equal size. How this is to be done will depend entirely on how the second color was originally placed. If a few lines are to be in a separate color, take out the lines, one at a time, beginning with the one nearest the top, and put in its place material of the same body size. Put the line on a galley, and place enough material above it to make it come in exactly the same position that it occupied in the original page. Go down the page to the next line, doing the same as before. In this way take out all the lines, substituting material of the proper size. If this has been properly done, the size of the original page will not have

been altered. The other page should now be spaced so that the lines come in the same position as in the orig-inal job. Use the dry proof as a guide for determining this.

If the job is a complicated one, and has words scattered throughout the text, it will be necessary to proceed in a different manner. For example, suppose the job is to be printed in red and black, and that the words in red are scattered among the lines of type. It does not make any difference how many separate words or items are to be removed from any one line, the method is always the same. Place the line in a composing-stick, remove the first word in red and substitute quads and spaces for the word, thus justifying the line. Then take out the next word in red, and rejustify the line, continuing in this way to the end.

The final result will be a line with material substituted for the words that are to go in red. It is now necessary to get these words in a separate line by themselves and in the same position that they occupied in the original line. To accomplish this raise the material that has been substituted for the first word so that quads may be placed between the left-hand side of the stick and the spacing material. Put in quads and spaces,

Digitized by VjOOQiC

and justify them accurately. Now put in the word. Next raise the material substituted for the second word, and fill in the space between the first word and the second spacing material. Justify this. Now put in the second word, and fill up the balance of the line with quads and spaces, and justify accurately. If this has been properly done, the result is a Une containing the words in red, each of which will be in the same position that it occupied in the original line. Fig. 52 illustrates

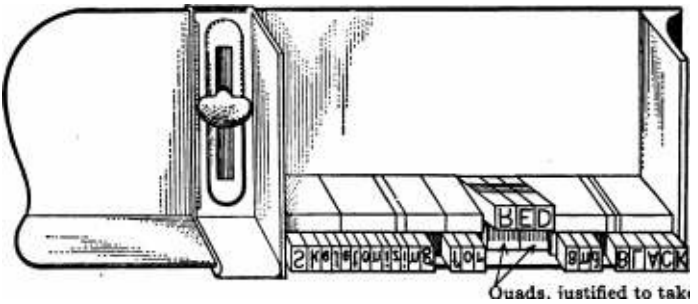

^uads, justified to take the place of the word Red.

Fig. 52.—Showing Method of Skeletonizing a Line for Two Colors.

the method even better than words can describe it. If desired, the first word could be justified in position before the second is removed.

Having skeletonized the line, replace the original line, and

place the other one on another galley. After all the individual lines have been skeletonized, assemble them in proper order and space out the job as in the original page, using the dry proof as a gauge.

If the job is to be electrotyped, there is no need to skeletonize it, if the colors do not overlap. When sending the form to the electrotyper, mark on the proof what parts are to be in each color. The electrotyper will take two casts from the form, and either block out in the wax or rout away the parts not needed in each form. .If an electrotyped job is to be printed in red, the electrotype should be nickel-plated, as copper usually has a deleterious effect on red inks, destroying the color and luster.

Digitized by VjOOQiC

ii6. Setting a Register Job. —It is evident from the description given in Section 115, that some of the lines in the job may have to be moved to put them into register, more especially if they are widely scattered. When putting together a form that may have to be moved, do not insert solid blocks of furniture, but be sure to have some leads and slugs between each group so that the lines may be readily moved without seeking new material.

117. Allowing for Squeeze. —^Nearly every piece of type composition is made up of a great number of individual units. Such a combination is almost certain to be springy, and

each job possesses a certain amoimt of "give." When making up a job, especially if enclosed with a border, press it together by hand, using considerable force, and when it seems to meet perfectly at the comers, add a two-point lead "for squeeze." When the job is locked up, these two points will be just about right for a perfect lockup. If the job is very long or very springy, additional "squeeze" should be allowed for.

118. Concluding Hints. —^All type is (or should be) cast on the point system, consequently each size of type is a multiple of another, and can be justified with it by the use of point material. Before putting the material together be assured that it is of the right thickness and of the proper length, that it is not battered, bent, twisted, dished, nicked, biured, or in any wise mutilated. Make sure that the material is perfect in every respect. If it is not, discard it. The trouble that it may cause would doubtless be more expensive than the cost of the material. If the defect can be easily remedied, do so.

Do not use leads that are too short for the measure; they are always troublesome.

When doubling-up leads (placing them end to end), be careful not to use leads of different thickness.

Burred quads are a frequent cause of trouble, and are hard to detect when in a form, especially if the burr is qear the bottom. Burrs on type or rule may easily be removed with a

flat file.

Digitized by VjOOQiC

When using a border made up of small tmits have a six- 01 twelve-point slug alongside of the border. K possible, do not allow any break in the line of imits to come directly in line with a break in the material surrounding it. If you do, the material will very likely slip or bind. (Fig. 53.)

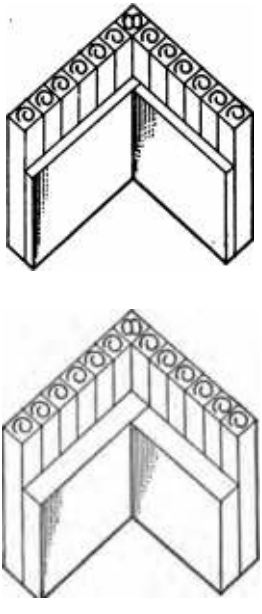

Proper Method Improper Method

Fig. S3.—^Proper and Improper Method of Placing Slugs inside of Border

Units.

Owing to the fact that letters used as initials are not always an even number of picas wide, the lines alongside of the initials are not always an even number of picas long. If the matter is leaded it is not always necessary to cut leads to fit the resultant space. Unless compelled to run the type right up against the initial, place enough material alongside of the initial to bring the remaining space to even picas. Do this for all the lines except the first, which should be close to the initial. Occasionally, if the space is a multiple of points, the use of point-thick spaces alongside of a pica-length lead will just be the right length.

The following spaces are each two points thick and may be used with two-point leads: five-em space of ten-point, four-em space of eight-point, and three-em space of six-point. By using a lead and some combination of these three spaces we can generally find a multiple to fit the space. With these, lengths may be built up in multiples of two points. For example: suppose that the resultant space beside an initial should prove to be twenty-one ems and three points. Place a three-point

Digitized by VjOOQiC

lead alongside of the initial and leave twenty-one ems as the measure for setting the type. If it is absolutely necessary to set the type right against the initial, and the leads must be

absolutely fidl length, then cut leads to fit. If the leads may be one point short of fidl length, make up a* combination to equal twenty-one picas and two points. A twenty-em lead, one four-em space of eight-point, and one three-em space of six-point will suffice. Twenty ems plus fourteen points equal twenty-one ems and two points.

QUESTIONS ON CHAPTER VII

1. What are the duties of a typotect ?

2. Where is the optical center of a page ?

3. What do you understand by " harmony " in a piece of type composition ?

4. Why should a mixture of old-style and modem roman type faces Im avoided ?

5. Explain " tone " as applied to a page of type.

6. Explain " contrast," and tell how it is obtained in a piece of composition.

7. What do you understand by "appropriateness" ?

8. Explain the fundamental principles of type grouping.

9. What do you understand by "proportion" ?

10. Name the four oblongs in use by printers at different times.

11. How is the multiplying factor, or constant, for the different oblongs obtained?

12. What rules govern the use of borders and ornaments ?

13. Explain how type matter should be run around initial letters.

14. Why is it inadvisable to use condensed type in wide measures and extended type in narrow measures ?

15. What special things should be kept in mind when analyzing copy preparatory to setting a job ?

16. If after setting a job it did not meet your expectations, how would you proceed to alter or improve it ?

17. Should a uniform amount of space always be placed between words in a line ? If not, why not ?

18. What is " letter-spacing," and why is it used ?

19. When the lines in a job are nearly all of the same length, why is it desirable to make them all of equal length ?

20. Name the different materials of which rule is composed.

Digitized by VjOOQiC

21. Explain the relative merits of lead rule and brass rule.

22. What is face-rule?

23. Name the kinds of rule with which you are familiar.

24. How should rule be aligned with type ?

25. When lengths of rule are made up of two or more pieces, how should the joints be arranged ?

26. What is a mitered comer ?

27. What is a lapped comer ?

28. Explain how perfect joints may be obtained in a table consisting of horizontal and vertical lines.

29. What do you understand by skeletonizing a form ?

30. Describe how you would skeletonize a form for two colors if the second color consisted of full lines only. How would you proceed if the second color consisted of words scattered throughout the job ?

31. What special provisions are to be made when setting a regbter job?

32. Why is it necessary to allow for squeeze ?

33. Why is it inadvisable to use leads that are too short for the measure?

34. When doubling-up leads, how should they be placed together? Tell why.

35. When making up a border consisting of twelve-point units, why should we use a six-point slug instead of a twelve-point slug alongside of the border units ?

36. Explain how type set to a bastard measure may be leaded by using labor-saving leads and point-thick spaces.

Digitized by VjOOQiC

up. The Order-blank.— Nearly every printing office has a different style of order-blank. Fig. 54 shows one that has been in successful operation. All the data regarding composition, presswork, binding, and delivery is written out in full, so that there can be no doubt about any part of the work. The compositor is chiefly concerned about the size of the job, the purpose for which it is intended, the color and nature of the stock, and the color of the ink.

Referring to the order-blank, we find that it calls for a letterhead, 8^X11 inches. So that there may never be any

doubt as to which way the type is to be set, the width is always given first. The type is, therefore, to be set the 8J-inch way.

The letterhead is to be printed in bronze blue ink on light blue paper. It is business stationery for a book house. Work of this nature and with this combination of colors always looks well when set in some old-style type face of medium weight. Cloister, Cheltenham, Kennerley, or some letter of about equal weight, would look well. Cloister is chosen for illustration, mainly because it is a new letter, and quite the vogue.

The copy is manuscript, and reads as follows: F. A. Williams, President; C. W. Brown, Vice-President; John Adams, Secretary-Treasurer. F. A. Williams & Co., Historical, Educational, Scientific, Art, and Law Books, 1217 Printing House Square, Philadelphia, Pa.

120. Analysis of the Copy. —^A brief analysis of this copy reveals the fact that it can be grouped satisfactorily in several different ways. To obtain a proper conception of the finished

Digitized by VjOOQiC

117

OlDn Ho.

READ CAREFULLY

HO JOB to b« BIT or Slirrld PUSS WITHOUT u OEDBR

Date

for

:^.Jf. 2i^ee<U:c.,^"^'<^ '"

/?. /?/^

Address

/^/7 (PyU^r^^tC^ ^^VC<JL

QdMitity /OO O TiUe of Job

OU

D6SCTft)tion

dCaJI^CiA/AjLA^

C/^^U'-r^.^CX^ ..^tX: j^^

Stock

Oover

C^r^-X^g-y^.^atj^ ^2>^v^^ %/^<^>>«a^

ORDERED FROM

/7 X JLX —JLO

ORDERED FROM

Out Stock 8iie

Out Oover Siio

Ealing

Tableto

Shipping Directions ^^^

7/J.6//6

AMomra

DAn

Date of Delivery

^ Orter Received By ^* ^'

Fig. 54.--A Typical Order-blank, ,.g,,,, ,^ GoOglc

Fig. 55.—Suggested Groupings fgr Letterhead.

Digitized by VjOOQIC

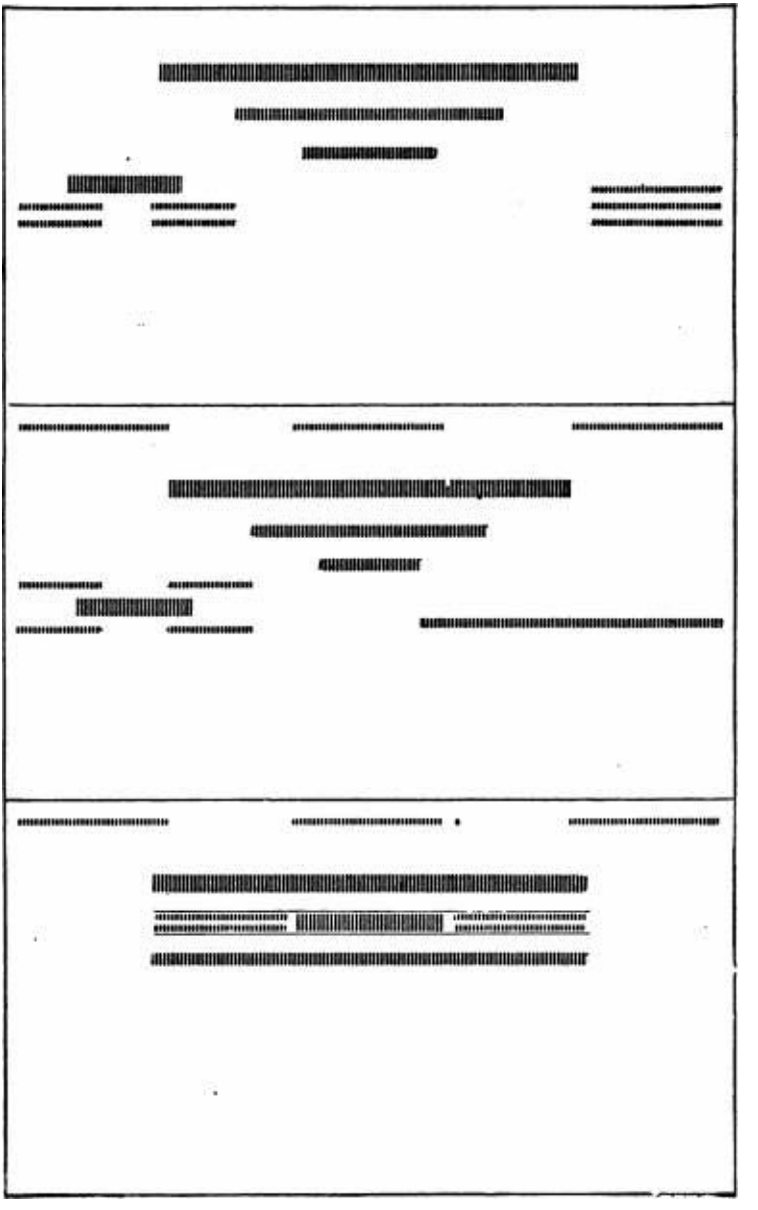

Fig. 56.—Suggested Groupings for Letterhead.

Digitized by VjOOQiC

appearance of the job a layout is first made in the form of a few rough pencil sketches on paper 8| inches wide. See Figs. 55 and 56. When making pencil sketches always use paper of the exact size of the job, for you will thereby get a better idea of its appearance when put into type. When you sketch a line, approximate both its type size and its length. Do not sketch long lines to fill up a space when you know that the type selected will not rim that long. You may in this way sketch a well-

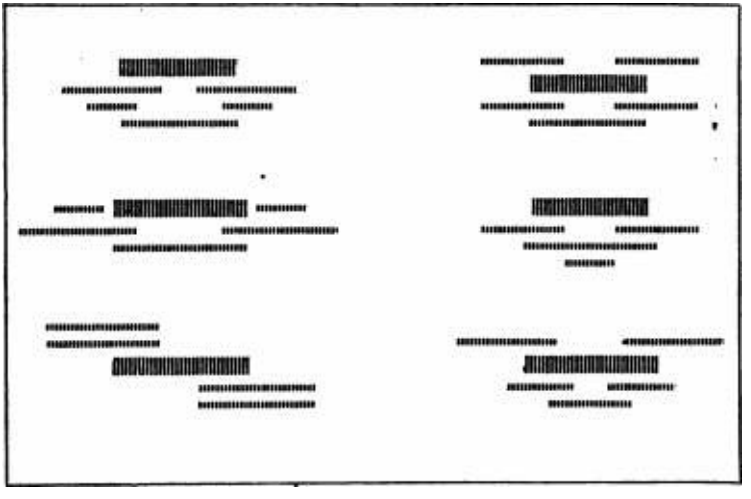

FiG. 57.—Other Groupings for the Word " Books " and its Qualifying Adjectives.

balanced layout, but you obtain no idea of the appearance of the finished job.

From your rough sketches select the one that to you seems the most pleasing. Suppose this to be the one that features the word "Books," on the left-hand side. There are at least a half-dozen different groupings to be made of these words, see Fig. 57. Assimie for the purposes of the present discussion that Number 2 is finally selected; the compositor is now ready to put the job into type.

Digitized by VjOOQiC

There is ample space on the letterhead, so there is no need to crowd the matter. The main line should fall about seven-eighths of an inch froto the top, and the list of officers from one-fourth to three-eighths of an inch. The side margins should be about one-half inch on each side. This will leave the measure forty-five picas.

Set the body of the heading to forty-five picas. The word "Books" and its qualifying adjectives should be set in a smaller measure, so that it may be leaded out or placed in any position without interfering with the date line. Even if there were no date line it would be advisable to set this in a narrow measure to avoid using up a quantity of small . material.

The featuring of the word "Books" also gives opportunity to put this word in some contrasting color, if the customer is wiUing to pay the price of a two-color job.

X2I. Size Type to be Used. —Unless advised to the contrary, it is safe to assume that the following is the order of importance for display lines—^name, business, and address. Following this schedtde for the letterhead, twenty-four point type may be selected for the name, fourteen-point for the word "Books," and twelve-point for the address. Six-point is large enough for the officers' names, and also for the adjectives aroimd the word "Books." There is sufficient contrast in size in such a selection to secure the proper relative importance. Moreover, the fact that the lines are not crowded tends to set them off to advantage.

122. Position on the Sheet. —When planning for the position of the main line on a letterhead the compositor should be governed entirely by the grouping and the amount of material on the heading. A heading that contains but a few lines, and those short ones, can usually stand more space than can one that contains much matter and whose lines are long. If there is a line across the extreme top, three-eighths of an inch from the edge is about the right distance, and seven-eighths of an inch is about right for the main line. There is no absolute

Digitized by VjOOQiC

Fig. 58.—Layout for a Statement on Ruled Stock.

Fig. 59.—Layout for Statement for Outlook Envelope on

Unruled Stock.

Digitized by VjOOQiC

SETTING A JOB

123

F. A. Williams, Pros. C. W. Brown, Vice-Pres. John Adams, Sec.-Treas. STATEMENT

-191—

M-

IN ACCOUNT WITH

F. A. WILLIAMS & CO.

BCXDKS 1217 Printing House Sq., Philadelphia, Pa.

Fig. 60.—Statement set According to Layout in Fig. 58.

F. A. Williams, Prcs. C. W. Brown, Vice-Pres, John Adams, Sec-Treas.

F. A. WILLIAMS & CO.

1217 Printing House Square

BOOKS Philadelphia, Pennsylvania.

STATEMENT OF ACCOUNT OF

Fig. 61.—Statement Set According to Layout in Fig. 59.

Digitized by VjOOQiC

rule for this, but a study of well-balanced letterheads shows this to be good practice.

123. Layouts. —Figs. 58 and 59 show two layouts for a statement heading, one for a ruled sheet the other for an outlook envelope. Figs. 60 and 61 show them in type. When planning a job for an outlook envelope, remember that the line separating the heading from the body of the job serves as a guide for folding the sheet so that it will fit the envelope. Be sure to place it in the proper position. As nearly all office stationery is now written on a typewriter, if guide-lines are used for the address they should be the distance apart of two typewriter lines. It is much better, however, to omit them. When setting billheads, if there are printed lines alongside of the outlook, they should be so positioned that they may be typewritten at the same time that the address is written. See Fig. 62.

F, A.Williams & Co.

Books 0/All Rinds

1217 PRINTING HOUSB SQUARB

PHILADELPHIA

Fig. 63.—An Envelope Comer.

Figs. 63, 64, and 65 show settings of an envelope comer, a business card, and a label. It is frequently advisable to keep all the office stationery of a firm in harmony, and for that reason one style of type has been used throughout. Frequently the label will appear to better advantage if set in bolder type.

Before imdertaking the settmg of any job the copy should be analyzed, and a layout roughly sketched so as to get some idea of the finished product.

Digitized by VjOOQiC

r~^

6

I

w

Digitized by VjOOQiC

PRINTING

F. A. WILLIAMS & CO.

1217 PRINTING HOUSE SQUARE PHILADELPHIA

RBPRBSBNTBD BT

JAMBS B. SMEDLBY

BOOKS

Fig. 64.—^A Business Card.

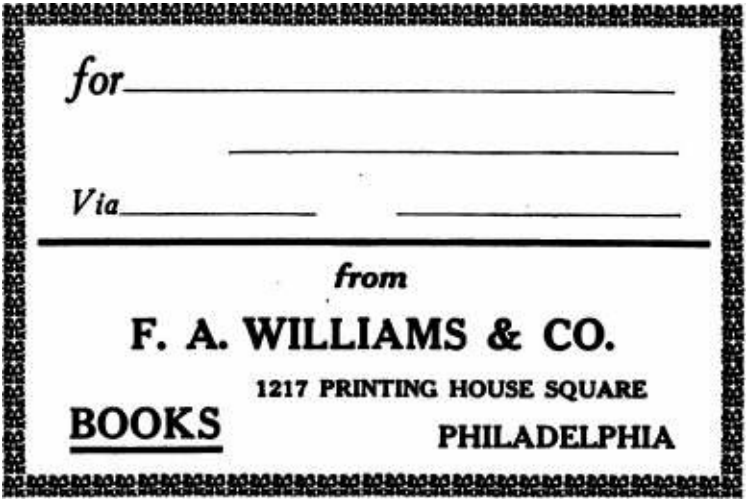

Fig. 65.— a Label

124. Specimens. —^The specimens on the following pages have been chosen for criticism, and their merits or demerits pointed out. The student should follow closely the criticisms and the reset specimens given in the current numbers of the various typographical magazines, and especially the department devoted to apprentices in "The Inland Printer." He will find therein much helpful suggestion.

Digitized by VjOOQ iC

Cturcl) eiaslsi >i>

J^omtatit <(IIa«««

Mtmovialsi -h 4<

^ttovatibtWiovk in ;fabrtctf + +

Moiaitsi'i' 4< 4*

Mural Ij^aivcUngfi

tBabUti 4< 4< 4*

Fig. 66.—Cover for a Book of Testimoniab. Neat, dainty, appropriate

Digitized byCjOOQlC

PRINTING

Fig. (fj» —Envelope Corners. No. I. A professional envelope. ^ No. 2. Unusual, but cffeci Improperly spaced. No. 4. Respacing of No. 3. L/igitized by

^oo^^e

SETTING A JOB

129

Fig. 68.—Envelope Corners. No. I. As originally set. Too many short lines to make a pleasing^group. j Nos. 2, 3. and 4 show rcsettings. L^gitized by VjUOQ iC

Statxmxnts Bxkdxrkd Mokthlt

8018 Chestnut Stbebt

Philadblphi A, 191

M..

SAMXTEI. D. RISL.EY, M.I>.

For Professional Services

Received Patmbnt

CONSULTING HOURS

0 A.M.—1 P.K. AND BT APPOrNTlCBNT

Fig. 6q.—A Professional Statement

Digitized by VjOOQiC

WILLIAM A. GRAY THOMAS E. COGAN

ANNOUNCE THE REMOVAL. OF THEIR LAW OFFICES FROM 1011 CHESTNUT STREET TO

WEST END TRUST BUILDING

BROAD ABOVE CHESTNUT STREET. WEST SIDE ROOMS 809. 810. 811

BOTH TELEPHONES AUGUST 1. 1917

Fig. 70 —Professional Removal Notices

Digitized by VjOOQiC

PRINTING

Fig. 71.—Unique Treatment of a Menu.

Showing front cover and one inside page. The beauty of the original cannot be shown in black and white. The cover was in brown ink on on3rx paper, and the circle was embossed. The inside page was im black and red on white antiqu^aper.

SETTING A JOB

133

'T TIS lamp am I

To shine where He shall say: And lamps are not for sunny rooms,

Nor for the light of day: But for dark places of the earth, Where shame and wrong and crime have birth; Or for the murky twilight gray, Where wandering sheep have gone aftray; Or where the light of faith grows dim And souls are groping after Him; And sometimes, a flame,

Clear shining through the night. So bright we do not see the lamp.

But only see the light. So may I shine—^HIs light the flame — That men may glorify His name."

Fig. 72.— a Motto Card,

Digitized by VjOOQiC

Fig. 73.—Plain, Dignified Cover for an Invitation. Original with blind embossed border, and with type in olive green, on fabric^ finished deckel-edged paper. Type in Pabst, which is symbQlfc of Franklin's time.

Recital

by the Pupils of Louise De Ginther, at her studio, Monday Evening, April lOth

Fig. 74.—A Well-balanced Page.

Type and ornament especially appropriate. Shape of the job ,fSpi|V,li%i55@)n@Q[^ with the shape of the page. Contrast this with the job on page 136. ^

Hiawatha Academy

55 MINNEHAHA STREET, HIAWATHA, KANSAS

Fig. 75.—The shape of this job is not in harmony with the shape of the page. Contrast it with the resetting on opposite page, and also with job on page 135. ^

SETTING A JOB

137

Fig. 76.—The double-rule border here gives the page a finished appearance. The shape of the job conforms to the shape ofytfeej>ag;ej,^^^ebi^ producing shape harmony. ^

PROCEEDINGS

OF THE SEVENTEENTH ANNUAL MEETING OF THE MINNESOTA TRADE ASSOCIATION, HELD IN MINNEAPOLIS, JUNE 17-18-19,1909

Fig. 77.—An Unbalanced Page. The general effect of the mass of matter is above the optical 6e»t^/^€^H^ is not enough margin between the rule border and the job. See opposite page.

SETTING A JOB

139

PROCEEDINGS

OF THE SEVENTEENTH ANNUAL MEETING OF THE MINNESOTA TRADE ASSOCIATION, HELD IN MINNEAPOLIS, JUNE 17-18-19, 1909

Fig.. 78.— a Well-balanced Page. Type matter with plenty ol white space around it is always much eader to rert[^ than when jammed against a border. Contrast this with job on opposite page. O

QUESTIONS ON CHAPTER VIII

1. How do we detennine from an order-blank which way the type matter is to be set ?

2. What is the usual order of importance in a piece of office stationery ?

3. What is a layout ?

4. Why should layouts always be drawn full size ?

5. What is an outlook envelope ?

6. What advantages are there in using an outlook envelope ?

7. What special care is necessary in setting a job to be enclosed in an outlook envelope?

8. If the top line of a letterhead is a subordinate one, at what distance from the top of the sheet is it usually placed ?

9. At what distance from the top of a letter sheet is the main line usually placed ?

10. If a letterhead b made up of short lines grouped around a center, should it have more or less top margin than one consisting of long lines similarly grouped ?

Digitized by VjOOQiC

CHAPTER IX SETTING TABLES AND OTHER INTRICATE MATTER

125. Ability Required. —It has already been stated that one

who aspires to be a really good job compositor should possess both mechanical ability and artistic taste. Unfortunately, many engaged in the printing business do not possess these requirements. Some are artists, but can not put a job together so that it will "lift"; others are capable of work that is perfect mechanically but lack the artistic touch. In setting tabular matter there is greater need for mechanical skill than for art training. Here, if anywhere, the work must be mechanically perfect. The artisan must be thorough in his work, must possess ingenuity, and must be able to determine at a glance the best way to set a particular job, for hardly any two are exactly alike.

126. Jobs Containing Rules. —Fig. 79 illustrates a job made up of rules with a heading to each colimm. If there are but a few sheets to be printed, it is sometimes cheaper to have them ruled by a paper-ruler, and then print in the headings. If a great number are required, the job should be electrotyped and more than one sheet printed at a time. Electrotypes may be obtained from a type form or from a wax-engraving. There are three methods of getting the form into type—^by the Typo-tabular System, by monotyping, and by the regular method of hand setting.

127. The Typotabular System.— The American Type Foimders Company has devised a plan for composing tabular or blank work which is called the Typotabular System. This system consists essentially of special type, rules, and a mass of units called typotabular squares, cast on

six-point body, the top

Digitized by VjOOQiC

id) Wax-engraving.

Fig. 79.—Showing a Rule Job by Different Methods of Setting.^

of each square being in the form of a four-sided pyramid. When these units are assembled, V-shaped channels are formed into which rules can easily be slipped. The lengths of the horizontal rules are all multiples of six points. Any distance desired between the lines can readily be obtained by combinations of rules of different thickness, one-, two-, three-, and four-point side-bevel rule being used. By using two-point parallel rule or one-point center-face rule between the columns, the horizontal rules come so close to the vertical rules that the slight gap is scarcely perceptible. The type used in this system is cast to unit width so as to be self-spacing.

8 Points xo Points X2 Points 14 Points

fl

4

5

AAM

&1

x6 Points

x8 Points

bh

AAA M

Showing use of rules of different tliickiiess with Typotabular units. The diagram, beginning with 8 points, shows graduation by 2 points, viz.: 8, 10, 12, 14, 16, and 18 points, by the use of 2- and 4-point side-face rules. If intermediate ruling is necessary, 7, 13, 19. 25, 31 points, etc., can be made with i-point rule, and 9. 12, I5f 18, 21, 24. 27, 30, 33. etc., can be made with 3-point side-face rule.

Fig. 80.—^Typotabular Method of Securing Definite Number of Points Between Lines.

When two-point center-face rule is used between columns in tables, the gap is distinctly noticeable. When head rules abut column rules, side-bevel rules should be used, so that the face of the head rule will join the end of the column rule.

128. Hand-set Ruled Blanks.— The first step in setting a ruled blank is to examine the copy and cast it off in column form, allotting a size nearest to that shown in copy, but making its width a multiple of six points. Mark each column width on the copy. Total the widths of the columns and the rules between

Digitized by VjOOQiC

to determine the full width of the table. If too much has been allotted, reduce the width of a column, choosing the one for reduction whose heading would seem to indicate that but little space is required. If a colxmin must be enlarged, place the extra space where it can be used to advantage. After the width is determined, count the nimiber of lines desired, and note the length that the table is to be. Allot a certain depth for the heading, and divide the balance of the length of the table by the number of lines required. This will give the desired space between lines.

If the oflSce is equipped with the different thicknesses of side-bevel rule mentioned under the T)rpotabular System,

the job can be put together by using these rules and regular six-

Fio. 8i.—^A Typotabular Job Ready to Slide onto the Stone.

point or twelve-point quads, as required. In fact, the method is practically the same as The Typotabular System, the only advantage possessed by the latter being that the imits are always in mass formation and that the V-shaped channels aid in the insertion of rules. The table can, therefore, be put together in much less time. If the oflSce is not so equipped (and this is usually the case), the space required must be made up by utilizing such material as is at hand. This is usually two-point rule and the average nm of quads.

If very much of this ruled work is done the oflSce should be equipped with Stephens's Multio-Hexset Quadrats. A full outfit of these consists of lengths from six-point to seventy-two-point (varying by six points), in thickness from six-point to

Digitized by VjOOQiC

thirty-six-point (varying by six points). They may be

obtained with either square or chamfered edges. The chamfered edges facilitate the insertion of rules. These quads are kept in a special case, with each size and kind in a row. When composing a table, a full-length row of the right size and thickness may be taken from the case and placed on the galley. This saves all of the time usually spent in assembling an infinite nimiber of individual quads and spaces. After the job is completed the rules are removed and the rows of quads replaced in the case. There is thus a saving of time both in composition and distribution.

In setting the job shown in Fig. 79 the first operation was to approximate the space on the copy, and then cast off the job by alloA^ing eight picas for the first column, three and one-half picas for the second colmnn, four picas for the third column, and six picas for the fourth coliunn. This combination, with the three two-point vertical rules, makes up to twenty-two picas, the width of the page. Allow one-quarter inch spaces between lines; eighteen points are approximately one-quarter of an inch. If the space could be slightly greater than one-quarter of an inch, the setting could be simplified by using eighteen-point quads and one-point rules. If the space cannot be any greater, sixteen points must be put between two-point rules.

Wh6n planning a job, the compositor should always endeavor to put it together with the smallest number of units, and to use material that is self-spacing to the measure. Do not use material that must be justified to some pica length if

some other material will fill the space without justifying. For example, in the first colmnn material is desired that is sixteen points thick and eight picas long, but a combination of eleven-point and five-point to make up sixteen should not be used as each line would have to be justified with spaces. Nor would nine-point and seven-point be used, for the same reason. Two lines of eight-point would fill the space without justifying. If this material is scarce, ten-point and six-point quads will fill the space properly, but the ten-point lines wil? need justifying.

Digitized by VjOOQiC

Twelve-point quads and two two-point leads will also suffice K nothing but quads are used in one column, and a combination of quads and leads in another, it frequently happens that the column containing leads is longer than the other. This is evidently due to the fact that leads are not as accurately made as quads, and consequently run a little thicker than they should.

The job shown in Fig. 79 may be set by making up a stick to twenty-one and a half ems and setting the job straight cross. Use eight-point quads throughout. Eight picas (96 points) equal twelve eight-point ems; three and one-half picas (42 points) equal five ems and a four-erii space; four picas (48 points) equal six ems, and six picas (72 points) equal nine ems. Set the first line by putting in twelve ems of eight-point, then five ems and a four-em space, then six ems, then nine

ems. This will just fill the Kne. Set as many lines as may be required for the whole job. Place them on a sralley. Now set the headings, but make up the stick to the different measures required. Place the headings in position at the top of the colimins, slip in the column rules of proper length, and proceed to insert the horizontal rules. Begin at the bottom of the first column. Put a rule at the bottom to support the quads. Place the first rule between the second and third rows of quads, the second rule between the fourth and fifth rows, and so on up the column. This will give sixteen points between each two-point rule. After the first column is completed, proceed with the second in the same manner; then finish the third and foiu-th columns. Place a bevel-face rule at the head and foot of the job, with the bevel turned outward in both cases. If the columns are slightly too long or too short, the discrepancy can be adjusted by altering the space in the heading. Allow at least two points for "squeeze."

129. Wax-engraving. —^An excellent imitation of rule work, and one which produces perfect joints, is obtained by a process known as wax-engraving. A metal plate is first coated with a thin layer of wax. This plate is then placed in a ruling-machine and lines of the proper width of face are ruled in the wax,

Digitized by VjOOQiC

cutting through to the metal. If any lettering is required, the type is set up and pressed into the wax, down to the metal.

After the work is approved, the wax part of the plate is built up, then dusted with plumbago, and an electrotype made and mounted.

Most of the diagrams and outline illustrations in this volimie were made by this method. A rough sketch is furnished the artist, and the size is designated. He then sketches the design in the wax and submits it for approval. After it is approved the plate is finished and mounted, as described above.

130. Monotype Method of Setting Rule Work. —^Fig. 79 (b) shows a rule job set complete by the Monotype system. The job was keyboarded exactly as shown, and the specimen composed on the caster. This is just as it came from the machine, without any attempt being made to fix the joints. Close inspection reveals the fact that it is built up of individual characters.

\\. :ii ^ ^ r ■" ^ I I = ^ ^ ^ W ^n UF^I_ = =^ N#=F=Fr = H -^h-^-r+ll-H I -11- = = = --.

FiG. 82.—Characters used in Composing Jobs by the Monotype Method.

Every character is on a six-point unit, there being no long pieces of rule in the job. The blank spaces are made up of six-point em quads.

131. Casting Off a Table. —Fig. 83 shows a table set in

eight-point, solid. The manuscript reached the printer without any designation for column size. The width of the whole table was given. Examination of the copy showed that the greatest number of figures was five, therefore there was ample room to make each column three picas wide. This accommodated a one-em quad on each side of the column of figures, and made the columns self-spacing. There are five columns three picas wide, which necessitated five two-point rules. This left six picas for

Digitized by VjOOQiC

the first column, plus two points. The matter in the first colimn was set six ems wide. After this column was in type, a two-point rule was put alongside it and the other five columns proceeded with. Inasmuch as there were no words

TABLE GIVING STOCK NUMBERS FOR DIFFERENT STYLES OF REFRIGERATORS

Name.

Arctic

Frigid.... Ice-saver.

King

Sterling,..

Style E.

14665 4750 2122

I427I 4021

6 ems

3 ems

Fig. 83.—Showing how a Table may be Made Self-spacing and Set in a Wide Measure instead of in Single, Narrow Columns.

among the figures, and it was simply a line-up of figures, the five columns three picas wide were set all at one time in a fifteen-em measure. First an em quad was put in, then the five figures, then two one-em quads (not one two-em quad, for a rule was finally to go between the two one-em quads), then five more

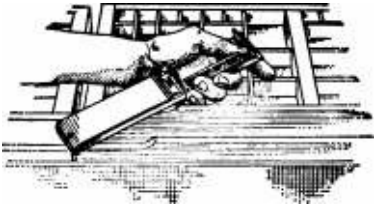

Fig. 84.—Best Way to Make up a Stick to a Narrow

figures, then two more one-em quads, and so on across the measure. All the lines were set in this way, until the table was completed. This left a dividing-line between the rows of one-em quads. The headings for the columns were set in a three-em measure. As it was impossible to get the thumb in the

Digitized by VjOOQiC

bottom of a stick made up to three picas, it was found advisable to make up the stick as shown in Fig. 84, by using a two-em piece of metal furniture, leaving a space three ems wide between it and the end of the stick. Always follow this plan when setting type in narrow measures.

After the headings were all set and properly placed and spaced, a two-point rule of proper length was slipped between each row of one-em quads. This separated the type into columns. It was now found that the table was two points short of full width. This amount was added to the first column. The rule under the heading was made eighty-six points wide (seven picas and two points). A two-point lead was placed beside the heading and one between the type and rule below the heading. The top and bottom rules were added and the table completed.

When type is new the composed matter usually comes out

according to calculation. If the type in the table shown had been old and dirty, there is a strong possibility that the two points additional would not have been required in the first column. One point might have been suflScient. When the additional space to be added to a table is very slight, or there is a great number of colimins, compositors sometimes place thin pieces of paper each side of the column rules.

Table III, page 40, shows another type of work. Here the colimins are narrow and there is so much to be gotten into the table that the columns cannot be made to multiples of pica. In this event make up to the figures. The figures are on en body, therefore make the width some multiple of the en, and use the en leader as a decimal point (one period on an en body). This makes the whole job self-spacing. Each line can be set straight across in a wide measure, and the vertical rules slipped into place after the table is set. Of course, when columns are not set to pica widths, labor-saving rules cannot be used under the headings, and rules of proper width must be cut to fit.

Whenever it is possible to do so, always set tables with narrow colimms in this manner. They can be set in half the time that

Digitized by VjOOQiC

it takes to compose them in narrow measures and then put them together.

•When leaders are used they should nm the full width of the column. (See "Glossary'* for explanation of leader.)

132. Three-point Spaces of Eight-point. —^Every font of eight-point type that is used for setting tables shoidd be equipped with spaces three points thick instead of the ordinary thick-spaces. This gives a range of spaces varying by one point. The four-em space is two points thick, the thick-space will be three points thick, and the en quad is four points thick. By combining a thick space and a four-em five points are obtained, two thick spaces equal six points, and en quad and a thick-space equal seven points, and two en quads equal eight points. If the matter is being set in a measiu-e made up to picas, and the type fills all but six points of the measure, a three-point space each side will just fill it. In fact, the use of the three-point space practically makes eight-point type self-spacing to pica measures.

133. Point-thick Spaces. —It is sometimes necessary to set a table leaded instead of solid. If the colimins are wide and an even nimiber of picas, ordinary labor-saving leads shoidd be used. If the coliunns are very narrow and it would be necessary to cut a great number of short leads, it is better to double-up spaces of the proper size and thickness. The five-em space of ten-point is two points thick, the four-em space of eight-point is two points thick, and the three-em space of six-point is two points thick. By using these in combination, a space of the proper width can usually be made up. In fact, if the job is to be leaded, this must be taken into

consideration in casting off the job and, if possible, a measure chosen that will be some multiple of these spaces. From these three spaces, by using them singly or in combination, the following widths in points can be obtained: six, eight, ten, twelve, fourteen, sixteen, eighteen, twenty, twenty-two, twenty-four, twenty-six, twenty-eight, thirty, thirty-six, etc. If the space required between lines is three points, a great nimiber of combinations may be built up by using the four-em space of twelve-point, the three-em space

Digitized by VjOOQiC

of nine-point, the three-point space of eight-point, and the en quad of six-point. If foxir points between lines is required, the thick-space of twelve-point, the en quad of eight-point, and the three-em space of six-point may be used; two of the last-named, of course, being required.

The student should make a study of the inter-relation of spaces. Quads and spaces of one size of type can frequently be used with another size when there is a scarcity of material. A two-em quad of pica is the same size as an en quad of twenty-four point. A three-em quad of eight-point is the same size as a three-em space of twenty-four point. A three-em quad of pica is the same as a three-em space of thirty-six point. A two-em quad of eighteen-point is the same as an en quad of thirty-six point. A three-em quad of six-point equals a three-em space of eighteen-point. A two-em quad of nine-point equals an en quad of eighteen-point.

The list given has not exhausted the nmnber by any means, it is merely suggestive. It serves, however, to illustrate the advantages of the point system.

134. Line-up of Figures. —^The printer is occasionally furnished copy in which the matter seems to be in tabidar form, but with the rules omitted. In other words, the copy is simply a line-up of figures. In cases of this kind there is no need to cast off the job into colmnns of any specified size. Set one full line of the type with the figures in approximately imiform position. If possible, have an even number of ems between each column, using quads for this purpose. Set all the lines straight across, making the figures line up in column form.

,, - „ Rate per Square

a% o No. of Ems per . , ^ *^ ^^ ^

Type Size. „ - C iJich at 40 Cents per

Square Inch. _. , „

Thousand Ems.

6-point . 144 -0576

8-point 81 .0324

I o-point 51. 84 .0207

i2-point 36 0144

Fig. 85.—Showing a Line-up of Figures.

Digitizejd by VjOOQiC

PRINTING

135. Setting More Than One Column in a Single Measure.

—Matter that contains two or three columns, consisting simply of a line-up of material, can frequently be set more expeditiously and accxurately in one measxure than in narrow measures and then assembled; especially is this the case if the matter be leaded. The matter below is a sample of such composition.

BRIEF LIST OF ARTICLES FOUND IN THE COMPOSING-ROOM

Fig. 86.—Showing a Line-up in Two Columns Set in One Measure.

Of course, if there is a possibility of alteration, and consequent overrunning after the job is set, it is better to set leaded matter in separate columns. But if there is no likelihood of change, it is advisable to set it as shown.

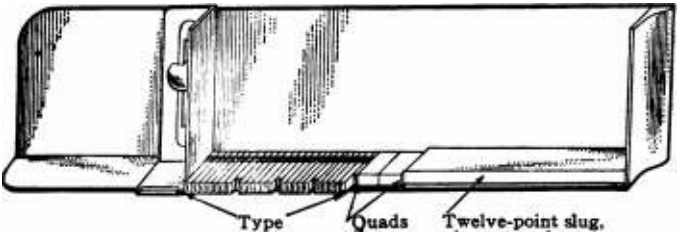

luads Twelve-point slug, eleven ems long

Fio. 87.—Setting TVpe in Two Columns in One Measure by the Use of i Twelve-point Slug.

Fig. 87 illustrates how this was done. The full measure is twenty-two ems. Each column is to be eleven ems wide. Obtain a slug or a piece of six-point or twelve-point rule eleven ems long. Set the type and put in a few quads until the line is about half filled. Put in the slug and justify the line. Remove

Digitized by VjOOQiC

the slug, set the balance of the line, and justify it. Proceed in the same manner for all the lines.

Any number of columns can be set in this manner, by using slugs of a length that will leave each column of proper

width.



XMAijoa JO 9»»a

•on lapiQ ^op«J

TOSpaq

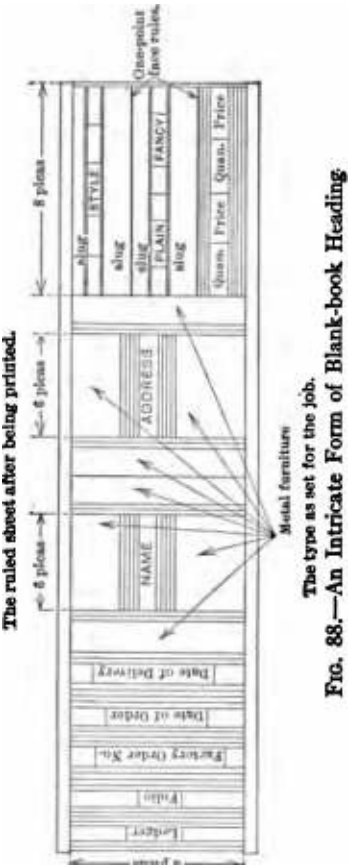

FIG. 88.—An Intricate Form of Blank-book Heading.

-nff[(I B

136. Blank-book Headings. —Fig. 88 illustrates a rather intricate form of blank-book heading, and shows how it has been put together. If possible, always obtain a ruled sheet of a job before setting it. The secret of success in setting blank-

Digitized by VjOOQiC

book headings is in allowing ample space for moving the

type to fit the ruling. Every job should be put together in such a way that it can readily be moved in every direction. Many a compositor has come to grief because he did not allow for moving the type when the job is on press. If possible, cast off the columns to picas, so as to use labor-saving material; but do not do so if it brings the colimins too close together. Better cut a few bastard leads while setting a job than run the risk of wasting time fixing it on press. If the columns are so close that there is a space of but six or eight points between them, it is better to make up the required amount with three or four leads than to have a single piece of material, for if the column needs moving the single piece will have to be removed and its equivalent made up of several pieces and inserted in its stead. It is better to put in that material when setting the job and avoid the necessity for change while on press.

The type in narrow colimins should read up the sheet. Where a heading crosses two columns, the rule beneath it is sometimes printed in, as it is expensive and rather difficult to strike it in on a ruling-machine.

The best way to handle blank-book headings is to cut a section of the ruled sheet and place it in the composing-stick and set the type to fit the raling, bearing in mind that ample allowance must be made for moving. If a sheet of the job is not available, mark off the columns on a narrow strip of paper, using the pattern sheet as a guide. The job may be set in sections, and then assembled on a galley. If a job only

covers half a sheet, there is no need to set it full width of the sheet. It is advisable, however, to set it to a measure of which you have plenty of material; say forty, fifty, or sixty picas. This will save time and trouble when locking up the job for press.

137. Setting and Registering Type to Horizontal Lines. — When setting a colimin of type matter to be registered on horizontal ruled lines, make up your measure to the nearest pica size. See that you have plenty of leads before beginning the work. If leads of the size chosen are scarce, use a size that is

Digitized by VjOOQiC

plentiful. Better to set it slightly wider than to cut material. If the column be a narrow one with nothing but figures in it, and you have plenty of room on the sheet, there is no need to set it in a narrow measxure. It is unhandy to set type in a narrow measure and time can be saved by making the measure to a convenient width. Moreover, there is greater likelihood of having leads of the wider measure. If the job is in eight-point, or in some other size that is a multiple of pica, set the measure to eight, ten, twelve, or some other even number of picas. The figures will then be self-spacing. Make an approximation of the amount of space required between the lines and put in the leads while setting.

After the column is complete, use a sheet of the ruled stock

for registering. This can be tacked to the side of a brass-lined wooden-rim galley, or it may be held in the hands. It is more convenient to tack it to the galley, as both hands are then left free. Get the first line of the type in register with the first ruled line on the sheet. Insert the required amount of space between the lines to make them all strike on the ruled lines. If the sheet is not ruled on the point system, it may be necessary to use cardboard between the lines to make them register. Usually, one-point leads will bring the lines suflSciently close for the purpose. After the horizontal lines are in register, if there is a heading, it should be put into register, and the colunm material moved so that the type lines will fall three or four points above the ruled lines. If there is an abundance of room between lines, it might even go more; but it should never be less than two points.

138. Running Type around Cuts. —^The Monotype and Linotype methods of nmning type around cuts are described in Section 188. The method by which it is done by hand is here given.

When the cut is a perfect rectangle the job is comparatively simple. If the matter is leaded, arrange to have the type of some pica width, so as to use labor-saving leads. Just how much material is to be placed between the type and the cut will

Digitized by VjOOQiC

depend on the amount of white space on the cut. There should be ^t least one pica of white space around the cut. If there is no white margin, all the space must be placed between the cut and the type If there is an abundance of white space on the cut, the type may frequently be run almost up to it. Never place the type matter against the cut, but have at least a two-point lead between so that the ends of the lines of type will not press into the wood and prevent the job from locking up properly.

If, in arranging to have the type matter set to a pica width, it is foimd that one pica size allows too much, the difficulty can be overcome by setting the type to the larger size and indenting each line sufficiently to make the margin of the proper size.

If the cut is irregular in shape, and the type must conform to the outline of the cut, the job becomes a complicated one. Each job is a problem in itself, and the method of setting calls for an exercise of ingenuity on the part of the compositor. Fig. 89 snows a job irregular in outline, and the following description tells how it is to be put together.

Pull a proof of the cut, and draw a line aroimd it, about one pica away from the edge, following the irregularity of its outline, to show where the type matter is to begin. Cut the paper to the width of the type page. Hold the proof to the light and mark the outline of both the cut and the type on the back. Cut the proof into pieces that will just fit the stick. Put

the marked sheet in the bottom of the stick and set the type on top of it, using the marked outline as a guide. Set the full lines straight across, inserting leads if the matter is leaded. Where the matter begins to run down the side of the cut, place enough quads and spaces in the stick to make up a blank space where the cut is to go and begin the type at the pencil-line. Where the margin comes between the cut and the type put a one-em quad beside the type. This will be needed when the cut is put in position. Set as much as can be gotten in the line, and justify it by spacing between the words. Set the stickful in

Digitized by VjOOQiC

this manner, making the type matter fit the penciled outline. Empty the stickful on the galley, put in the second half of the proof, and proceed with the balance. When the matter is assembled on the galley, there will be a blank space in the type matter made up of quads and conforming to the outline of the cut.

If the matter is to be electrotyped, and the original cut is to be inserted in the electrotype plate, there is no need to place it in the page with the type. If the job is to be printed from type or the cut must be placed beside the type, continue as

-Cur juLjiv

■ of I y [Hj kl !iit h r -

.vfe....-ar.^.^^^h.i..i^;;j:r^

-niDDk tp^t*

Jlau at uuU

i|UiiJ 5 a tL4?r« itloq£&iJi? of Tin; IJ'JiVi

Fig. 89.— How Type Should be Run Around a Cut Irregular in Outline. (This shows the job as printed.)

follows: place the type on a galley as shown in Fig. 90, with the head of the job toward the left-hand side. Put furniture around it and lock it up. Cut out the proof of the cut close to its edge. Place this upside down on the type matter and mark the outline of the cut on the quads with a lead-pencil. As it is physically impossible to curve a lead to fit such outlines, in cases of this kind the type must come up against the cut. If the matter is solid the quads enclosed in the penciled outline may now be removed and the cut inserted. If the matter is leaded, the leads between the lines that are alongside of the cut must be shortened. They must be long enough to prevent the

Digitized by VjOOQiC

letters from dropping down on the ends, but not long enough to bind. Obtain enough pieces of odd lengths (do not cut labor-saving material), mark the size that each is to be cut, making each long enough to reach from the cut to the end of the line, take them to the lead-cutter, and cut them all to proper size. If the lead-cutter is right beside you, they may be marked and cut one at a time, but do not waste time running a foot-race between the job and the lead-cutter. Remove a full-length lead and substitute one of proper length. This will leave all the quads loose except the one-em quads beside the type matter.

^==-^-^

r

i

Fig. 90.—Showing Type Matter as It Appears on the Galley after Insertion of the Cut.

Remove the loose quads and spaces. Slip the cut into place and put enough material above and below to justify it to page length. Now carefully place enough space between each em quad and the type to justify the line. If the em quad strikes the cut at an angle, and has a tendency to wedge the line out of plumb, insert a smaller size quad, and see that the pressure is

exerted against the end of the line not against the side of the quad. The job is now complete. Place furniture all around it, so as to support the sides, and tie it up.

139. Setting Type in Circles. —Below are shown two forms of circles—a label and a job that was cut out after printing.

Digitized by VjOOQiC

The printing of the latter is described on page 246. When type is to be placed in a circle made of brass rule the inside of the circle must be lined with leads or a slug to keep the type away from the rule. First determine the margin inside the rule and ciurve the material to fit. To do this cut a strip of stifi paper and curve it inside the rule. Mark the length that the lead or slug is to be. Cut it to size. If the office is not equipped with a curving-machine, the lead or slug may readily be curved by bending it around a mallet-handle or a shaft on a printing-press, care being taken not to bend it on the bias. Try the curve

Fig. 91.—Type Set in Circles.

inside the rule. If too long, cut it carefully so as to make a perfect fit.

There are two ways of placing a line around a circle. One is a tentative or rule-of-thumb method, the other an accurate one of determining the exact distance around the circle, setting the line in a stiqk, fastening it with gummed paper, and then curving it into place. The latter has a distinct advantage over the former in that the type is held in proper place and position. The former is the older and more frequently used method.

In the first method, after the circle is lined, determine what type is to be used, set it out of the case into a stick, with spaces between words. Place the type inside the circle, curving it to fit. When about three-fourths of the line is in place, it will be

Digitized by VjOOQiC

necessary to curve a lead to fit inside so as to hold the line in position, leaving the lead slightly longer than it will be when finished. When the lead is in place, finish the line of type, leaving it a loose fit. Expand the inside curved lead, mark the correct length, cut it to size, and force it into place. If there is room, a second cxirved lead should* be forced into place for the sake of stability.

Next set the horizontal lines, cutting leads to fit. Use slugs wherever possible, as they are firmer. When everything is in place and fitting loosely, first justify the horizontal type lines lengthwise, then force in enough material above and below the horizontal lines to wedge the inside tightly. Lastly, force enough space in the curved line to tighten it. Do not attempt to tighten the curved line imtil the inside is firm, or the curve may be forced out of shape.

The second method is the same as the first except that the curved line is assembled as follows: cut a piece of stiff paper to fit inside the lining of the rule. Determine what size type is to be used. The paper shows the outside diameter of

the line; it is necessary to find the inside diameter. The circumference of every circle is 3.1416 times its diameter. As the line nms all the way around the circle, the inside diameter will be less than the outside by twice the body size of the type. To find the inside diameter when the outside is known, multiply twice the body size in points by 3.1416 to obtain the number of points less that the inside is to be. Measure off this mmaber of points on the stiff paper, and cut it to size. Make up a stick to this measure, set and justify the line, but have a space at one end of the line. Now glue a piece of heavy manila paper to the bottom of the type. One or two thicknesses of gummed manila binding-paper is useful for this purpose. When the glue has firmJy set, the line can be curved into position in the circle, and will fit it perfectly, each letter being held in perfect position radially. The balance of the circle should be finished as already described.

The circular job. Fig. 91, shows a cutout for a taJly-card. It was mounted on a pin in the center so that it could be rotated

Digitized by VjOOQiC

and each design brought into view through a hole in the mount-iner. It was very important that each design should be equidistant from the center, and that the central point should be printed. The first step was to cut a circular hole in an old electrotype block. This was lined with a slug and the characters assembled about the circle, uniform space being

placed between them. A slug was curved to fit inside of the characters. A square block of wood was placed inside the circle and the job was justified by jamming material tightly at all points. The characters were now forced tightly into place. A proof was pulled, and the center of the circle determined. An electrotype tack was driven into the block, leaving the head

^SpDC^«ftbot:wc(?i]i tetters

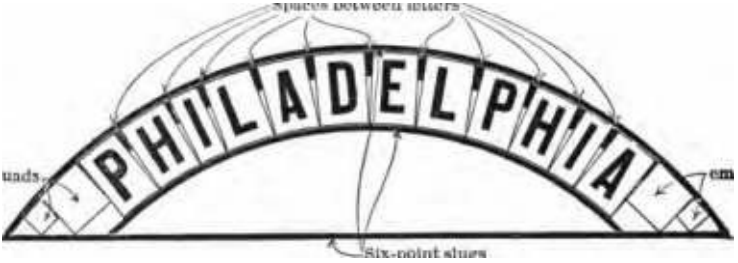

cm quads jjrN^t \T^^^ / / ^^^fctfc /jCT^/^g-7pni QiadI

SU^ptifnt slues

Fig. 92.—Showing How a Curved Line Should be Held in Position with

Spaces.

of the tack level with the face of the type. The head was then filed to a blunt point. A proof was pulled, and the center tested with a pair of calipers. It was slightly out of center, but was bent into position with pincers.

When setting letters in a curve, the tops of the letters are spread apart while the bottoms are close together; the larger the letters, the broader the gap. In order to keep the letters equidistant, it is sometimes necessary to put spaces of a smaller size at the tops of the letters. (See Fig. 92.)

140. Algebra, Genealogies, and Pedigrees. —These represent the most difiicult forms of all type composition. This treatise is too elementary to undertake fo explain this intricate

Digitized by VjOOQiC

work. The student will not be qualified to imdertake it until he has mastered perfect justification in some of its simpler forms. He should, however, read the chapter on "Difficult Composition," in DeVinne's "Modem Book Composition," pages 171 to 230, and get an insight into the subject.

QUESTIONS ON CHAPTER DC

1. What is the Typotabular System, and how is it used ?

2. Explain how a hand-set ruled blank should be cast off.

3. What are Multio-Hexset Quadrats, and how are they used ?

4. What is a wax-engraving, and how is it made ?

5. Explain the Monotype system of setting rule work.

6. How should a stick be made up when setting type in narrow measures?

7. Will the fact that type is new or old make any difference in the casting-off of a table ? If so, explain why.

8. Name the advantages derived by the use of three-point spaces of eight-point.

9. What do you understand by point-thick spaces ?

10. Tell what spaces or quads may be used as quads or spaces of another size.

11. What do you understand by a line-up of figures or type ?

12. Explain what method you would pursue in setting more than one columm in a single measure.

13. How should blank-book headings be set ?

14. Explain how you would proceed to make a columm of type matter register with the horizontal lines on a ruled sheet.

15. Is there any advantage in setting type to a narrow measure if it is possible to set it wider ?

16. Secure a piece of printed matter containing type run

around a cut, and describe in full just how you would set the job.

17. Describe a method of running type around a cut that is irregular in outline.

18. Describe how you would set a round label containing circular and horizontal type lines.

19. How would you bend leads and slugs into circular form if a bending-machine was not available ?

20. Why is it necessary to place spaces between letters at the top of some curved lines?

Digitized by VjOOQiC

LOCKING UP FORMS

141. General Principles. —Many old-time printers, evidently under the impression that any old thing is good enough, are in the habit of building up their forms as shown in Fig. 93. This pyramid style of placing furniture is wrong. Contrast Fig. 93 with Fig. 94. Notice that the only bearing the furniture

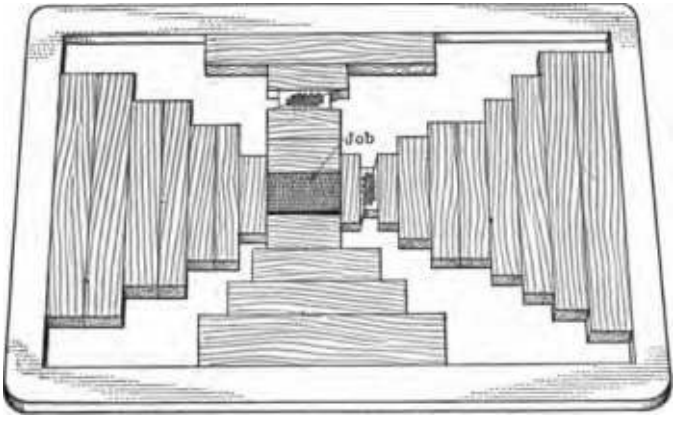

Fig. 93.—^Improper Way to Lock up a Form.

in Fig. 93 has is alongside of the short end of the job. A form put together in this manner is very apt to work loose and pull out on press. When locked up in the proper way, as shown in Fig. 94, both job and furniture are being locked up at the same time and there is no likelihood whatever of the job working loose or pulling out.

^^^ Digitized by Google

Fig. 96 shows another form properly locked up. The job, as originally set, was not the same length as the wooden furniture used in locking it up. It took but a few moments to add enough material to make it full length.

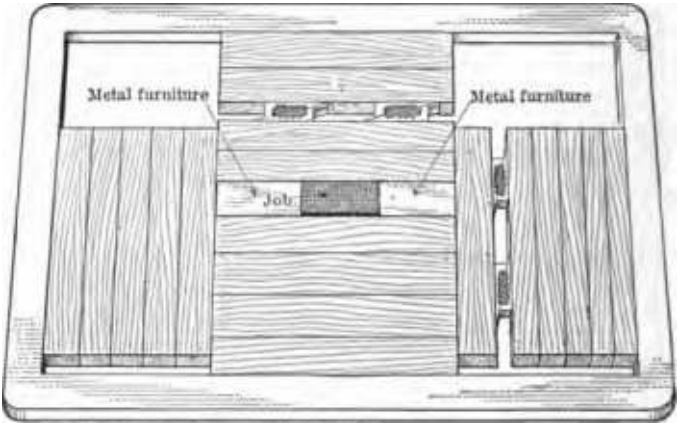

Fig. 94.—Proper Way to Lock up a Form.

142. Quoins. —Wedge-shaped devices, known as quainSy are used for locking up forms. For many years wooden quoins

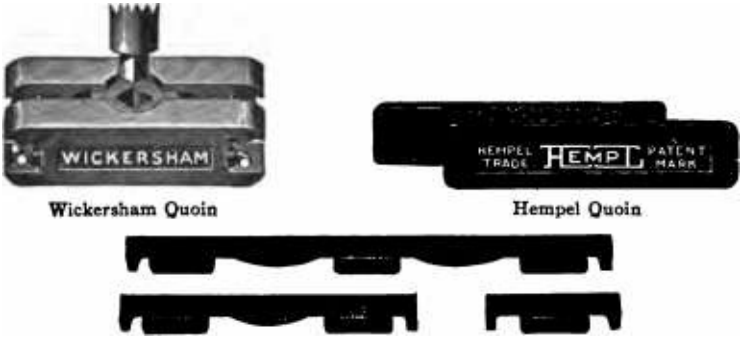

Morton Lock-up Fig. 95.—Some Standard Forms of Iron Quoins.

were the only kinds in use, being driven together with a

shooting-stick. Then came iron quoins, locked with a key. Today

Digitized by VjOOQiC

there are quoins for every imaginable purpose. Fig. 95 illustrates a few.

143. Lockmg up a Form. —In general, jobs are locked up in certain ways for convenience in handling the sheet or to secure better rolling of the form. Jobs containing rules are usually placed in the chase in such a way that the rollers do not strike the ends of the rules. (See Section 216 for method of preventing perforating-rules from cutting the rollers.) Inasmuch as it is more convenient to have the guides on the left-hand side of the tympan, jobs are usually locked up head to the left. There are special cases, however, when this is not done. Letterheads that contain but few lines are usually locked up head down. Envelope corners may be either head or foot down if the envelopes are not opened {i.e,, the flap tiuned up), always foot down if the envelope is opened.

It is always advisable to lock up a form so that the pressman can read the printed matter on the draw-sheet while running the press, for by so doing errors are frequently detected.

Fig. 96 shows how a letterhead should be locked up. It has been placed head down in order to get a better roll. The job has been set forty-five picas wide, and it is nine ems deep.

Put fifty-em furniture above and below, as shown. Add a piece of metal furniture 5X10 to build job out to fifty ems. Place enough material at the bottom of the job (one pica in this case) to build the job out to ten ems. Use nothing but fifty-em furniture, arranging the same in a neat manner. Do not have the furniture all zigzag; a good compositor is neat in everything that he does.

After the furniture is in place, put in the quoins. They should be arranged as shown in the figure. Note that the points of the quoins alongside of the form are pointing toward the lower left-hand corner. This is the point toward which you wish to drive the form. If the quoins are placed in the reverse position, they will be driving against the quoins on the other side.

Having placed the quoins in proper position, lock up the form tight enough to lift. Stand it on edge, and remove all

Digitized by VjOOQiC

dirt and grit from the bottom, using either the hand or a brush. Also brush the stone, if it seems dirty. Replace the form on the stone, loosen the quoins, arrange the furniture neatly, and push the quoins together as tightly as possible with the fingers. Then plane the form with a planer and mallet; first rubbing your hand across the face of the planer to remove

anything that may have adhered to it, and which would very likely batter the type.

The word plane means to make level. That is why the form is planed—to make it level. To see some men planing a form

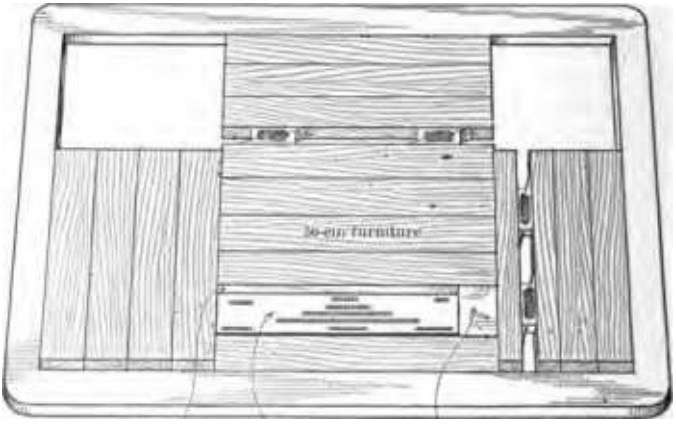

Fig. 96.—Proper Way to Lock up a Letterhead.

you might think that planing meant to drive the form into the stone. It requires but a very light tap of the mallet on the planer to drive down any letters that may be projecting. Do not drag or slide the planer over the form, but lift it when moving it from point to point over the form. If you slide it, any type that may be sticking up is apt to be broken oflF. When you replace the planer on the stone (or, better, a shelf provided for it) do not lay it on its face^ as it is apt to pick up grit.

Digitized by VjOOQiC

Every form possesses two dimensions—length and width. Every form also possesses a certain amoimt of "give" or " springiness." The way in which it has the greatest amoimt of give is the side that should be tightened first. In the letterhead in Fig. 96 we should start at the top and tighten the quoins a little with the key. This will remove the greater part of the spring. Then tighten the quoins on the side a little; then the top; then the side. In this way go over the quoins imtil the form is "tight enough." This can only be learned by experience. When the form is so tight that the letters cannot be pushed out by a fairly good pressure of the fingers, it is tight enough. Do not exert extreme pressiure in locking up, for it is comparatively easy to break a cast-iron chase.

After the form is locked up, raise it above the stone by placing something imder one edge, and try to push down the letters. After the whole form has been gone over in this manner, stand it up on one edge and rub the hand across the bottom of the form. If any letters are loose and have been pushed down, they will be detected. Do not drop the form flat on the stone after trying it for loose letters and before rubbing the hand across the bottom, as this would push the letters back in place. See that everything is tight before sending a form to press.

144. Bearers. —In many offices it is customary to use hearers in job-press forms, the popular belief being that they prevent the rollers from bearing too hard on the form. A brief inspection of rollers that have been run on bearers will

prove that the bearers do not bear off the rollers, but that they actually sink into them. Bearers are useful only under certain conditions.

145. Gudgeons. —In all types of job printing-presses the rollers are moved up and down across the face of the type. On each end of the roller-stock is a wheel, known as a gudgeon, that rolls on a track at the side of the press. This track should project 0.918 inch (type-high) from the bed of the press. The gudgeon should be exactly of the same diameter as the roller. The roller-stock should be keyed to the gudgeon.

Digitized by VjOOQiC

When these perfect conditions prevail, if the rollers are not bearing firmly enough on the form, all that is necessary is to put a few sheets of paper back of the form; if the rollers are bearing too firmly on the form, glue a strip of cardboard on the track. In the Victoria Press the rollers are raised or lowered by moving the whole track with an adjusting-screw.

If the rollers and gudgeons are not exactly of the same diameter, the one of greater diameter will roll farther than the other. For example, suppose that the circmnference of the roller is six inches and that of the gudgeons only five and one-half inches, what becomes of the other half inch? The gudgeons in rolling are rotating the rollers, both making one revolution in the same period of time; the circumference of

the roller, however, moving six inches while the gudgeons only move five and one-half inches. That half inch is gained in the five and one-half inches, the roller sliding over the form instead of rolling. The same thing will happen if the rollers are smaller than the gudgeons. In this event, it will slip in the opposite direction. The contact of the roller on the form should be a rolling contact, not a sliding one.

If the roller is sliding instead of rolling, it will fill up the type, and produce smeary prints. It will also wear out the roUer-pins, which finally break, leaving the roller free to revolve in the gudgeons.

It is only when rollers are loose in the gudgeons that it is advisable to use roUer-bearers, as they will cause the rollers to roll over the form and not drag; but they will not hear off the rollers from the form.

There are adaptable and adjustable gudgeons on the market, so devised that the pressman may always have them of proper diameter for his rollers.

146. Lockmg Up Register Jobs. —^While there are devices made especially for registering jobs without unlocking the forms, every office is not equipped with such devices. When imposing a form that may have to be moved to get it into register, always place about six two-point leads at the side away from the quoins. Then, if it is necessary to move the job, it can be done without

Digitized by VjOOQiC

disturbing the furniture. If the form be made up of plates, use leads or furniture at each of the four comers, as shown in Fig. 97. This will permit of twisting the plates if necessary.

When a register job is first locked up for press, a chalk-mark should be made across each quoin in such a way that it marks the quoin and the furniture that it abuts. Every time the form is unlocked and a change made, exactly the same amount of material should be put back into the form, and the quoins and furniture put into their original positions. When the quoins

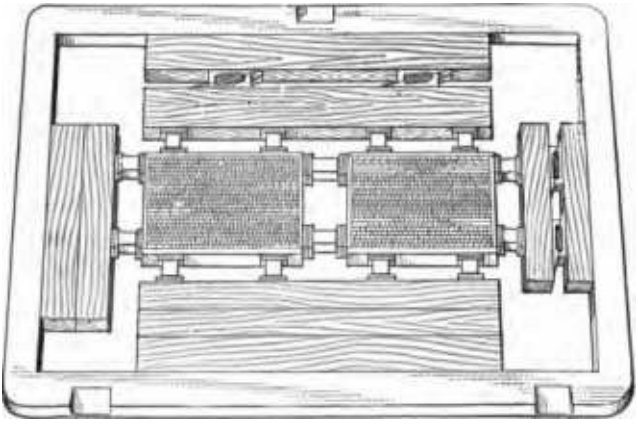

Fig. 97.—Method of Locking up a Form so that it May be Easily Moved*

are tightened, the chalk-marks will all come into perfect alignment. When this occurs the form is locked up exactly as it was in the first instance. In no other way can you be assured that such is the case. It is a very easy matter to exert more force at one time than at another.

147. Locking-quoins.—^There are several locking-qtioins on the market, operated with a spring-actuated catch that engages in a rack on the quoin. After the quoin is tightened the catch is released, when it engages in the rack, and the quoin is locked. It is impossible for the quoin to sUd.

Digitized by VjOOQiC

When running register jobs, pressmen frequently resort to the expedient of plugging the quoins with a wad of moistened paper, which, when dry, holds them firmly in place.

148. Jobs with Rules. —^Jobs containing rules should, if possible, be locked up in such a way that the rollers will not strike against the ends of sharp rules, for they may cut the rollers. Forms are frequently locked up at an angle, using wedge-shaped furniture, to prevent any cutting of the rollers.

Perforating-rule that is locked up with a job and imposed so that it is vertical in the chase, should run oflF the sheet, and should have a two-point or three-point face-rule at the top and bottom. This will prevent the rule from cutting the rollers. The marking of the tympan may be prevented by the

use of a frisket. (See Section 212.)

Fig. 98 shows the proper method of locking up the two sections of the nile job shown in Fig. 51 on page 109. The guide-edge is marked. Observe that the top and bottom horizontal rules are printed in the form with the vertical rides. This should always be done. It prevents the rollers from striking the sharp ends, and also guarantees a perfect joint. K the siheet does vary a little it will not show a gap between the vertical and horizontal rules, as it undoubtedly would do if all the vertical rules were in one section and all the horizontal ones were in the other.

149. Allowance for Squeeze. —It is almost impossible for a compositor to set a job inside of a border and squeeze it together so tightly that it will look all right on the galley and still make a perfect joint when locked up. Some allowance must be made for squeeze. If the job contains many lines of type and much spacing material, it will have more springiness than if put together with considerable solid furniture. The job should be squeezed together as tightly as possible and then about two points more put in to allow for squeeze. If very springy, allow four points.

150. Troublesome Comers. —^When locking up a job with a rule border, make a perfect fit of the corner away from the

Digitized by VjOOQiC

y^ Job to fed to this gqfde flwt, then turned end for end.

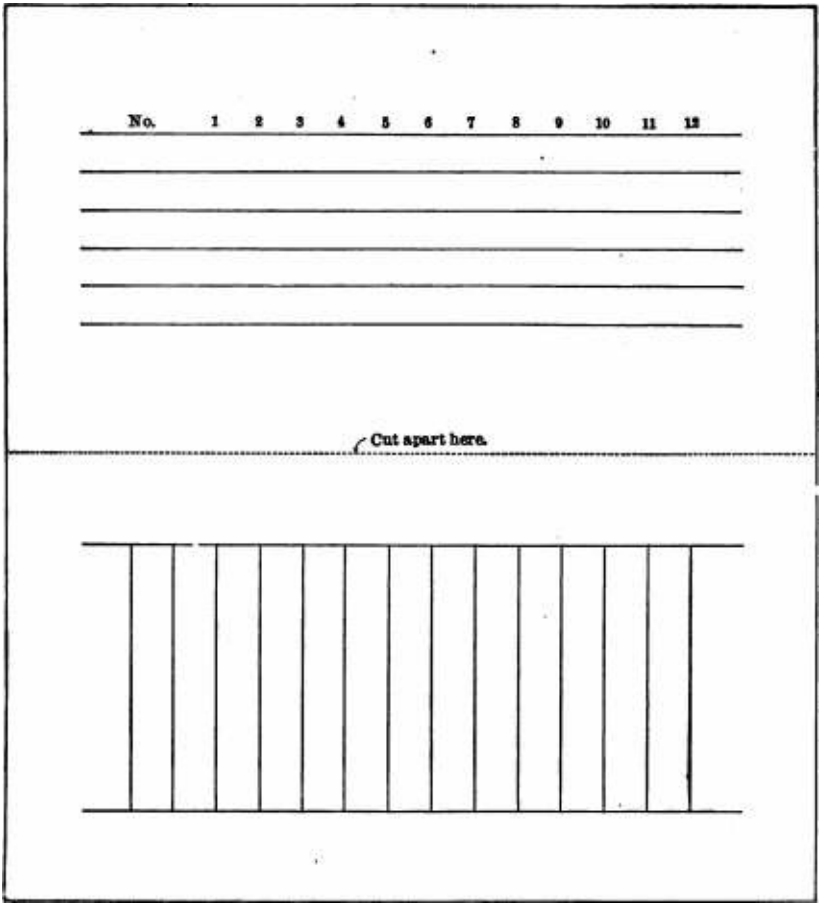

^ After the flrgt Impression this edge Is fed to the guide.

Fig. 98.—Showing Lock-up of a Rule Form in Two Sections, to be Printed at One Time. When the sheet is turned end for end the two sections will overlap, thus producing two copies.

Digitized by VjOOQiC

quoins by pushing the rules together with a piece of wooden furniture. Never use a bodkin for this purpose, as it may batter the end of the rule and prevent a perfect joint. Now lock up the form carefully until all the corners come together perfectly. Use a try-square to see if the ends and sides are at right angles.

If a corner should prove a little refractory and persist in gaping open, a little beeswax melted into the joint by the heat of a lighted match may overcome the difficulty. After the wax hardens, trim oflF the surplus. Tinfoil placed in the open joint, and the surplus trimmed off, has also proved effective.

151. Squaring the Form. —Every form with a border, or which has rules, either horizontal or vertical, or any element whatever that would mar the appearance of the work if it was not at right angles with the sides of the paper, should be tested with a try-square before sending the form to press. This will frequently save a useless waste of time in the pressroom, for, if the job is not square, it will be returned to the composing-room for correction. Learn to do things correctly. It is the doing of the little things correctly that

constitutes perfection.

152. Wooden Furniture. —No matter how carefully wooden furniture is kept, it will shrink, and some of it will warp. Warped furniture is fit only for kindling-wood. Throw it cway; it invites trouble, and wastes time.

When using wooden furniture to make up forms for cylindei presses be sure that the pieces are all of the same width. Some pieces shrink so badly as to be unfit for this purpose. They are all right for job forms, but are not to be relied on for making up margins.

Four-em wooden furniture has a groove running the length of one side: this is the top, use it this side up. It is almost, but not quite, square. Therefore if turned on its side it does not measure four picas.

Never use water on wooden furniture.

153. Riding of Forms. —When locking up a small form, it will sometimes be noticed that it has a tendency to "ride"—-

Digitized by VjOOQiC

that is, the pressure causes the matter to bulge up in the

center. Unlock the form and see if anything has dropped down between the type and the furniture. If the cause is not discovered in this way, take out a few of the pieces of furniture and place them side by side on the stone and see if a gap is visible between them at the bottom. See Fig. 99. Sometimes the furniture is slightly wider at one point than at another. If this proves to be the case, either insert other furniture, or turn one or two of the sloping pieces upside down, when they will counteract the slope of the others, and the form will lock up without riding.

The riding of forms on cylinder, presses is also a frequent cause of trouble. This is usually due to the fact that the

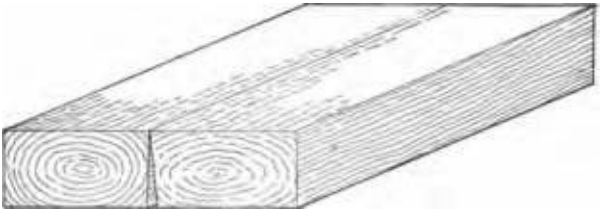

Fig. 99.—Showing Two Pieces of Warped Wooden Furniture, pressure is applied by the quoins the furniture will ride.

When

material is wider at the top than at the bottom. In locking up, the form is slightly raised. As the cylinder goes over the form, the type is pushed down, but not the furniture. After the cylinder has passed, the type comes up again, and brings the

furnitiure with it. This continues until the furniture is high enough to be inked by the rollers and leave an impression on the sheet, thus spoiling the sheet.

To overcome this trouble, unlock the form and see if anything is binding. If not, then examine the furniture, and reverse a few pieces as directed above. If this does not correct the trouble, cut long strips of thin cardboard about one pica wide and drop them down alongside of the material that is riding. This will usually rectify the trouble. As a last resort,

Digitized by VjOOQiC

pressmen are sometimes compelled to drive small nails into the furniture to keep other material from riding.

QUESTIONS ON CHAPTER X

1. Describe the proper way to lock up a form.

2. Why is the pyramid style an improper way of locking up a form ?

3. What is the meaning of the word " Quoin " ?

4. Name the dififerent quoins with which you are familiar.

5. Explain the action of a quoin.

6. How should quoins be placed in a fonn ?

7. When locking up a job containing rules, how should the job be placed in the form ?

8. Why should a job be so placed in a chase that the pressman can read the printed matter on the tympan ?

9. Why should a planer never be dragged over the face of a form ?

10. Why should a planer never be laid on its face ?

11. Why is it important to begin to tighten the quoins in a form at some specified place ?

12. What will happen if the tightening of quoins is not begun at the right place ?

13. How would you test a form to make sure that it is tight ?

14. What is a roller-bearer ? Of what use is it ?

15. What is a gudgeon ?

16. Explain fully why it is so important to have rollers and gudgeons of exactly the same diameter.

17. If the rollers were pressing too heavily on the form, how would you overcome the difficulty ?

18. If the rollers and form were not in contact, how would

you bring them together?

19. How should register jobs be locked up ?

20. If the comers of a rule job did not come together, how would you rectify the matter ?

21. What expedient do pressmen sometimes resort to to prevent quoins from slipping ?

22. Why is it important to make a chalk-mark across quoins and furniture after a register job is locked up for press ?

23. When a rule job consisting of horizontal and vertical rules is made up into two forms, why is it important to have the top and bottom horizontal rules placed with the vertical rules ?

24. What do you understand by " allowance for squeeze " ?

Digitized by VjOOQiC

25. "What difficulties are likely to be encountered if warped wooden furniture is used in making up a form ?

26. Why is four-em wooden furniture marked with a groove along one side?

27. Which is better for making up margins in forms, wooden or metal furniture? Tell why.

28. If a form was ** riding " on press, what would you surmise was causing the trouble?

Digitized by VjOOQiC

IMPOSITION

154. Placing Pages on the Imposing-stone. —Imposition is the name given to that branch of printing which has to do with the proper placing of pages on the imposing-stone so that when the pages are printed on the sheet, and the sheet folded, the pages of the book wiU open out consecutively. A moment's thought wiU reveal the fact that the pages cannot be laid out on the stone side by side in regular sequence and be in proper position for a folded sheet. Pages that back each other must be at opposite parts of the form.

There are two ways of getting the proper pages to back up. First, by printing a form on one side of the sheet then turning it over and backing it up with the same form. This is called a '*work-and-tum form." The sheet is cut in half, furnishing two copies. Second, by printing a certain number of pages on one side of the sheet then backing it up with another form. This is called working "sheetwise," and requires two forms to produce one printed sheet.

If a sheet of paper (say 9X12 inches) is folded once (to 6X9 inches) it wiU make two leaves, or four pages. If it is desired to bind up a number of pages into a book, either by

sewing or by stitching through the back (saddle-stitched), the number of pages in a form must be in multiples of four. That is to say, the form must consist of four, eight, twelve, sixteen, twenty, twenty-four, thirty-two, sixty-four, or more pages.

If the job is to be wired through the side other combinations of pages may be made up, but such combinations are so unusual that a description would tend to confuse rather than aid the beginner.

Digitized by VjOOQiC

Inserts consisting of single leaves are glued into sewed books, but they may be wired into books that are stitched on the side.

155. Hand- and Machine-folding. —^The first question asked by the compositor when he is given a form to impose should be whether the sheet is to be hand-folded or machine-folded, because the lay of form for hand-folding is not the same as for machine-folding, nor is the lay for machine-folding the same for all machines. If but a few himdred copies are to be furnished, it is a foregone conclusion that the job is to be folded by hand; if a great number of copies are required, it is equally certain that the job will be folded on a machine. If there is a question as to what machine is to be used, the compositor should consult the bookbinder.

156. Margins. —Whenever two or more pages are printed together, the question of margins must be taken into consideration. If the job to be imposed is a circular, and the sheet is simply to be cut apart, and not to be bound and trinmied, the margins wiU be made up to the finished size. If the sheets are to be trimmed after printing', allowance must be made for trimming. The majority of books are trimmed aroimd three sides— top, front, and bottom. One-quarter inch is a fair allowance for trim, but this is not always possible. It is frequently necessary to do with less in order to get a job out of a sheet of paper of stock size.

157. Determining Margins. —Fig. 100 shows the proper method of determining margins. Assuming that two pages are to be printed, that the finished size is to be six inches, and that the pages are of the same size, the distance from the edge of one page to the edge of the other page should be made just six inches. If the job is a circular, fold a sheet of the stock in half, and make the distance between the edges the same as the folded sheet. (Fig. loi.) When the guides are properly set, each page will be in the center.

If the pages are of unequal size, mark off the center of each page, and make all necessary measurements from the centers instead of from edge to edge. (Fig. 102.)

Digitized by VjOOQiC

158. Determining the Lay of a Form. —^While diagrams are usually available for reference, so that the compositor may

111!

6 0 7 i 6 10 n iq

Fig. 100.—Making up Margins to Given Dimensions.

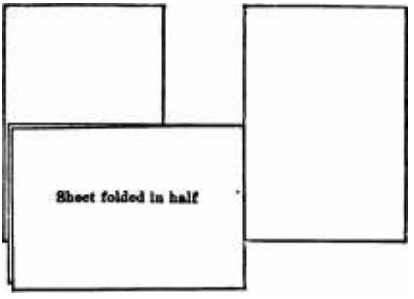

Fig. ioi. —Making up Margins to Half of Sheet

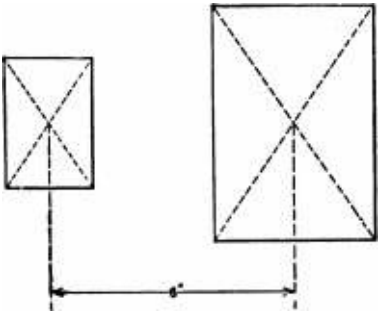

Fig. 102.—Determining Margins when Pages are of Unequal Size.

verify his work, it is advisable that he should know how to mark a dummy form and determine the lay of the pages. Inasmuch

Digitized by VjOOQiC

as the tj^pe is in reverse of the printed sheet, it follows that pages printed to the right of the sheet must be imposed to the left of the form. To determine the lay of a sixteen-page form, fold a sheet of paper, say 8X12 inches, over and over as shown

isT

Fir«t fold here

Fig. 103.—Showing Successive Foldings to Produce a Dummy.

in Fig. 103 until finally the size 2X3 inches is obtained. This will produce a dummy form.

As the form is to be worked and turned, folios are to be marked on only one side of the sheet. To get the folios on the

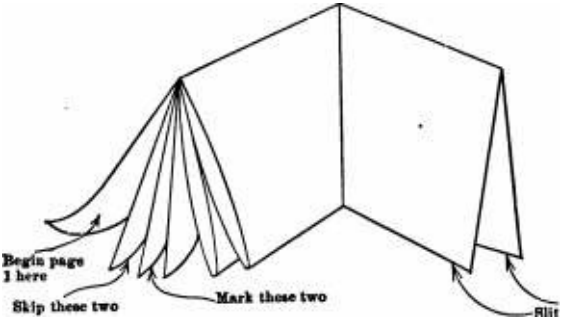

Slip these two

Slit sheets here, so that folios may be marked on proper puges.

Fig. 104.—Showing a Folded Dummy with Proper Places to Mark Folios.

dununy so as to show the proper position on the stone, mark page I on the inside of the first leaf—in reality, what would be page 2 of a printed sheet. See Fig. 104. On what would be page 3 mark folio 2. Now skip the next two pages, for they will be on the other side of the sheet when it is opened out. Now

Digitized by VjOOQiC

mark pages 3 and 4; then skip two pages and mark the next two. In this way go through the dummy, kipping two pages,

marking the next two. After the first eight have been marked, it will be f-und that the folded leaves will have to be slit at the lower corners so that the folios may be marked in proper positions. Mark them.

Now open out the sheet. If the marking has been properly done, the folios will all be on one side of the sheet, and in the positions in which the pages should be placed on the stone.

^g°*

Allow trim aU ng this edge

Allow trim on b(th sets of pages

t ^Fold

Allow trim al ing this edere

Gripper-edge. Fig. 105.—Diagram Showing Various Parts of a Form.

Compare with the lay of the form shown in Fig. 105. The lay of any form may be determined in this way.

Some compositors fold the sheet as described, and instead of marking the pages by beginning on the first inside page (page 2), they begin on the outside on page i, and, marking two and skipping two, go through the dummy. This places the pages

as they will be printed on the sheet, not as they should be on the stone. The first method is to be preferred, as it is sometimes puzzling to reverse the pages from the printed sheet.

Digitized by VjOOQiC

If the job is to be folded on a machine, it is better to obtain a dummy from the binder, for some of the forms have to be laid inside out.

159. Various Parts of a Form. —In order that the terms used in imposition may be fully comprehended. Fig. 105 and the accompanying explanation are here given. The fprm shown is a regular sixteen, and is to be folded by hand.

The point marked cui is where the sheet will be cut apart, thus making two copies.

The point msLikedfold is where the first fold will be made.

Trim is to be allowed in every place but the back, which is to be made up to the trimmed size.

It will be observed that the pages are all imposed head to head a,nd foot to foot. This is imperative; they will not fold properly if placed in any other way.

The gripper-edge is the edge fed to the guides. As the sheet will be turned right and left on the press, the same edge

always comes to the grippers, which are the fingers that hold the sheet to the cylinder.

The page numbers are called folios.

Notice that pages i and 16, 2 and 15,3 and 14,4 and 13, etc., come back to back. Notice, also, that the sum of the folios of each of these pairs totals 17, which is one more than the total munber of pages. This prevails for every kind of form where the pages are bound into a book. If it were a 32-page form, and the folios ran from i to 32, each pair of. pages would total 33.

The form shown is a work-and-turnform. If these same pages were to be worked in two forms (sheetwise), the pages would be imposed exactly as shown, but the right half would constitute one form and the left half the other. If worked sheetwise the right-hand edge becomes the gripper-edge for the right half of the form, and the left-hand edge becomes the gripper-edge for the left half of the form. This seems almost obvious, for page 2 must back up page i, consequently the edges named must be run to the guides. The lowest folio in any form should be run toward the grippers.

Digitized by VjOOQiC

PRINTING

If a sheetwise form is being imposed, the pages which go in

each half of the form may be determined by placing the entire nimiber in a row and cancelling each alternate two, beginning with page 2: thus

1^^45^;89lOVl 1213)4J516

From this we determine that pages i, 4, 5, 8, 9, 12, 13, and 16 go in one form, and pages 2, 3, 6, 7, 10, 11, 14, and 15 go in the other. Compare with F*ig. 105.

It will be noticed that the two center pages of the form (8 and 9) come head to head with the two outside pages (i and t6). This prevails in all forms, regardless of the number of pages. (See Fig. 106.)

D

D

9 8

□ D

n D

6 91

D D

D D

U D

D D

9Z

D

D

Fig. 106.—Showing How the Inside and Outside Pages of Various Forms Come Together.

In every pair of pages, if the foot of each page is toward you, the uneven folio is always to tho left; if the heads are toward you, the uneven folio is on the right. (See Fig. 106.)

160. Imposing the Form. —^The sixteen-page form is a convenient one to use as an illustration of the proper method of imposing forms, and the statements which follow apply to such a form.

Before placing the pages on the stone, see that it is perfectly clean. Arrange the pages as shown in Fig. 107. Obtain a chase (see Section 172) large enough to euclo§e the form and

Digitized by VjOOQiC

Still allow room for the quoins. If the chase is one that just fits the bed of the press, make certain that the type does not come outside of the dead-line on the press. There is a line marked on the bed of every cylinder press, known as the deadline or gripper-line. If the form is placed too close to the edge of the chase and comes beyond the dead-line, the grippers wiU strike the type and batter it, and perhaps mash the grippers. Every pressman has (or should have) a gripper-gauge. The

^‿^

X'or iH picM

X bar, OP l'

X or 4>i(picas

3 S or 12 pica*

I ^ .0

I

-h

-»ir—^

Fig. 107.—Diagram Showing Make-up of a Form.

type must be placed far enough from the edge of the chase to avoid hitting the grippers. To accomplish this it is sometimes necessary to place the type nearer to the long bar on one side than on the other. Determine the proper distance with the gripper-gauge.

The top of every cylinder chase is marked in some way to distinguish it. If the chase has shifting bars, it is important to know the top, because the bars are always put in from the top. They slide into dovetail mortices, and tg^per from top to bottom.

Digitized by VjOOQiC

When removing a bar, always tap on it from the bottom. To strike it on the top would wedge it more firnJy into the mortice.

When chase-bars become loose from constant shifting, it is sometimes necessary to turn the chase upside down to prevent the bars from "riding," or working up.

Where much locking up of cylinder forms is done, the office is equipped with an abimdance of furniture of various widths and lengths, so that combinations of any size may readily be made. If the office is not so equipped, the compositor is compelled to use whatever labor-saving material may be at

hand, or else cut material to fit. Each form may, therefore, become an individual problem.

Either metal or wooden furniture may be used. Metal is accurate, but heavy; wood is light in weight, but imreliable for width, as it is liable to shrink. If wood is used, each combination should be tested before being placed in position.

Wooden furniture has less tendency to "ride" than metal. If wooden furniture is used, care should be exercised about the four-em pieces. The groove is on the top of the furniture. It will not measure four ems if turned on its side.

After the pages are properly laid, and the chase placed aroimd them, the amount of space necessary in the back should be determined.

Assimie for the sake of illustration that this job of sixteen pages is to be printed on a sheet 25X38 inches, that it will be trimmed to 6X9 inches, and that the pages of type measure 4X7 inches. The sheet after printing and folding, and before trimming, will measure 6IX9I inches. This will allow one-quarter of an inch trim on the top, front, and bottom.

Begin at page i and measure from the left-hand edge of page I to the left-hand edge of page 16. Make the distance six inches. The type is four inches wide, so a combination of material will be needed to make up to two inches, or twelve

picas. The page is seven inches long, therefore, the material to be used in the backs must not be less than forty-two picas long. It should be longer. If fifty-em pieces are the nearest

Digitized by VjOOQiC

you have, use them. Make up eight sets of the combinations twelve picas wide, and place one set in each back throughout the form.

Next, make the distance from the foot of page i to the head of page 8 exactly nine and one-half inches. This will leave two and one-half inches, or fifteen picas, as the distance between heads. The width of the page is four inches, or twenty-four picas. Make up eight combinations of metal furniture 23X15 picas. Furniture twenty-three picas wide is used so that the pages will not bind. Place the material in the eight heads throughout the form.

Now measure from the left-hand side of page i to the left-hand side of page 13. This should be twelve and one-half inches, or just half the sheet. This will leave two and one-half inches, or fifteen picas, between pages 16 and 13. Deduct the width of the bar (let us assume that it is one inch, or six picas), and place one-half of the reniaining amount on each side of the bar. This will be three-quarters of an inch, or four and one-half picas. Do not place metal furniture alongside of the bar; use a six-point reglet along with the four-em furniture.

Next measure from the foot of page i to the foot of page 7. This should measure nineteen inches, just one-half of the sheet. The same amount of material will be needed here as alongside of the other bar—four and one-half picas. Put a 4X23-em piece at the foot of each page and a six-point reglet on each side of the bar. If there should be folios at the bottom of the pages near the short bar, do not measure to the folio, but to the last line of the page. Let the folios go into the margin.

All the material has now been placed inside the form. Place wooden furniture along the outer sides of the pages and wooden fiuniture at the foot of each outside page. Place one pair of quoins at the foot of each page, and two pairs on the side of each page. Remove the strings from the four pages in one quarter-section of the chase, beginning at the page nearest the center. Finish one quarter-section before proceeding to the next. As the string is removed from each page, close the fumi-

Digitized by VjOOQiC

ture around it and push it toward the center of the chase. Wind the string carefully, as described in Section 37, unless the strings are to be returned to the maker-up for immediate use.*

After all the strings have been removed, and the pages pushed toward the center, place enough wooden furniture

between the quoins and the chase to just fill the space. Look across the heads of the pages and see if they line up. If not, put in enough material to make them do so. A long straightedge is an excellent thing for this purpose, but be sure that the two end pages are both of the proper length before testing.

The quoins should be placed so as to drive toward the bars. (See Figs. 94, 96, and 97.) Force the quoins together as tightly as possible with the fingers, plane the form, and tighten the quoins with a key. Do not tighten each quoin to the full limit at once, however, but go over the whole form, beginning at the bottoms of the pages, tightening each one a little at a time, imtil the whole form is tightly locked up. To lock a quoin to full limit at once would have a strong tendency to "spring" the bar. Do not plane the form after it is locked up. The lock-up may be tested by propping up one side of the form and trying to push the letters down with the fingers.

If a proof of the form is required, lock the form just tightly enough to prevent the letters from pulling out, and then proceed to beat off the proof as described in Section 27. Each pair of pages lying back to back throughout the form should be proved on a single sheet. Then when the proofs are lifted they may be folded together like a book.

161. Pages Out of Center. —^The description just given was for pages centered on the sheet. Quite a niunber of our best

typographical productions are imposed out of the center. Some typographers make the head and back margins the same and allot fifty per cent more margin on the outside of a page than in the back, and one himdred per cent more at the foot than at the

* If tie-up slugs have been used, there is no need to remove the strings; but allowance for the slugs must be made in the amount of material used between the pages.

Digitized by VjOOQiC

head. This means that if the margin of the page is four picas at back and head, it will be six picas on the outside and eight picas at the bottom. As each back margin is four picas the distance between backs will be eight picas. If one-quarter inch is allowed for trim, then the distance between heads must be eleven picas—eight picas for the two margins and three picas (one-half inch) for trim. After the head and back margins are in place, make the distance from page i to page 7 equal to one-half the sheet, then make the distance from page i to page 13 one-half the sheet, as described in the next section. The balance of the form is made up as described in Section 160.

The relation of margins for pages out of the center is not the same in every office, but the method described is the proper one for imposing pages with unequal margins.

162. Making Up to the Paper. —Order-blanks sometimes specify the trimmed size, and state that the form is to be made up to the paper. In this event, make up the back to the trimmed size, then fold the sheet in half, each way, and measure from page I to page 13 for the narrow way, and from page i to page 7 for the long way. Put enough material each side of the bars to just equal the size of the folded sheet.

163. Lay of Forms. —^As has been said, forms come in multiples of four. Diagrams of the four, eight, tw^elve, twenty, and twenty-four are, therefore, given in Figs. 108-114. The sixteen has already been fully explained. See also Fig. 116. The lay of a form containing any number of pages may be determined as described in Section 158, or the student may consult some more pretentious book.

Figs. 108 and 109, showing various methods of laying the four and the eight, are so obvious as not to require any detailed explanation. It wiU be observed that the long four is the same as the square four except that pages 2 and 3 have been swimg aroimd to come side by side instead of being head to head. The same thing prevails in the square eight and the long eight. The halves of the square eight are side by side instead of foot to foot as in the long eight.

Digitized by VjOOQiC

s «

DD

Orlpper-edge.

CMpper-edge.

DD DDIDD DDIDD

1 Square Four.

Long Four.

Long Pour—laid inside out.

Useful when page four is

blank.

Fig. io8. —Three Ways of Laying a Four-page Form.

f 9

DD

DD

9 e

DD

DD

7 2

"Cnn^'

rjD'

Grlpper-cdge. Grlpper-edge.

Square Eight. Long Eight.

Fig. 109.—The Square Eight and the Long Eight.

The Twelve. —^There are several W2,ys of imposing the twelve. It may be laid so as to fold without cutting, or it may be printed and then cut apart before folding, one section insetting the other. Fig. no shows a regular twelve. This sheet is folded over and over. There should be folding-marks between pages 2 and 5, and the sheet should be folded a little bit scant of the mark to avoid crimping the edge of the sheet when making the second fold. When the twelve is imposed as shown in Fig. 112 it may be cut apart and folded as a four and an eight, the eight insetting the four, or it may be folded without cutting, both outside fours being folded out instead of in. The disadvantage of this arrangement is that the sheet must be turned for the second fold; it has the advantage, however, of avoiding the crimping of the edge of the sheet.

Digitized by VjOOQiC

It will be noticed that in Figs, no, in, and 112 the same four pages always come side by side in the rows, the only dif-

Fig. 110.—Regular Twelve, Folded Over and Over.

I

DD

5 8

t 6

.DD ^DD

9 L

DD IDD

DD

8 9

DD DD

DD^

•IS

Fig. III. —Twelve Pages Worked as an Eight and a Four, the Eight to Inset the Four.

DD

7 6

01 e

DD DD

Fig. 1X2. —A Form of Twelve.

This may be folded without cutting, or it may be cut apart and folded as two forms, the eight insetting the four.

ference being in the positions of the rows. Inasmuch as the forms work and turn {tumble^ see Section 164), and are then cut

Digitized by VjOOQiC

apart, the two halves in each form could be reversed and still back up properly. In fact, any form whatever can have its halves reversed if they back each other.

The Twenty. —Fig. 113 shows two ways of imposing the twenty.

9 91

DD DD

7 14 S 01 IT

DD

3 18

DD

91 9

DD DD

13 8 Z' 6

DD DD

DD

7 14 01 II

DD

g

IDD

DD

19 2

•18

f II

DD DD

DD

13 8 Zl 6

DO, DD

15 6

■P

DD DD

19 2

Twenty-page Form. To be cut apart and folded as two separate forms, the sixteen insetting the four. The sheet must be tumbled.

Twenty-page Form. To be cut apart and folded separately, the twelve insetting the eight. The sheet must be tumbled.

Fig. 113.—Two Ways of Imposing a Twenty-page Fonn.

The Twenty-four. —^There are many ways of imposing the twenty-four. One arrangement is shown in Fig. 114.

164. Folders. —Fig. 115 shows the lay of a six-page and a twelve-page folder. This type of folder is sometimes called a " cat-step " or " pull-out" folder. It may consist of any number of pages—^four, six, eight, ten, twelve, etc. They are all laid

Digitized by VjOOQiC

in exactly the same manner. Beginning with page i in the lower left-hand comer, make page 2 back it up head to head, then run consecutively across the top from left to right, come into the

DDDD

3

I

f IZ 91 6

,DDDD

24 13 12

DDDD

01 91 ZZ

DDDD DDDD

11 14 23

Fig. 114.—A Twenty-four, Without Cutting.

bottom row at the right, and finish consecutively from right to* left. This brings the last page alongside of page i.

Z £ f ZSt90A

DDD DDDDDD

Head to Head. Head to Head.

DDD DDDDDD

16 5 1 12 11 10 0 8

Grlppo'-edge. Orlpper-edge.

Six-page Foider. Twelve-page Folder.

Fig. 115.—Showing the Lay of Cat-step Folders.

The folders cut apart between heads, the printed sheets being folded over and over. As there is no trim allowed, the sheets must be very accurately cut. The margins between pages

should be made up to the folded size.

In backing up a form of this kind the sheet is turned over from top to bottom, not from right to left. This method of

Digitized by VjOOQiC

e 9T

DD

g 7 10

8 6

DD DD

1 le Regular

8 6

DD DD

H e

DD DD

Z 91

DD DD

ZT 9

DD DD

13 4 Sixteen.

ei 9

DD DD

n 2

DD DD

For Dexter Single Marginal Book Polder.

01 I

DD .DD

§15 2

91 I

DD DD

9 8

Imposed]

91 T

DD DD

D DD

3 14

1-

I 01 I

DD DD

D DD

5 12

m Center.

DD DD

9 TI

DD DD

For Dexter Periodical Folder.

Fig. ii6.— Four Ways of Imposing a Sixteen-page Form.

Notice that the four pages in each quarter-section never

change position in regard to each other, even though the whole quarter-section changes position in the form.

Digitized by VjOOQ iC

turning a sheet is called "tumbling." These folders must be tiunbled. But in making up other forms never plan for a timi-bled sheet if it can be avoided, few: any variation in the size of a sheet will put the pages out of register.

165. Machine-fold. —Folding-machines do not all perform their work in exactly the same way. It is frequently necessary to consult the binder and have him mark a sheet for folding. Nearly all machines require the forms to be laid inside out. A work-and-turn 16-page form can be laid in four different ways and still fold correctly. See Fig. 116.

166. Signatures. —^After a book has been printed the sheets are folded, gathered, and bound. Each sheet makes one section of the book, and is called a signature. On the first page of each section there is a small figure, also called a signature, placed there as a guide to the binder in collating the sections, each section being numbered consecutively. If each section in a book contains sixteen pages, a small figure will sometimes be found on pages 17, 33, 49, 65, etc., throughout the book.

Sometimes in collating a book the bookbinder may gather two sheets instead of one, or may misplace some of the

signatures. To obviate this, marks are frequently printed in the backs between the two outside pages of a form. This is done with a heavy rule, which is placed in a new position for each form. When the signatures are collated they resemble Fig. 117.

Fig. 117.—Diagram Showing Collating-marks on Backs of Signatures.

If a signature is missing, misplaced, or duplicated the error can be detected at a glance.

167. Insetting. —Forms are sometimes imposed so that after a sheet is printed and cut apart one part will inset the other. For example, a twelve-page form may consist of an

Digitized by VjOOQiC

eight-page form and a four-page; a twenty-page form may consist of a sixteen and a four or a twelve and an eight; a twenty-four may consist of a sixteen and an eight. Whenever forms are imposed in this way, arrange to have the larger form inset the smaller; it is easier for the binder.

i68. Press-points. — On some folding-machines the sheets are fed to points as a guide for correct margins. When these are required, the press-points are screwed into wooden furniture in the form and arranged to make a strong mark in the head margin. They are usually placed fifteen inches apart

—seven and one-half inches each way from the center of the first fold. Get the proper place and distance from the binder.

169. Other Forms. —It is not to be imderstood that the various forms given in this chapter are the only ones capable of being properly folded. There are many, many others. Forms up to 128 pages are not uncommon. Forms are frequently worked two-on: that is, two sets of the same pages are printed in one form and so arranged that after folding and binding two complete copies are obtained, thus cutting down the cost of binding. Manufacturers of folding-machines issue diagrams showing the various forms capable of being folded on their machines.

170. Proper Lay of Lengthwise Forms. —^When type pages or illustrations are imposed so that they run lengthwise of the page of the book, they should read up the page. This will place the head of the printed matter to the left-hand side of the page. This follows for both right-hand and left-hand pages.

171. Folding Heavy Paper. —If a job is being printed on heavy paper, it is inadvisable to have the signatures made up of a great number of pages, for heavy paper has a tendency to crimp and break where the backs join the heads. Better print the form as two signatures, one insetting the other.

172. Chases.—Fig. 118 shows an ordinary book chase and a McGreal Combination Chase. The McGreal chase is an

especially ingenious arrangement. As will be seen, the chase is made up of separate bars. These bars come in lengths from

Digitized by VjOOQiC

four to sixty-two inches, all interchangeable, so that with a few assorted sizes a printer can make up a chase that will just fit his

Ordinary Book Chase. McGreal Combination Chase.

Fig. ii8.—Two Types of Book Chases.

form, thereby obtaining a better lock-up than would be the case if the chase was out of all proportion to the size of the job.

QUESTIONS ON CHAPTER XI

1. What do you understand by " imposition" ?

2. Why are forms usually made up so as to be in multiples of four ?

3. What is a work-and-tum form ?

4. What is a sheetwise form ? $. What is an insert ?

6. What do you understand by saddle-stitched ?

7. Why is it important to know whether a job is to be folded by hand or by machine before the form is imposed ?

8. What do you understand by margin ?

9. On how many sides of a page of a book is trim usually allowed ? 10. Why is it that a book requires trimming and a circular does not ?

Digitized by VjOOQiC

11. How would you determine the back margin between two pages if they were of equal size ? if of unequal size ?

12. What do you understand by making up to the paper ?

13. Describe how you would determine the lay of a form by folding and marking a dummy.

14. Name the various parts of a form.

15. Can you think of some reason why the two middle pages and the two outside pages of every form always come head to head ?

16. When imposing a pair of pages with the foot of each page

toward you, is the uneven folio to the left or to the right ?

17. What is a chase ?

18. How are chase-bars inserted, from the top or the bottom ?

19. How should chase-bars be removed ? What will happen if they are forced in the wrong direction ?

20. Name the relative advantages and disadvantages of metal and wooden furniture.

21. Draw a diagram of a 16-page form showing the pages in proper position for hand-folding. Mark all the different parts of the form, and show the quoins in proper position.

22. Why should we begin with the quoins at the bottom of pages when locking up a form ?

23. Why is it wrong to plane a form after It is locked up ?

24. When beating off a proof of a form, what advantage is there in having each pair of pages on a single sheet ?

25. What is a cat-step or pull-out folder ? Why is it not laid the same as other folders ?

26. What is a signature ?

27. What expedient is sometimes resorted to to insure accuracy in collating signatures ?

28. What is insetting ?

29. What are press-points ? Why are they used ?

30. How should lengthwise pages read, up or down the page ?

31. What is the disadvantage in having a great number of pages printed on a heavy sheet of paper, and folding up as one form ?

32. What advantages does the McGreal Combination Chase possess over the ordinary kind ?

Digitized by VjOOQiC

CHAPTER XII

CUTTING-TOOLS FOR PRINTERS

173. Miller Saw-Trimmer. —^The great slogan of the day is "efficiency," and inventors are vying with each other in every branch of the printing business to produce tools that will curtail labor and increase output. Whereas, a decade ago a printer was compelled to send to an electrotyper for the various odd jobs of sawing, cutting, trimming, mortising, beveling, routing,, and dressing up material, nearly every

large office now has a single machine that will do all of these things. The Miller Saw-Trimmer (Fig. 119) is a pioneer in this class of tools.

Any printer owning a machine of the above t)^e is no longer under the necessity of cutting leads, slugs, and rules singly on the lead-cutter. These things may be cut in bulk, and they leave the machine accurately and perfectly cut, and there is no necessity for further dressing up before using. Typefounders cut all their material with metal-slitting saws.

174. The Lead-cutter.— No office is complete without a lead-cutter. It is the most useful piece of mechanism about the office, and at the same time the most abused. Fig. 120 shows the American Lead- and Rule-cutter. As its name implies, it is for cutting leads and rules. Leads are cut on the front of the machine, slugs and rules on the back. There is a limit to the

Fig. 119.—^Miller Saw-Trimmer.

Digitized by VjOOQiC

amount of stress that can be put on any piece of mechanism. Therefore the directions here given for using the lead-cutter will be devoted more to what not to do than to what to do. The actual method of setting and using the cutter is obvious, but the author has seen so many foolish things done on a lead-cutter, both by apprentices and journeymen, that he must sound a warning.

Do not try to cut steel rule on a lead-cutter: use a three-cornered file for such work, and dress the piece to size and perfect finish with a flat file. Remember that the machine is a lead-cutter, not a steel cutter. Remember, also, that mitering-machines are not to be used for this purpose.

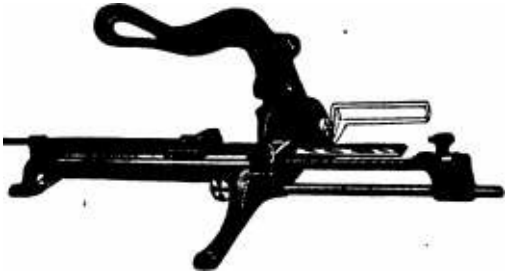

Fig. 120.—^American Lead- and Rule-cutter.

Never try to cut more than one lead at a time. If you do, you will bend the ends of the leads, and they will be unfit for use. If, when cutting a single lead, the end is crimped or dished, it is a sign that the knife needs adjusting.

Never cut slugs on the front of the machine, you can get a better leverage on the back.

Never attempt to cut a slug thicker than twelve points, unless the machine is built for heavy service. In fact, twelve-point slugs may be too thick for some cutters. Do not rely on your judgment; ask some experienced workman.

Linotype slugs, which are usually softer than regular slugs, may be cut on the average cutter if not above twelve points. If much of this work is done, however, a special slug-cutter should

Digitized-by VjOOQIC

be provided. These are built on the same principle as a lead-cutter, but are very strongly made. (Fig. 121.)

The blank parts of linotype slugs are but slightly lower than the face of the type. If the type matter is very open,, the rollers will touch the slugs and they will print on the sheets. To obviate this it is frequently necessary to cut the slugs away so that they will not print. This is sometimes done on a lead-cutter, sometimes with a coarse file. If much linotjrpe work is done it will pay to have a Barber Low-slug Trimmer for this purpose.

Rule up to four points thick may safely be cut on a lead-cutter. The oi)eration will very likely dish the ends, so it is

Fig. 121.—Rouse or American Slug-cutter.

advisable to cut the rule a few points longer than actually needed and then dress it to size on the mitering-machine.

It is sometimes necessary to cut pieces of leads to some point-size other than multiples of pica. Some machines have gauges, graduated to points, that can be set to accomplish this

purpose. If the machine does not possess this device, any regular t)^e of machine may be made to do the same thing. Suppose a number of pieces thirty-four points long are wanted: make up some combination of spaces and quads to equal thirty-four points. Set the gauge at any pica measure (say twenty ems). Put the combination of spaces and quads against the gauge, insert a piece of lead (not labor-saving) about eighteen ems long and cut oflf the end of the lead. Now remove the quads and spaceS; push the lead back against the gauge, and use the lead for a new

Digitized by VjOOQIC

gauge. The distance between the end of the lead and the knife is now just thirty-four points. Any size lead can be cut in this way.

175. Mitering-machine. —^Mitering a rule is cutting the end of it to a bevel so that when a right and a left miter are joined together they will produce a corner with a certain angle. If a ninety-degree corner is desired, both miters must be at an angle of forty-five degrees. Various forms of mitering-machines have from time to time been devised for this purpose; some practicable, some impracticable. For many years two different types of machines remained in public favor—the horizontal and the vertical. The horizontal is known as the "Mitchell Mitering-machine." It has gradually been supplanted by the vertical or upright type, and is no longer manufactured.

The proper miter on a Mitchell machine is secured by the use of a knife ground to the proper bevel, a set of knives accompanying each machine. On the upright machine, however, there is but one knife, and the proper miter is secured by shifting the gauge-bar around the arc of a circle. The base of the gauge-bar has a hole in it and is provided with a pin which may be slipped into holes in the bed-plate. When the hole in the gauge-bar comes in line with a hole in the bed-plate and the pin slipped into place the machine is accurately set to miter to a^ certain bevel. The holes in the bed-plate are numbered. If rule for a four-sided border is desired the pin in slipped into hole No. 4. This will produce rules of the proper miter. If a six-sided border is desired, the pin is slipped into hole No. 6; and so on. There are two sets of numbered holes, so as to produce right and left miters. There is thus provided a quick means of obtaining angles without making calculations.

The Mitchell machine is especially useful in cutting apart or mitering thick rule, and for mortising letters. The upright machine is useful only for mitering and for dressing material to size. The material must first be cut apart. Leads, slugs up to ten-point, and rule up to four-point may be cut apart on a lead-cutter. Rule thicker than four-point should be cut with a

Digitized by VjOOQiC

hacksaw and dressed to size on the upright machine. Twelve-point brass rule is about the limit that should be attempted. The author has dressed up eighteen-point rule, but it was a hard job.

176. The Upright Machine. —In this type of machine (Fig. 122) the knife is secured to a knife-holder, which is moved up and down by hand in two slots milled in the body of the machine. The slots are wider than the guides on the knife-holder, so as to allow some play sidewise. This is important.

When using the machine, the knife-holder should be moved to the right, then raised to its highest point, then moved to the

Fig. 122.—Rouse Mitering-machine.

left, and forced down to make the cut. The amount taken off at each cut is determined by the "set" of the knife; that is, the distance it projects from the knife-holder. One-half a point

(about 0.007 inch) is about right. Hardly any two machines are set the same as this. It is a matter of individual preference.

It will readily be seen that each change in the "set'* of the knife will alter the length to which the material will be cut, unless the gauge is adjusted to meet the set of the knife. So far as the author is aware, there is not a machine on the market containing this essential feature. For this reason the compositor is warned against relying on any machine possessing a

Digitized by VjOOQiC

"set" gauge. It was doubtless all right when it left the manufacturer, but someone may have altered the "set" of the knife. Test it. The machine illustrated in Fig. 122 has an adjustment for setting the gauge to multiples of points, but it has no means of first adjusting the gauge accxu-ately to pica distances from the cutting-edge of the knife.

When using the machine do not slip the gauge into a pica notch and proceed to cut the material to size. Someone may have moved the point-adjustment a point or two; perhaps the knife is not set so tliat the distance between gauge and knife-edge is exactly to picas. Test the knife-setting before using the machine.

To reset a knife so that the gauge will be accurate, slip the

gauge into a pica notch, place a tested piece of labor-saving rule the same length as the measure of the gauge against the gauge-bar, and set the knife to the rule. To do this, place the knife loosely in position in the knife-holder, raise it imtil the knife is in line with the middle of the end of the rule, hold the knife-holder firmly against the left-hand side of the machine by pressing against it with your body, adjust the knife against the end of the rule, and clamp it securely in position.

177. Trimming Material. —If the job in hand is simply one of trimming to get straight ends, there is no need to set the gauge. When using the machine, however, there are several important things to be kept in mind.

The proper method of operating the knife is to swing the handle to the right, raise it to full height, move it to the left, and make the down stroke firm and steady. At the same time press the material against the knife-holder and hold it firmly alongside of the gauge-bar. Continue cutting until sufficient material has been removed. When bringing the knife up for a new stroke, be careful not to rub the knife against the material. To do so may rub a burr on the top of it.

178. The Burr on Rule. —^Nearly all mitering-machines leave a burr on brass rule. After finishing the trinmaing, turn the rule on end, bottom toward the knife, and trim off the burr.

Digitized by VjOOQiC

If the rule is to be trimmed on both ends, be sure to trim off the burr on the first end before trinmiing the other. If you do not, the burr will tilt one end of the rule and the other end will be trimmed at an angle. Compositors who are in the habit of producing rules trinmied on the bias always blame it on the machine, never on themselves. Remember the burr.

179. Trimming to Gauge. —^When a number of pieces of

Left hand, Index-flnger holding standard rule agalrtflt gange-tar while thumb-aarew is IbiiSnt tli^btijiKidl)!' thumb ami middle flngtr.

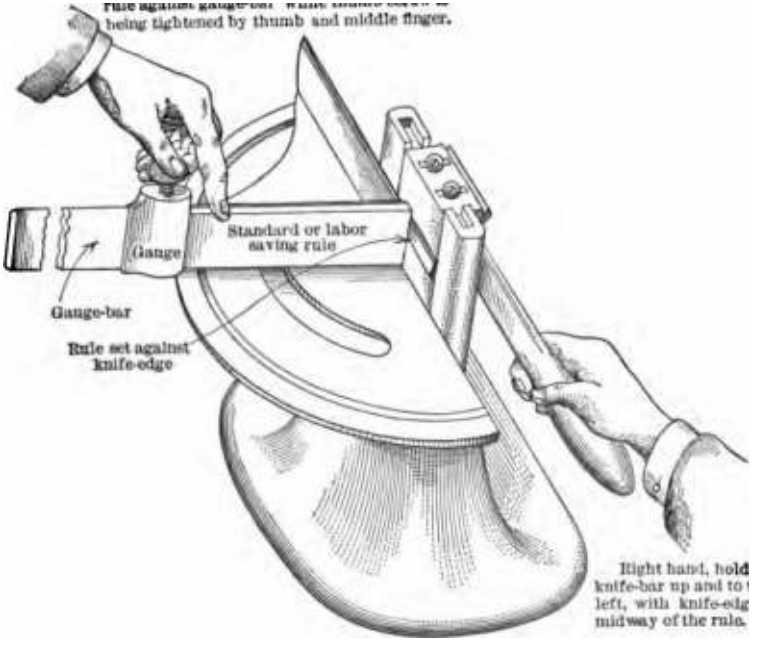

Itlffht haml, hc^lding IcnlfD-bar Up uuii co the

D)Mway at the ral&

Fig. 123.

rule are to be cut and trimmed to the same size, cut the strips apart on the lead-cutter, leaving them long enough to allow for trim on each end, for the lead-cutter may possibly "dish" the rule or bend the face of it. Cut enough for the whole job. Take the strips to the mitering-machine and proceed to dress up one end of each rule, being careful to remove the burr.^

Digitized by VjOOQiC

Now set the gauge. To do this correctly obtain a piece of labor-saving rule (test it to insure accuracy), place it against the gauge-bar, raise, the knife-holder high enough to bring the knife to about the center of the labor-saving rule (see Fig. 123); while holding the knife-holder firmly to the left, press the rule against the knife-edge, move the gauge against the rule, and damp the gauge in position.

Ujiclt ot loiUe-blAda

fitnall N«ce of 4-^potnt rule

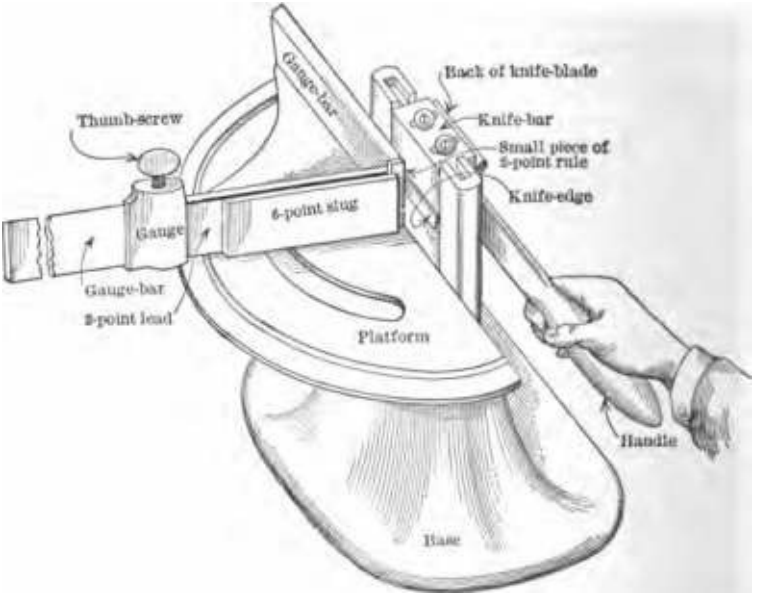

Fig. 124.—^Dressing up a Small Piece of Rule on a

Mitering-Machine.

The distance between knife-edge and gauge is now exactly the same as the length of the rule. Do not make the mistake of placing the rule against the body of the knife-holder instead of the knife-edge when setting the gauge; if you do, the rules will be the thickness of one cut shorter than the sample.

When a rule is now placed against the gauge it will be seen why it is necessary to have some play sidewise in the upright

Digitized by VjOOQiC

slots, for the rule is longer than the measure. Hold the rule down against the base and back against the gauge, and continue cutting until no more material can be removed. Stand the rule on its end and remove the burr.

Be very careful not to strike the rule on the up stroke. If you do it will trip the rule and jam the corner against the gauge, thus battering the face of the rule and spoiling the piece. A piece of rule with a bias end or a battered comer will not make a perfect joint. Both defects can be avoided with a little care.

i8o. Cutting to Multiples of a Point. —If a piece of rule is to be cut to some multiple of points, set the gauge accurately to picas, and place enough material between the gauge and the rule that is to be trimmed so that the rule will be the right

length when finished. For example, suppose that a rule two points less than ten picas is wanted. Set the gauge accurately to ten picas, put a space two points thick in front of the gauge, place the rule against the space, and proceed with the cutting. When the rule is finished it will be two points less than ten picas.

i8i. Cutting Very Small Pieces of Rule.— When cutting a piece of rule that is so short that there is not enough space between the gauge and the knife for the insertion of the fingers to hold the rule, set the gauge to a wider measure and use a piece of rule of the same thickness as the piece being cut. This will act as a gauge. The distance between the end of this rule (which we will call the "gauge-rule") and the knife-edge is the size to which the rule will be cut. Set the gauge in the same manner as described in Section 179.

The author has cut pieces as small as six points. It i? almost impossible to hold extremely small pieces in position with the fingers. They may be easily held, however, by placing a six-point slug in front of the rule and the "gauge-rule" and pressing them both against the gauge-bar. (See Fig. 124.)

182, Type " Fitting " on a Mitering-machine. —^The process of mortising or bevelling letters so that one may overlap another is known as "fitting."

Digitized by VjOOQiC

Side mortices in initiak or for fitting letters are best made on a Miller Saw-Trimmer. (See Fig. 125.) If a Mitchell machine is available it will also be found useful.

This is how the A, V, and A, in AVALON, on page 103, were cut and fitted.

Fig. 125.—^Letters Mortised to Fit

The upright machine is sometimes used for this purpose, but the letters are cut on an angle. (See Fig. 126.)

This is not as good a way as the first, for pressure on the ends of the line is apt to wedge the line out of alignment. It is usually done only when a Miller or a Mitchell machine is not available. The printer who lacks a mitering-machine can

Fig. 126.—Letters Mitered to Fit.

accomplish the same residt with a coarse file. It is a laborious task, however, and requires considerable skill to

make a perfect job.

183. Type-high Machines. —Owing to the fact that the printing-plates furnished to the printer are frequently above type-high (0.918 inch), many printers have found it advisable to instal type-high maphines. These are devices for dressing off the bottom of plates. There are several machines on the market, and they accomplish the work by filing, dressing off with knives, or by the use of rotary cutting-tools.

When type and plates are worked in one form, it is very essential that they be all of one height. The use of type-higb

Digitized by VjOOQ IC

machines saves a lot of time on make-ready in the pressroom. A form of plates that are either above or below t)^-high will be rapidly worn out if run on a cylinder press.

184. Care of Machines. —^The care of all cutting-tools in a composing-room should be entrusted to one man, whose duty it should be to keep them clean, well oiled, and the cutting-edges always sharp. A sharp tool saves xmnecessary strain and wear on the mechanism; and by being a pleasure to the user is conducive to better work. Tool-blocks for use in sharpening the knife usually accompany the upright mitering-machirie. By placing the knife against the sloping side of this device and rubbing them both over the face of a good emery or carbonmdimi stone, a new edge will be put on the knife,

and at just the right bevel. When edging a cutting-tool, endeavor to maintain the original bevel, for that is the proper angle for perfect service.

QUESTIONS ON CHAPTEE XH

X. Name some of the things that may be done on the Miller Saw-Trimmer.

2. How should steel rule be cut apart and dressed to size ?

3. How many leads may be safely and accurately cut apart at the same time on a lead-cutter ?

4. What would you surmise was wrong with a lead-cutter that crimped or dished the end of a lead or rule ?

5. Why is it inadvisable to cut thick slugs or rules on an ordinary lead-cutter ?

6. If you needed some leads eighteen picas and three points long how would you cut them to size on a lead-cutter that had a gauge that was only adjustable to picas ?

7. Describe how you would secure leads of the following lengths on the machine spoken of in Question 6: 118 points, 122 points, 94 points, 98 points, and 37 points.

8. How would you cut apart a thick rule or slug if a special machine was not available ?

9. What is a miter ?

10. Why are right and left miters necessary ?

11. How are the proper miters secured on the Mitchell machine ? on the upright machine ?

Digitized by VjOOQiC

12. Describe how you would set the gauge and how you would operate the upright mitering-machine. Tell what each particular move is intended to accomplish or to avoid.

13. Why should the " set " of the knife on an upright mitering-machine always be the same as when the machine left the manufacturer ?

14. Describe the resetting of a knife so that the pica-gauge will be accurate.

15. Why is it so important to remove the burr from the ends of brass rule?

16. Why is it necessary to have some sidewise play for the knife-holder in the upright slots ?

17. What will happen if a rule is tripped on the up stroke of the knife-holder ?

18. If a mitering-machine did not possess a point-adjustment,

how would you cut rule to a multiple of points ?

19. Describe a method of cutting very small pieces of rule.

20. What do you understand by type-fitting ?

21. Describe the different ways of fitting type.

22. Which is the better way of fitting type, by mitering or by mortising ? Give your reasons.

23. What is a type-high machine ?

24. Why is it important to have all printing surfaces in a form exactly type-high ?

25. Of what use is the tool-block that usually accompanies an upright mitering-machine ?

26. Why is it advisable to place one man in charge of all the cutting-tools in a composing-room ?

Digitized by VjOOQiC

CHAPTER XIII COMPOSING-MACHINES

186, Economy of Machine Composition.—WhUe every branch of the printing business is showing wonderful progress, in none is the stride more rapid than in the field of composing-machines. It has not been such a great number of

years since men laughed at the idea of being able to set type by machinery. To-day it is an established fact; in fact, so firmly is it established that the statement may be safely ventured that there is very little, if any, straight matter now being set by hand. From the standpoint of economy, any piece of matter containing upward of three thousand ems can be composed cheaper on a machine than by hand. Moreover, the printer is not only bu)dng composition but material from which to print, so that there is no wear on his own material.

There have been quite a number of machines invented to set foimdry type, among them the Rogers, Thome, and Simplex, but the superior efficiency of the machines that both compose and make the type, either singly or on a slug, has resulted in their being almost supplanted. The major portion of straight matter to-day is either monotyped or linotyped. Each method has its votaries, and for certain reasons each is better adapted to specific purposes.

186. The Linotype.—^The Lmotype machine (Fig. 127), so called because it casts a "line o* type," or slug, was invented by Ottmar Mergenthaler, in 1885. The machine consists essentially of a magazine containing brass matrices, in one side of which two characters have been punched; a keyboardy connected with the magazine by a rod, pawl, and verge, so that one matrix may be released at a time by simply touching a button on the

Digitized by VjOOQiC

keyboard; an assembling device, to carry the matrices into the stick, so that the operator can gauge his lines; wedge-shaped space-bandsf so constructed that when inserted between words they may be expanded and the line justified; and a device to carry tne composed line over to the casting mechanism, where

LiG. 127.—^Linotype No. 17.

the line is justified, and the matrices held against the mold-

disk, while metal is being forced into the mold from the melting-pot, and the line cast. After the line is cast the matrices are withdrawn from against the mold-disk, an arm comes down from the top of the machine, the matrices are slipped onto the arm, the arm is raised, and the matrices are pushed off onto the dis-

Digitized by VjOOQiC

tributing-bar, where they are carried forward by a worm. Each matrix has a key-way, so arranged that the matrix can only sUp from the distributing-bar when it gets over its own place in the magazine. In this way the matrices are automatically returned to the magazine ready to be used again.

The operator of a Linotype composes the matrices and controls the casting mechanism,. If errors occur, it is necessary to reset the whole line, perhaps several lines, in order to correct them. The machine is specially adapted to newspaper work, for the slugs can be handled with less care than is required in handling type matter composed of individual letters.

Each matrix in a magazine is stamped with a certain character or letter of the alphabet, but in two different faces of type. As the matrix is being assembled in the composing-stick, it is possible, by the use of a special device, to bring either face into alignment, thereby setting two different faces

of type in one line.

The early type of machines contained but one magazine, and could make slugs of but one size, unless the mold was changed. Of the later styles, the No. 9 has four magazines, and can cast eight different faces, all the operations of change being made by the operator simply by moving a few levers; and that, too, without leaving his seat at the keyboard.

Even though the Linotype casts solid slugs, still it is possible to compose tables on the machine. This is done by the use of special matrices, which cast small lugs in the slug so that pieces of triangular brass rule can be put into position and the lugs crimped about the rule. Another way is to make saw-cuts in the slugs in proper position and then force pieces of brass rule into these cuts.

Tabular work may also be done by cutting the slugs to col-unm width and using rules between the columns.

The very latest method is by the use of the Auto-Mat Tabulator, a device consisting of a matrix with two movable jaws, so arranged that in casting a rule a triangular orifice is left in it, into which a triangular rule can be slipped, thus making a perfect joint in the rule.

Digitized by VjOOQiC

While the Linotype is frequently used for setting newspapers,

it must not to be inferred that it is useful only for this work; there is an increasing abundance of high-class magazine and book work being produced.

187. The Monotype. —^The Monotype, so called because its product consists of separate letters, was invented by Tolbert Lanston, in 1887. A complete outfit for composing type con* sists of two separate parts—a keyboard (Fig. 128) and a casting-

Fig. 128.—Monotype Keyboard.

machine (Fig. 129). The connecting-link between the two machines is a ribbon of paper in which holes have been punched (somewhat on the order of a music-roll), the holes

automatically controlling the casting device, so that whatever character was touched on the keyboard will be cast on the casting-machine. It also automatically casts spaces of just the right thickness so that after the line is composed it exactly fits the measure to which it was set. The casting-machine automatically makes

..gitized by Google

the type and spaces and composes the lines, moving each line forward so that the next may come into proper position.

The successful operation of the Monotype system is due to the fact that each character is cast on some predetermined width, or unit. The Monotype imit is one-eighteenth of the cap M of the font. When a line is to be composed it is only necessary to know the width (set-size) of the face of the font,

Fig. 129.—Monotype Casting-machine.

and the length of the line. When these matters have been decided it is simply necessary to consult a chart (for these calculations have been made and charted) and set the indicator to a certain niunber of units. This indicator shows how many units of the kind of type we wish to use may be gotten into a line of the width we wish to set.

When a key is touched on the keyboard the indicator moves XQ th^ right a number of units equal to the width of the letter

Digitized by VjOOQiC

struck. When the next key is touched the indicator moves that number of imits. In this way the full width of the space is used up, until there is not sufficient space to get in any more words, after which it is necessary to space the line.

At the top of the keyboard there is a cylindrical device called a justifying-scale. When nearing the end of the line, as the line is being composed, each time a letter is struck the cylinder moves a niunber of units equal to that letter; each time a normal space is touched a pointer moves up one step on the justifying-scale. After the line is completed, the pointer on the justifying-scale shows which justifying-keys must be struck to punch holes that will set the space-setting mechanism on the caster.

At first thought it seems almost impossible to strike a space and afterward determine its size. When we realize that the ribbon is run into the casting-machine backward, the matter becomes quite clear, for the first thing that happens on the casting-machine is the last thing that was done on the keyboard —the space-setting mechanism is set to size. This is done with a pair of accurate wedges, the setting of which adds the required amount to the normal wedge. Once the space-casting mechanism is set for a line each space emerges from the caster exactly of the same width.

There are two hundred and twenty-five matrices in a matrix-case (Fig. 130) on the caster, each controlled by a key on the keyboard. There are fifteen rows with fifteen characters in

each row. The rows in one direction are called unit raws, and the fifteen characters in each um't row are always cast on the same width of body. When the matrix-case moves into any unit position the mold is set automatically so that the letter cast is on a body of the proper width. If the matrix-case moves to eighteen-unit position, the mold opens to that width; if the matrix-case moves to nine-unit position, the mold-opening is nine units wide, etc.

Owing to the fact that Monotype is all cast of unit width, it is practically self-spacing, and therefore specially adapted to

Digitized by VjOOQ iC

tabular work (Fig. 131). It is mathematically accurate, and all lines are absolutely of the same length. Tabular matter can be composed in column form and delivered on the galley ready for the insertion of the rules.

The use of special characters in the matrix-case permits of setting units which, when assembled, look exactly like work composed of brass rule. (See Fig. 79(6) and Fig. 82.)

M

jjj fff

aa 00

gg

XX

Fig. 130.—Monotype Matrix-case.

Fig. 131.—Illustrating the Relation between Characters of the Same Font: Thus, M (i8-unit Character) is the same Width as Three j's or f's (6-unit Characters), or two a's, o's, g's, or x's (9 -unit Characters).

It is also possible to compose and cast a large face on a small body by supporting the overhanging part with plain quads or with slugs made on the Monotype. Faces as large as sixty-point can be cast on bodies as small as twelve-point.

188. Mounting Illustrations in Machine-set Composition. — ^There was a time when it was absolutely necessary to run type matter around the blocks on which illustrations were moimted. That necessity no longer exists.

Digitized by VjOOQiC

The Monotype Company was the first in the field with a method of moimting illustrations directly on the composed material. To do this it is necessary to know just what part of the page is to be covered with type and what part with illustration. This is determined by the use of a layout-sheet The quads are of such height that a plate eleven points thick when mounted on the quads will be exactly type-high. After the

Fig. 132.—Showing Monotype Method of Mounting Cut Directly on Quads, and also Form and Use of Tie-up Slugs.

proof is finally passed the plate is cemented to the quads. (Fig. 132.)

The Linotype Company's method is to prepare a layout sheet, then set the lines of type of the proper length to go around the illustration. After the whole page is in type the slugs are lined up along the inside and the blank parts of the slugs routed away to the proper depth so as to form a level base for the plate. After the slugs are reassembled the plate is placed in position and nailed fast to the slugs. (Fig. 133.)

189. Non-distribution.—^While the product of the Monotype machine may be distributed into cases, and then set by

Digitized by VjOOQiC

hand, it is becoming more and more evident that such procedure is inadvisable. There are two reasons for this: first, it is better to have new material on each job; second, it costs money to pick a job apart and then distribute the type. Doing away with the necessity for distribution is the order of the day, and the next decade will doubtless witness many radical changes

Fig. 133.—^Linotype Slugs Routed Ready for Mounting Illustration.

in the production of composed type. Even now the Mono-t)^ Company has provided attachments to its casting-machine for producing type, borders, leads, slugs, rules, electrotype bearers, and tie-up slugs. The use of this material renders distribution unnecessary. After a job is completed it is swept off into the melting-pot.

Digitized by

Google

The Linot3T>e machine is a combined composing and casting mechanism. The caster part of the machine is sold separately, and may be used for casting leads, slugs, rules, borders, etc.; the length, however, is restricted to thirty-six picas.

At this writing, the Linotype Company is putting out a machine known as the Ludlow Typograph. With this machine the matrices are set in a special stick and the lines cast on a slug, which is then put into place in the job. It will cast a face as large as forty-eight point on a twelve-point slug. Slugs of various thicknesses and lengths can also be cast. The slugs are of the required height to support the overhanging slugs.

190. The Intertype.— Inasmuch as some of the basic patents on the Linotype have expired, another machine built along the same general lines has made its appearance. It is called the Intertype.' It is a newcomer, is rapidly adding improvements, and is destined to become a very important machine. Its strongest bids for favor are the facts that it contains fewer parts and is being marketed at a much lower price than the Linotype.

191. Type-casting Machines. —Printers are finding it expedient to instal type-casting machines, thereby keeping their cases plentifully supplied with type. There are quite a few machines on the market. The Monotype caster will cast type bodies as large as thirty-six point. The Monotype Company has an extremely large number of type faces from which to choose, and the matrices may be rented for a nominal sum.

QUESTIONS ON CHAPTER XHI

1. What is machine composition ?

2. What two distinct methods of machine composition are in vogue at the present time ? Describe them.

3. Why is the Linotype machine so called ?

4. What does the word monotype mean ?

5. Give a general outline of the manner in which lines are

composed and cast on the Linotype; on the Monotype.

Digitized by VjOOQIC

6. How is tabular work composed on the Lmotyi>e ? on the Monotype ?

7. What is the Monotype unit ?

8. How many matrices are there in a Monotype matrix-case ?

9. Explain how illustrations are mounted on Monotype quads; on Linotype slugs.

10. What do you understand by non-distribution ? Why is it advisable ?

11. What is the Ludlow Typograph ?

12. What is the Intertype ?

Digitized by VjOOQiC

CHAPTER XIV

PRESSWORK

The term presswork covers two entirely different methods of obtaining impressions from type forms : by the aid of cylinder presses and by the aid of platen presses. The latter

is the only

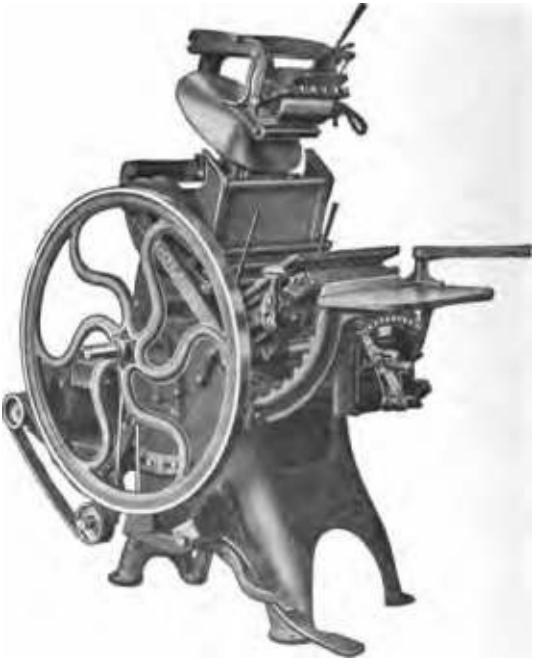

Fig. 134.—Golding Jobber.

one that will be discussed in this treatise. Primarily, because it is the simpler method and the one likely to be in general use in manual training schools, and because it is the logical step-

Digitized by VjOOQiC

ping-stone to the more complex one of cylinder presswork,

and admits of clearer exposition. He who aspires to be a cylinder pressman should first master the platen press. When that is accomplished he is qualified to take up cylinder work under the guidance of a skilled pressman.

192. Platen Presses. —A platen printing-press is one in which the form is locked up against a bed and the impression is

Fig. 135.—Chandler & Price Gordon Press.

delivered against a flat, smooth, level plate called a platen. There are two types of platen presses: one, known as the "clamshell" type, in which the platen rocks up against the

bed (Figs. 134 and 135); the other, known as the sliding platen, in which the platen is first placed parallel with the bed and then drawn up against it (Fig. 136). The latter method is the better one.

193. The Bed. —The bed of a printing-press is the part on or against which the form is fastened. On platen presses the

Digitized by VjOOQiC

bed is always attached to some upright part of the framework. Tn some types of presses the framework moves, in others it is

IiG. 136.—John Thomson Press, Model J.

rigid. While no adjustment of the bed is ever required, it is very important to see that the form is safely locked against it.

194. The Platen. —Inasmuch as the platen is the part against which the impression is taken, means must be provided

Digitized by VjOOQiC

for altering, regulating, or equalizing the impression. This is accomplished by the use of adjusting-screws beneath the platen. To allow for variation in making ready, the experienced pressman has, for general use, a sheet of pressboard and three or four sheets of hard paper on top of the platen. This tympany or packing, as it is sometimes called, is covered with a sheet of heavy manila paper, called a draw-sheet.

It is quite evident that if the platen is not properly adjusted the impression will not be even. The proper way to adjust the platen is to lock up four large, gothic letters, one in each corner of a chase, and pull an impression. By raising or lowering the impression-screws, as required, the whole four letters may be made to show uniformity of impression. When this is accomplished, the screws should be fastened with the lock-nuts. After the platen is once properly adjusted it should never be changed unless it becomes sprung, or it has been necessary to alter the impression in order to print a heavy form that could not possibly be locked in the center of the chase. If the impression has been altered for a special form, it should be leveled before proceeding with the next one.

195. The Draw-sheet.— The draw-sheet is the heavy sheet of manila paper that is stretched tightly over the packing and clamped under the tympan-bales. The guides and fenders are fastened to it.

196. The Grippers. —^The grippers are the long steel "fingers" or strips that are clamped to the gripper-bar, which, in turn, is moved by the mechanism of the press, and causes the grippers to press the sheet tightly against the tympan while the impression is being taken, and to hold it there while the form and sheet are being withdrawn. On extremely light forms they are not necessary. If the form is a heavy one and carries much ink, they must be used to pull the sheet from the form. They are adjustable, and should be placed in the margins on light forms and at the point of strongest suction on heavy forms. Skeleton grippers are very convenient to have at hand, for it is sometimes necessary to use grippers in a very narrow space.

Digitized by VjOOQiC

If the grippers fail to exert the required pressure on a sheet, a few thin pieces of cork glued to them at different points will usually prove effective.

197. Roller-bearers. —^The subjects of roUer-bearers, gudgeons, etc., are fully treated in Sections 144 and 145, and should be reviewed at this point.

198. Rollers. —Printers' rollers are made from a composition containing glue, glycerine, molasses, and other ingredients. Each manufacturer has his own pet formula, the proportions of which he varies according to the season of the year. These rollers are very susceptible to changes in

temperatiure and humidity. It is, therefore, impossible to make a composition roller that will be in perfect condition at all times. Heat will soften the composition and cold will harden it. It will absorb moisture from the air and become "tacky." A roller in perfect condition for printing yields slightly under a firm pressure of the finger, and has enough "tackiness" to cause the ball ot the hand to drag, when it is rubbed over its surface. If the hand slides, it lacks suction. If the finger sinks into the roller, the roller is too soft; if it does not dent the roller at all, the roller is too hard. Summer rollers (which are purposely made of a firmer composition) are too hard for winter use and winter rollers are too soft for summer use. Some printers change their roller outfits four times a year. This practice really pays; for a pressman can easily waste in time the cost of a set of rollers trying to do good work with poor rollers.

Hot, humid weather is especially trying on a composition roller; the atmospheric heat and the frictional heat sometimes being sufl&cient to cause the composition to "nm down." Rollers should be carefully watched on hot, damp days.

Some inks have a very deleterious effect on composition rollers, many of them possessing an astringent property which takes all the suction out of the roller.

Rollers gradually shrink, and frequent changing of gudgeons is necessary so as to have roller and gudgeons of the same diameter. See under "Gudgeons," Section 145.

Digitized by VjOOQIC

199. Oiling the Press. —One of the first things with which the embryo pressman should make himself famiUar is how and where to oil the press. Every oil-hole should be located, and never neglected. The press should be fully and carefully oiled each morning before beginning work. A few drops at each point is usually sufl&cient. Do not flood the press with oil, for the surplus will simply run to waste. K any oil rims over the part while in the act of oiling, wipe it off at once. If the press has oil-cups, see that they are filled each morning. If you find that the oil-cups do not need filling, it is a sign that they are not feeding. Adjust them, and be on the lookout for warm bearings. If there is even the slightest squeak about a press ferret it out; something needs oil. To neglect it may ruin the machine. The side-arms on platen presses require careful attention. Do not fail to oil them daily. Also, be sure that all oil-holes are not clogged with dirt, otherwise they will not get oil even though you think you are oiling them.

Never attempt to oil or wipe a press while in motion. It is positively dangerous; practice the motto "Safety first."

200. Shrinking of Furniture. —^After a form has been locked up and left standing for some time, it is usually foimd that the type is loose. This may be due to one of two causes, perhaps to both. The wood may have shrunk, or it may have yielded to the compression to which it was subjected. In any event, never go to press with a form without first being assured that

the type is absolutely tight. If the press is left standing with the form on it for any length of time, try the quoins before proceeding with the job.

If compelled to leave a press standing for any length of time, remove the rollers. Never leave the rollers in contact with the form or on the ink-plate; the constant pressure will mark or mar them.

If, for any reason, a job is not completed at once, but is left on press for a few days, do not leave the press wide open, with the tjrmpan exposed to the air, but close it, with the tympan almost in contact with the type. If left wide open during damp

Digitized by VjOOQiC

weather, the paper on the tympan may absorb moisture and warp to such an extent as to spoil the make-ready.

201. Impression. —^There is diversity of opinion among pressmen as to what constitutes a perfect impression. Should or should not the sheet show any impression on the back? There are so many factors entering into this question, that it can only be answered after special consideration of each particular case. In general, some impression is absolutely necessary to press the ink firmly against the paper. If the paper is soft and yielding the impression is bound to show. If the paper is hard and non-absorbent it requires a stiff ink;

this necessitates considerable squeeze to set the ink firmly on the paper. Here, also, the impression is bound to show. A soft packing will show the impression regardless of other conditions. A hard packing, with smooth paper, good type, and good ink, should show but little impression. It will thus be seen that type, ink, stock, and packing all enter into the question. There is only one factor here over which the pressman has any control— packing. If possible, he should have a hard packing. The pressman must take what type and stock is given him, and use ink suitable to both. With this handicap against him he is supposed to produce perfect work. This is where his knowledge and skill count, for his troubles are legion.

202. The T3nnpan. —^To the uninitiated it would seem that a hard tympan, or packing (see Section 194), would wear out type much quicker than a soft one. Just the reverse is true. It is surprising to find that a thin piece of paper placed beneath a thick pressboard will bring up low places in a form. Yet such is the case. If type is in perfect condition and not rounded on the edges, any smooth, level surface that is pressed firmly against it wDl yield a perfect impression. This is what a hard tympan does. Some pressmen use a thin sheet of copper or zinc instead of pressboard. If the type is rounded or worn a hard tympan will not touch the edges, and a soft or yielding one becomes necessary. Never use a soft tympan if a hard one will do, for, while it will bring up letters that are already rounded, it is also

Digitized by VjOOQiC

the cause of that rounding. It is obvious that if tjrpe is being embedded in a soft packing the wear is all on the edges, which will be gradually rounded.

203. Inserting the Form. —^The first step in the process of getting a job ready for printing is to insert the form in the press. Open the press to its fullest extent, at which time the rollers will be at their lowest point, and clear of the form. Insert the form (being very careful not to strike the grippers), and clamp it in position. Next, move the grippers, if necessary, so that they will clear the form, but be sure that they are tight before leaving them. If the draw-sheet used on the previous form will do for the present one, strip off all guides and fenders. Then remove the previous make-ready (retaining it for future use if the job is to be kept standing), insert enough sheets to make up for those removed, and proceed with a new make-ready. All the manila sheets on the tympan should be clamped beneath the tympan-bales. Always be sure to put the job in the press with the quoins at the top. If, for any reason, the form is removed from the press or its position changed after the grippers and guides have been set, be sujre that the form does not strike them.

204. Make-ready. —^The material of which printing forms are composed (type, rule, borders, ornaments, illustrations, etc.) is seldom, if ever, of uniform height. In order to secure a firm and even impression of this material on a sheet of

paper, it is necessary to go through an operation known as making ready. The first step in this operation is the ptilling of a trial sheet. This sheet is examined in a good light, and the impression noted. Where the impression is weak, the spots are outlined with lead-pencil marks, and patches are subsequently pasted thereon. This is known as spotting up. More than one spot-up, or patched sheet, is usually required before the form is ready for printing. The resultant series of patched sheets is called a make-ready.

A pressman will sometimes place one sheet of make-ready beneath the type or form in order to make everything level.

Digitized by VjOOQiC

When this is done that part of the make-ready is called an under' lay. The part that is placed on the tympan is called an overlay.

Inasmuch as it is impossible to tell just how much impression is being exerted by the type against the sheet if the type is flooded with ink, the pressman should see that there is too Uttle rather than too much ink on the press. Many a pressman has frittered away time because he used too much ink when making ready, only to find that when the color (amount of ink) was properly adjusted for printing the job the form was breaking away, and he was compelled to stop the press and spot up another sheet. If the previous job on the press required a great deal of ink, remove about half of it

from the plate, and thoroughly distribute the balance.

Before taking the trial impression, the tympan, or packing, should be arranged. Pressmen differ as to the proper method of doing this. One good way is to have three or four sheets of manila paper clamped beneath the tympan-bales. Between the bottom sheet of manila and the platen place three or four sheets of the same stock as that on which the job is to be made ready. Pull an impression on each manila sheet as a guide for placing the make-ready sheets.

When the trial impression is secured the sheet should be be held to the light and examined on the back. If the type is punching through at any point it is evidence that there is something beneath the type. This must be removed, the form should then be opened up, re-planed, and again locked up.

If examination of the sheet does not reveal any type punching through, but, instead, certain areas lacking impression, these low places should be marked as a guide for patching or spotting up. These low areas or places are to be covered with patches of thin paper (usually French folio) in order to make them level with the high spots. The lower the spot the more patches required.

In order to properly see the impression the pressman should hold the sheet to the light, about on a level with the eyes; he should then mark on the back of the sheet the outlines of the

Digitized by VjOOQiC

low areas, using a heavy crayon or pencil for this purpose. Sometimes three or more patches may be necessary on an extremely low place, each succeeding patch becoming smaller as it nears the center. The outlines for these patches are to be marked on the sheet. After all of the low places are marked on the back, the sheet should be turned over and examined on the face. The back of the sheet should be placed in contact with a sheet of carbon paper or put on the ink-plate of a press, and the low places on the face gone over with a pencil. This will leave marks on the back of the sheet.

The sheet is now ready for patching. Having secured some French folio, a little paste, and a sharp knife, put a little dab of paste on the smallest area first, stick on a piece of French folio, and with the sharp knife cut the folio to the outline shown by the pencil-mark. If more than one patch is required on a low area, each succeeding patch covers the smaller one, so that when the patching is complete the lowest spot in that area has the greatest number of patches. Do not use much paste; just enough to make the paper stick. Paste on the large patches with a series of finger-dabs aroimd the edges and with a few in the center.

When this spot-up sheet is ready, cut oflF two diagonally opposite corners close to the printing, raise the upper tympan-bale, lower the top sheets, and paste this make-ready in register with the impression that was pulled on the lowest

manila sheet. Take out a sheet of the loose stock near the platen. Put the tympan sheets down smoothly and carefully, clamp the tympan-bale, and pull another impression. The job should now be fairly level, with some low places still in evidence. Go over this sheet the same as you did the first. Should a third spot-up be necessary, follow the same routine. When everything is printing clearly and distinctly on the face without showing much impression on the back, the make-ready is complete. After the job is fully made ready, remove a few of the loose sheets near the platen and place the pressboard just beneath the draw-sheet. This will give a good, firm impression.

Digitized by VjOOQIC

To avoid all risk of getting the spot-up sheets out of register, always release the tympan sheets by opening the same tympan-bale, preferably the top one. The upper sheets can be rolled down out of the way while pulling impressions on the manila sheets or for placing a spot-up sheet in position.

K an occasional letter is so low that it makes no mark on the sheet, it is evident that it is badly worn. Have it changed at once. If it cannot be replaced with a better one, but must be used, paste enough layers of paper on the bottom of it to make it type-high.

, Badly battered corner

(^Beveled cardboard patch, same size and shape as the batter. If this patch were pasted on the battered corner of the letter It would restore



Fig. 137.—Showing How to Bring up a Badly Battered Letter.

Occasionally a single letter will be badly battered on one corner, and there will not be another letter in the office to replace it, hence it must be used. With a little ingenuity the pressman can make the impression given by it presentable. It may be necessary to overlay the battered corner with a piece of cardboard, but the cardboard patch should be beveled at the same angle as the batter so that it will push the sheet down and just touch the corner of the letter, but not punch through the stock. (See Fig. 137.)

205. Overlaying.—The process of making ready halftone

plates is known as overlaying. Besides the cutting of overlap's by hand, there are a number of mechanical methods of making

orgitized by VjOO^iC

them, several being patented. In order to obtain a gradation in tone values throughout the picture, certain parts of the plate require more impression than others. The deep shadows require the most, the high-lights the least. Between these two extremes the impression should be varied by the number of sheets of overlay used, ranging from about three or fouj: in the shadows to none at all in the high-lights. The half tones take about two sheets of overlay. To make a hand-cut overlay, pull about half a dozen impressions of the plate on French folio or "dry proof paper." Use one sheet as a background on which to paste the cutouts. Cut closely and carefully around the outline of each deep shadow and paste the cutout in proper position on the background. Do this with all the parts that need overlaying, putting on the requisite number of layers for each place. This must be very accurately done, for if any part of an overlay overlaps a part that does not require it, the effect will be spoiled. After the overlay is completed, it should be pasted on a tympan sheet in register with an impression that has previously been pulled.

In the other methods of overlaying this gradation is secured by mechanical means. Some of the processes are secret,

some are rather elaborate. Anyone interested in mechanical overlays should consult "The American Manual of Presswork," page 34.

206. Guides.—^After the job is satisfactorily made ready, the guides must be set. There are a number of gauge-pins on the market, but the old-fashioned three-em pica quad seems to be holding its own in popular favor. A tympan-gaugCy consisting of a sheet of transparent celluloid with ruled lines printed thereon, affords a quick method of determining margins. An equally good one, however, when the job is to be printed in the center of the sheet, is to pull an impression on the draw-sheet, take a sheet of the stock on which the job is to be printed, and lay it on the draw-sheet with the edge of the paper against the upper edge of the printed matter. This will leave all the margin at the bottom of the stock. As only half of the margin is wanted at the bottom, fold the sheet back until its edge touches

Digitized by VjOOQiC

the bottom of the printing. The new edge of the paper is the proper margin. Make two pencil-marks in the lower margin on the draw-sheet, one near the'top of the job, the other near the bottom, and draw a line parallel with the lower edge of the job. This is where the bottom guides are to be placed. Proceed in the same manner for the side guide, and mark its position. (See Fig. 138.)

Procure three three-em pica quads. Place a little liquid glue on one of the broad sides of each quad, rub it lightly over a sheet of paper to distribute the glue evenly, wipe off all the

Drav-ebeet

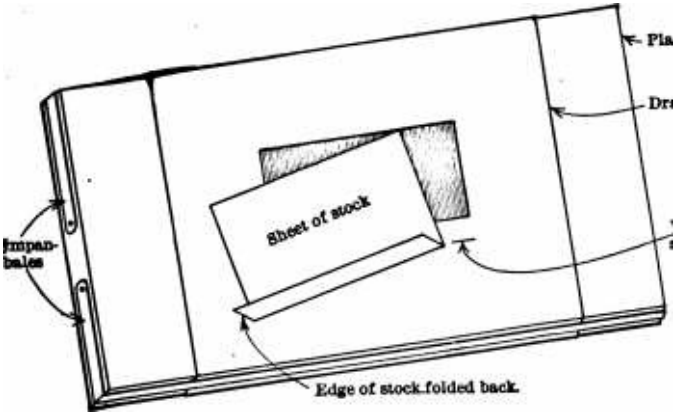

^ Where the guide

Xj3ttpan-\ \ \ \ ^^ ^-""'O^'^r \ ^^^--'^should be placed.

e of stock^olded back. Fig. 138.—Setting Guides.

glue from the top narrow edge where the sheet will touch, and put the quad on the draw-sheet in proper position. Place all three guides in this way, pressing them down firmly. Do this quickly; then pull a sheet, and test the margins at once. To do this, fold the sheet in half, hold it to the light, and see if both margins are the same. If not, note which way and how much either one or both guides must be moved, and move

them before the glue has had time to set. Determine the head and foot margins in the same manner. The guides should be moved an the direction opposite to that in which the printing should go. If the printing should go down, move the guides up; if the

Digitized by VjOOQiC

printing should go up, move the guides down. With a little experience the proper setting of guides should be accomplished before the glue has had time to set.

After the guides are in proper position some precaution must be taken to keep the edges of the sheets from cutting

Y-shaped slits in the draw-sheet



-Fenders -Fig. 139.—Showing Guides and Fenders in Position.

between the guides and the draw-sheet. This is accomplished by making a V-shaped slit in the draw-sheet, the V pointing toward the guide, and slightly raising the point of the V. As an additional safeguard, and also to firmly anchor the quad to the draw-sheet, a strip of gummed paper should be pasted beneath



Gummed manila paper.

Fig. 140.—Showing V-slit and Quad Guidei Held Down with Gummed

Manila Paper.

the V and carried completely over the three sides of the guide and out over the draw-sheet for a distance of about one inch. The gimamed manila paper used for binding parcels is excellent for this purpose. Figs. 139 and 140 will make clear the preceding explanation*

Digitized by

Google

Two sets of quad guides should be kept on hand, one set soaking in water while the other is in use.

If the job is a large one, with ample margins, grippers should be used to keep the sheet against the tympan after printing; if it is a small one, little pieces of cardboard, called fenders (see Fig. 139), are usually sufficient. A fender is simply a strip of stiff cardboard, bent at a slight angle, and glued to the draw-sheet. The bent part of it stands up slightly from the draw-sheet, and the stock can be slid beneath it. It serves to prevent the form from pulling the stock away from the draw-sheet. Fenders should be placed on the guide sides of the sheet, and at some point in the margin where they will not strike the type.

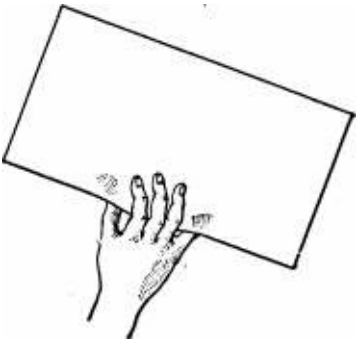

Fig 141.—Bowing a Sheet to Stiffen it so that it May be Fed into the Press.

207. Feeding a Press. —The manner in which a sheet should be fed into the press depends on the size and shape of the sheet. If the paper is fairly heavy and not too large, it can be

grasped by the thumb and fingers of the right hand, bowed slightly without crimping, and pushed up to the guides (see Fig. 141). Never grasp a sheet firmly enough to leave a permanent crimp or buckle in it. If the sheet is thin or unwieldy, or cannot be fed without crimping or buckling, a method known as "flying'* must be resorted to. To fly a sheet, turn the paper upside down on the feedboard, and "fan" out the pile by rubbing the thumb-nail over the top of the pile.

Digitized by VjOOQiC

This will cause the sheets to project slightly (like the leaves of a fan), so that the edges may readily be grasped. Grasp the edge of the top sheet between the thumb and index-finger of the right hand, supporting the body of the sheet with the other fingers, and turn it completely over, at the same time swinging it from the feedboard into position on the tympan, and pushing it up to the guides. (See Fig. 142.)

The printed sheet is withdrawn with the left hand at the same time that the plain sheet is being brought over with the right. Some pressmen insert the plain sheet partly in the press

Second position

First position

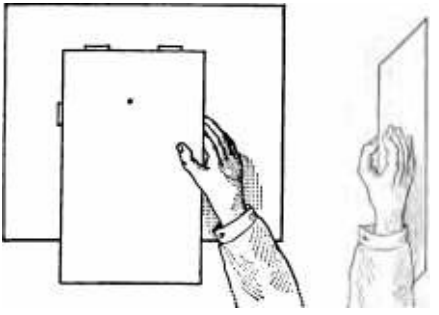

Sheet on tympan right side up.



Sheet in midair, half-turned over.

Paper on feedboard, upside down. Pile "fanned" out.

Fig. 142.—Successive Steps in Flying a Sheet.

before the printed one is withdrawn. This is a very bad

habit, for in nine cases out of ten the edge of the incoming sheet will touch the ink on the printed sheet and be soiled. This will not be detected until the sheets are straightened. They must then be trimmed to get clean edges, sometimes to the detriment of the margin, and always at additional expense for trimming Moreover, striking the printed sheet may mark the back of the plain sheet and give it the appearance of offset.

If it is impossible to withdraw the printed sheet before the plain one reaches the press, raise the printed sheet and feed the plain one beneath it, not over it. This will prevent soiling.

Digitized by VjOOQiC

If you have trouble in withdrawing the sheet because the fingers slip over it, either fasten a piece of sandpaper to one finger with a rubber band, or moisten the finger occasionally on a piece of rag saturated with glycerine. Do not wet the finger with spittle. Such practice is unhygienic.

There is a difference between the two sides of every sheet of uncoated paper. This is due to the fact that it is almost im-

FiG. 143.—Drying-racks and Frame.

possible to eliminate the mark of the wire screen from one side of the paper (see Section 243). The rough side is the wire side, the smooth side is the felt side. With some papers this differ-ence is so pronounced that to print on the wire side would spoil the job. Examine the stock carefully before printing on it.

208. Dr3ring the Sheets. —If the form is a light one or the stock absorbs the ink readily, the printed sheets may be piled

Digitized by VjOOQiC

without "offsetting"; that is, without the ink on one sheet marking the back of the sheet above it. If there is danger of offset do not pile the printed sheets, but lay them out on drying-racks (Fig. 143), in such manner that one sheet does not touch the printing on the other. Letterheads can usually be overlapped, somewhat after the manner of laying shingles on a roof. If the job is a small one, and from twenty to thirty piles can be laid out on a drying-rack, begin at one corner of the rack and lay off as many piles as the rack will hold. By the time the sheet for the last pile has been laid the first sheet placed on the rack should be dry enough to hold another sheet without offsetting. Go over the piles in regular order. Watch carefully for offset. If it occurs, the job must be slipsheeted as directed in the following section.

209. Slipsheeting. —^When one printed sheet offsets on the next it is necessary to sUpskeet the job. This consists in putting sheets of some rough-surfaced stock between the printed sheets, placing them alternately, first a printed sheet then a slipsheet. Paper known as heavy news is frequently used, but oiled manila is much better and lasts longer. Never use enameled paper for slipsheets, or the sheets will stick together. Inasmuch as it requires the services of a boy to put the sheets in and take them out again, slipsheeting is never resorted to if it can be avoided. Sometimes a press-feeder can put the slipsheets in while he is nmning the job, but usually at a sacrifice of speed. If the job can be put out on a rack in layers, each layer can be slip-sheeted by the feeder. The slipsheets should be within reach of the feeder's left

hand. As he finishes each layer he can quickly catch a slipsheet and place it without missing an impression.

210. Envelopes. —If an envelope be held to the light it will be seen that certain parts of it overlap, producing one or two extra layers of paper. If the printing strikes at such a point a cutout must be made from the envelope itself and pasted on the tympan so that there will be equal thicknesses of paper at all points. (See Fig. 144.)

Digitized by VjOOQiC

Before making the cutout, the job should be made ready as if for a plain sheet, and the guides accurately set. If the envelopes are to be opened, and the printing does not strike any of the overlapping parts, no cutout is necessary. If the envelopes are not to be opened, and a cutout is required, remove a few sheets

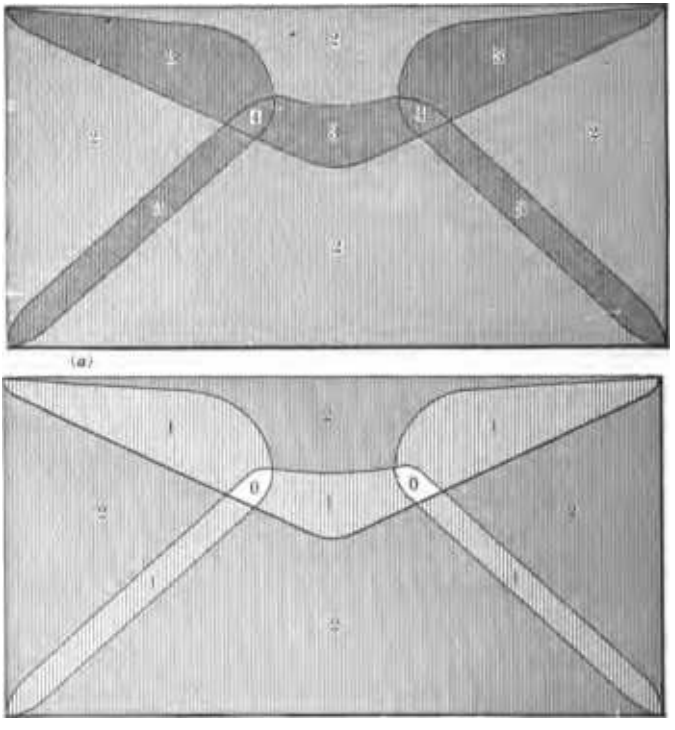

^*) Fig. 144.—Envelope Cutout.

(a) shows the appearance of an envelope when held to the light. The figures indicate the number of thicknesses of paper at each overlapping part. (6) shows a cutout, the figures indicating the number of thicknesses of paper that must be retained, so as to produce an equal number of thicknesses of paper when the envelope and the cutout are placed into register.

of loose packing so that the printing will not punch through the envelopes and injure the type, and pull an impression to

see where the printing strikes. If it be a corner card, and the printing does not strike the place where the envelope is glued together, but does overlap the side section, printing into that part where there is but one thickness of paper, proceed as follows:

Digitized by VjOOQiC

slip the flap into the envelope and cut away the end of the flap by following the outline of the upper edge of the back of the envelope, using a sharp knife. Now cut away the entire back of the envelope, being careful to preserve the full outline or dimensions, retaining nothing but the front of the envelope and the remaining section of the flap. The cutout should now be placed in position. Place a perfect envelope on the guides and draw a pencil-mark on the draw-sheet along the bottom and side of the envelope. Remove the envelope and stab a few holes along this pencil-mark as a guide for placing the cutout on the sheet beneath. Raise the upper t)mipan-bale, lower the draw-sheet, and paste the cutout on the first manila t)mipan sheet below the draw-sheet. Replace the draw-sheet, and pull an impression. If the work has been carefully and properly done, the printing should present a imiform appearance.

If the envelope has a printed address, covering the lower half of it, make it ready as if for a plain sheet of paper, set the guides, and cut out the two parts where the sides and bottom are glued together, following the outline closely. Put

the cutout in position on the manila t)mipan sheet as described above.

Any envelope can be made ready in this manner. In making a cutout it is simply necessary to have enough pieces of paper of proper shape in perfect register, so that when the envelope and the cutout are placed in position they will give an equal number of layers of paper. If the envelope has four thicknesses of paper at one point, three at another, and two at another, it will be necessary to add two pieces to the two layers, one piece to the three layers, and have none at all where there are four layers. When making such a cutout use one of the envelopes, so that the outlines may readily be followed. If the envelopes are to be fed closed, gima the flap fast to an envelope, and where the four layers occur, cut away the whole four layers; where the three layers occiu:, cut away two, retaining one; where the two layers occur, retain them both. This will leave one layer over the three layers, making four, and two over the two, making four. When the cutout and the envelope are put into register and held to the

Digitized by VjOOQiC

light it will be found that they present a uniform tone. Put this cutout in position as described above.

211. opening and Closing Envelopes.— The printing of envelopes is very hard on type, owing to the particles of gum

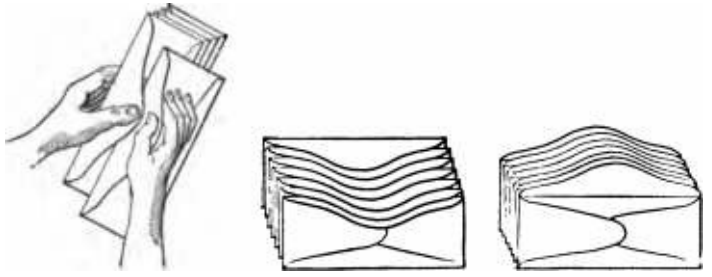

Slip one flap under the next.

A whole pack with flaps overlapping.

Fig. 145.—Method of Opening out Envelope Flaps.

Flaps bent back so that envelopes will lie flat.

that frequently stick to them. If the price obtained for printing them admits, it pays to open out the flaps before printing. Fig. 145 illustrates how this should be done. Grasp a pack (of twenty-five) in the left hand and bend the envelopes back

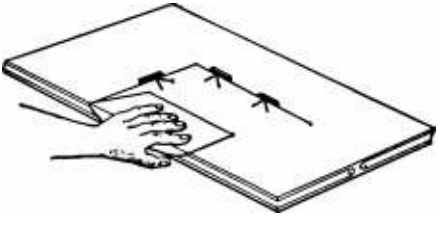

Fig. 146.—Showing How Envelope Flap May be Closed

while Withdrawing Envelope from Press.

slightly at the top so as to raise the flap of the top one. Grasp the upraised flap with the thumb and fingers of the right hand, slip the top of the envelope beneath the flap of the one beneath, and push it completely under. Grasp the flap of that one, and proceed in like manner until the flaps of the whole pack have

Digitized by

Google

been slipped one under the other. Raise the flaps and bend them back far enough to cause the envelopes to lie straight. With a little practice this can be done very quickly.

The envelopes may be closed while in the act of taking them from the press. Withdraw the envelope with the left hand by sliding it up the t)mipan. As the flap projects above the edge of the tympan, close it with the thumb, (See Fig. 146.)

212. Frisket. —Owing to the fact that parts of a form sometimes become inked and mark the printed sheet, it is often necessary to resort to the use of bl frisket. This is a sheet of manila paper stretched tightly between the grippers and glued to them. An impression of the form is pulled on the manila sheet, and holes are cut in it so that the type may go through and print on the sheet beneath.

213. Registering. —Registering seems to be about as puzzling to the beginner in presswork as imposition is to the average compositor. The fact that everything is in reverse seems to confuse. If the job is too low on the sheet, the guides must be moved down; if it is too high, they must be moved up.

When printing a job in more than one color, pull plenty of register-sheets of the key-plate or form, and register each succeeding color into the key-form. Registering can be facilitated by pulling an impression on the draw-sheet, oiling a register^ sheet so that the impression can be seen through it, and then moving the register-sheet until it is in register with the impression on the draw-sheet. Draw a pencil-line aroimd the guide sides of the sheet, and mark the position of the guides (a register-sheet having been marked and preserved for this purpose). Have the guides in the same position for all the colors.

Difficulty is sometimes encountered in registering vignetted, three-color halftone plates in the center of a large sheet, especially if thi job is a small one. Owing to the fact that there is no ciramiscribing outline, some prominent point in the center must be taken as a registering-point. For a trial register, set the guides as before described. If one place is in register, and the balance of the job seems to swing around that point as a center.

Digitized by VjOOQiC

Stick a pin through that central point, remove the guides, and very carefully swing the sheet the required amount. Replace the guides. The reason for removing the guides is that one of the bottom guides must go down and the other up when a sheet is swung aroimd a center. Moreover, the side guide would be crooked. A movement of two points near the center of a sheet may require a movement of ten points at the guides.

214. Slurring of Rule Jobs. —^When a job is completely surrounded by rule and all the corners are perfectly joined, the pressman is frequently troubled by his inability to overcome slurring, that is, producing a double mark on the sheet. This slurring is due to the air which is compressed inside the rule border at the moment the sheet touches the nile. The air is forced out over the edges of the rule, causing the sheet to move slightly and resulting in a slur. This happens more frequently on a press with a sliding platen. It can be obviated by drilling a couple of holes through the rule as an outlet for the air.

215. Embossing. —Embossing is the pressing of paper or thin cardboard between a pair of dies so as to leave the design in relief. The first essential is the die, which is usually of brass and hand cut. All the details that are to appear on the face of the finished product are cut into the brass plate. If the plate is not type-high, it is mounted on an iron base. The best way to mount a plate is to attach it with screws to the iron base. Lacking this, the next best (and

usual) way is to coat one side of a strip of heavy manila paper with glue, and wrap it about the iron base until it has been built up to the proper height. Then glue the brass plate to the manila paper, holding it under pressure until firmly set. As embossing requires considerable pressure it should only be attempted on strongly built presses.

After the glue is thoroughly dry, the plate should be locked up in a chase and damped on the bed of the press. The next step is the making of the counter. This is done by the pressman in various ways, one of which is as follows: strip off the tympan, leaving the platen bare. Glue a sheet of ^trawboard to the platen. While the glue is setting, mix a little Alabastinc

Digitized by VjOOQiC

with enough liquid glue and sodium silicate (soluble water-^lass) to make the compound of about the consistency of putty. Smear this in a fa'rly even layer on the strawboard in such position that it will cover the die. Oil a sheet of tissue or French folio paper and cover the composition with it. Go over the inside of the die with an oily rag or dust it with French' chalk (powdered soapstone) to prevent the composition from sticking to it if the oiled paper should break. Start the press and apply the pressure gradually, letting the press go over once, with a lingering squeeze. Remove the oiled sheet and examine the counter. If it has failed to fully fill the deep parts of the die, apply a little

more composition where it seems to be needed, cover with an oiled sheet, and pull another impression as before. If the counter is now perfect, trim off the surplus composition while it is still plastic, cutting it away entirely where it is not needed. Allow room on the strawboard for the guides.

Leave the press wide open so that the composition will harden quickly. It is better to make the counter just before leaving in the evening, so that it may harden overnight. It should be as hard as stone in the morning. If the counter has any sharp or rough places that seem to break or tear the stock, they may be smoothed with fine sandpaper.

Another method (which the author has seen highly recommended, but which he has never tried) is to use an old talking-machine disk. Soften this by the aid of the heat from a painter's gasoline torch or a Bunsen burner, and make the counter while it is in a plastic condition. If the first strike is not a complete success, soften it again and add more impression. This hardens at once.

216. Perforating. —^Perforating-rule comes in two heights—type-high and slightly higher. When it is run in type forms, it should be just type-high. The cutting-edge is sharp, and if it sticks up above the type, there is nothing to prevent it from cutting into the rollers and ruining them. It will also cut into the draw-sheet and pile up an aggregation of ink in the perforations. Even when the rules are type-high they should, if possible^

Digitized by VjOOQiC

project beyond the edge of the printed sheet, and each end should be abutted with a short piece of three-point face-rule to prevent the ends from cutting the rollers. The three-point rule can be prevented from marking the draw-sheet by using a frisket.

It would be an improvement if perforating-rule were slightly lower than type-high so that it would not touch the rollers at all. A thin sheet of zinc or brass imder the draw-sheet could be used to give the required impression for a dean cut. Of coiurse, this would not be feasible if type came very close to the rule.

217. Scoring.—^All machine-made papers have what is known as a grain. That is; the sheet will fold and tear more readily in one direction than the other. The grain runs the length of the stock on the paper-making machine, and usually the long way of the sheet. It is impossible to fold some cover stocks across the grain without cracking them. When the stock must be folded in that direction it must be scored. This consists in mashing the fibers with a thin, blunt edge. A piece of brass rule is usually used for this pxupose, being locked in a chase in proper position. As no printing is to be done the rollers should be removed. The make-ready consists in adding sheets to the tympan until the rule mashes the stock just enough so that it will fold without breaking, but not until it is sufficient to cut it. If the stock is a cover for a book, two

scoring-rules may be necessary, the distance between them being equal to the width of the back of the book. All scoring should be done on the outside of the sheet. If there is printing on the inside of the sheet it should be done before the scoring, as the scoring has a tendency to bend the sheet.

Scoring and printing can be done at one operation. If the printed mark made by the scoring-rule is objectionable, it can be prevented by the use of a frisket. (See Section 212.^ It seldom shows after the sheet is folded.

218. Cutting and Slitting.—Slits and cutouts of various sizes and shapes can be made on a platen press by the use of steel cutting-rule assembled into proper form. If the outline is not rectangular, the usual method is to lay out the shape in

Digitized by VjOOQIC

lead-pencil on an old electrotype block from which the plate has been removed. The block is then cut along the pencil-marks with a jig-saw, and the cutting-nile bent to fit the saw-cuts. The block is then locked up in a chase. Cutting-rule is of just the right temper so that it may be bent without breaking;* it should be severed with a three-cornered file.

Best results are obtained when the cutting-rules strike against

a thin sheet of zinc or brass placed under the draw-sheet on the tympan. If the piece of stock that is cut out sticks in the cutting-die instead of falling to the floor, a few pieces of cork

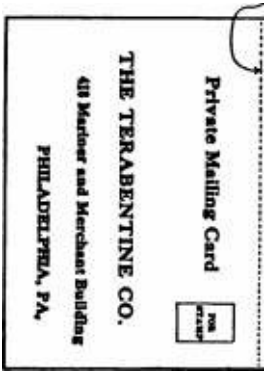

-P^foraOng-nile



The Terabentine Co.

418 and 419 Mariner and Merchant

Building PHU.AJ>ELPHIA, PA.

Yours — perhaps?

Fig. 147.—^A Job that was Printed, Cut, Scored, and Perforated at One

Operation.

glued to the block near the rule will eject it. A sheet of heavy paper on the floor to catch the cuttings will facilitate cleaning up after the job is finished.

219. Printingy Cutting, Scoringi and Perforating at One Operation. —By the exercise of a little ingenuity, the pressman can frequently accomplish several things with one impression. In Fig. 147 is shown a job that was printed, cut, scored, and perforated at one operation.

An impression of the job was first pulled and all the type underlaid; then the rules were all pushed down so that they woxdd not take ink. The rollers were raised so that they would

Digitized by VjOOQiC

not mash into the type. The job was made ready and enough impression put on the various rules to make them cut, score, or perforate, as required. When working a job of this kind if there is difficulty in getting the flap up after it is cut and scored, a piece of springy cardboard glued to the draw-sheet will serve to open it.

220. Printing a Two-color Register Job by the Aid of a Frisket. —Fig. 91 shows a two-color job for a tally-card, the various parts of which had to be k^pt in perfect position. Such a job is difficult to set, and more difficult to skeletonize. There is really no need to skeletonize it, for it can be kept intact and printed by the aid of a frisket. Pull a proof of the job on light cardboard and cut out the type not desired. Paste this on the back of the form, in perfect register, then lay the form on the stone, unlock it, and push down the type not desired, plane the form, and lock it up again. Strips of the same cardboard should be glued to the roller-tracks to raise the rollers. Take out enough packing from the tympan to compensate for the thickness of the cardboard imderlay. Make the job ready. Cut a frisket so that only the printing desired will be impressed on the sheet. If the other parts do print slightly the ink will get on the frisket, not on the sheet.

After the first color is completed, wash up the press, put up the other color, cut a new underlay, just the reverse of the first, bringing up what was down, pushing down what was up, make a new overlay and a new frisket. Be very careful not to displace the draw-sheet^ thereby altering the guides. The job will then be in perfect register.

221. Washing Up. —It is generally conceded that the best solution for washing rollers is kerosene. It is not inflammable at ordinary temperatures, as is benzine and

gasoline, and it leaves a certain amount of oiliness on the rollers that is conducive to long life. Benzine evaporates quickly, and frequently takes the suction with it.

Benzine is in high favor with compositors for cleaning type because it evaporates at once, and, if necessary, another proof

Digitized by VjOOQIC

can be pulled very shortly after washing the type. This is impossible with detergents of an oily nature. Type that is frequently washed with benzine finally becomes encrusted with dirt, and a lye bath is then necessary for a perfect cleansing.

222. Removing Hard Ink from Rollers and Press. —When rollers and presses are neglected or not thoroughly cleaned, they become encrusted with hard ink. This also happens with ink-knives and ink-slabs. There does not seem to be anything quite so efficient for softening these incrustations as dead'oU. This is a gas-house product, with a characteristic odor. Carbon tetrachloride is also recommended for this piupose.

223. Safety Devices. —Only within a comparatively few years has it been recognized that every member of our complex social system has a definite productive capacity and monetary value, and that the maiming or the shortening of the

life of an individual is just so much loss to the community at large. Legislators have taken up the matter, and laws are being passed compelling employers of labor to safeguard their workmen. No piece of machinery that in any wise jeopardizes the life or person of the attendant should be permitted to be used without proper safety attachments. Printing machinery is particularly dangerous.

All exposed gear-wheels on printing-presses should be encased, so that it will be impossible for the attendant to be caught, no matter how careless he may be. Flywheels should be covered with sheet-iron on the outside so that no one can get between the spokes.

There is hardly a printing office that has not at least one pressman or feeder who, at some time, has not had a finger (perhaps a whole hand) mashed in a platen press. There are now several devices on the market that will lift the feeder's arm out of the way in time to avoid accident. Every press should be equipped with some such device. Fig. 148 shows a device for this purpose. True, attendants are frequently very foolhardy; they will take big chances to accomplish something without stopping the press. Sometimes safety attachments are thrown

Digitized by VjOOQiC

back or out of use. Don't take stick risks. If something serious should happen, it will necessitate a much longer stop, and it

may mean a painful and permanent disability. No amount of safeguarding will prevent an accident unless there is intelligent co-operation on the part of the workman.

While this chapter is devoted to platen presses and not to cylinder presses, the author cannot refrain from telling of two accidents and one near-accident on cylinder presses with which he was personally acquainted. The two accidents happened in precisely the same way, one of them seriously. In both cases the pressman was trying to remove something from the form-

FiG. 148.—Sylvester Safety Device for Job Presses.

rollers while the press was running, and just at the moment of reversal each had a hand and arm drawn between the rollers. Fortunately, in one case the feeder stopped the press immediately by throwing off the power and pressing his body against the flywheel. This accident resulted in a badly sprained hand. The second pressman was not so fortimate. His arm was drawn in up to the elbow, necessitating

amputation.

The near-accident occurred when a machinist was working beneath a cylinder press and pushed his foot against the back-up lever. He didn't know he was doing it, but thought someone

Digitized by VjOOQiC

was starting the press. When he moved to get out of harm's way he removed the cause. Moral: never get under a cylinder press to fix anything or clean up while the power is attached. If it is belt-driven, throw off the belt; if it is electric-connected, pull out the fuse.

If you are running a power cutting-machine, keep your eye on the vicious knife-blade imtil it comes to a full stop. Under no circumstance be tempted to reach under the knife imtil you know you are safe. This is the one dangerous machine that cannot well be guarded. You must be your own guardian.

Never wipe around any kind of press while it is in motion. Keep in mind the slogan, "Safety first!" Remember also, that a careful workman is the best safety device.

QUESTIONS ON CHAPTER XIV

1. What is a platen press ?

2. Describe the different types of platen presses.

3. Which part of the press is the bed ?

4. Which part of the press is the platen ?

5. What is a tympan ?

6. What is the draw-sheet ?

7. What are the grippers ? Why are they used ?

8. Of what use are roller-bearers ?

9. What ingredients are usually used in composition rollers ?

10. Why is it necessary to vary the ingredients during the different seasons of the year ?

11. Describe the physical characteristics of a roller in perfect condition.

12. What causes some inks to have a deleterious action on composition rollers ?

13. Why is it necessary to change the gudgeons on composition rollers ?

14. What special care should you exercise when oiling a press ?

15. Why are forms containing wooden furniture usually loose

after standing for some time ?

16. Why should rollers not be allowed to stand in contact with form or :nk-plate for any length of time ?

17. Should or should not a printed sheet show any impression ?

18. Which is better, a hard or a soft packing ?

19. What causes type to wear round on its edges ?

ao. What wiU prevent type from wearing round on its edges ?

Digitized by VjOOQiC

21. If type is rounded on its edges, how can we get it to leave a perfect impression on a sheet ?

22. Describe how you would place a form on a platen press, telling what each move is intended to accomplish or avoid.

23. Should the quoins be at the top or bottom of a form ? Why ?

24. What do you understand by make-ready ?

25. Give a full description of your method of making a form ready for printing.

26. Why is it inadvisable to carry much ink while making a form ready ?

27. What is an " overlay " ? an '* underlay " ?

28. Why is it advisable to open the upper tympan-bale instead of the lower one when pulling impressions on the tympan sheets and when placing the make-ready in position ?

29. Describe the making of a hand-cut overlay for a halftone.

30. What is a tympan-gauge ?

31. Describe the setting of quad guides on a platen press.

32. Why do we make V-shaped slits in the draw-sheet near the guides ?

33. What is a fender ? Why is it used ?

34. What do you understand by buckling or crimping a sheet as applied to press-feeding ?

35. How would you " fly " a sheet when feeding a press ?

36. What will happen if the incoming sheet rubs over the surface of the printed sheet as it is being withdrawn from the press ?

37. If you were having diflSculty in withdrawing sheets from

the press, how would you overcome it ?

38. How can you distinguish the right from the wrong side of the paper ?

39. What is oflFset ?

40. How should letterheads be laid out to avoid offsetting ?

41. Why is it necessary to slipsheet a job ?

42. What kinds of paper may be used for slipsheets ? What kinds may not be used ?

43. Describe the making of an envelope cutout.

44. Describe how the flaps of envelopes should be opened.

45. How may the flaps of envelopes be closed while in the act of drawing the envelopes from the press ?

46. What is a frisket ? How is it made, and why is it used ?

47. When printing jobs in more than one color why is it necessary to have the guides always in the same position for every sheet ?

48. Describe a method of getting a small job in register in the center of a large sheet.

49. How would you prevent a rule job from slurring ?

50. What is embossing, and how is it done ?

51. What is perforating-rule ?

Digitized by VjOOQiC

52. Is it an advantage or a disadvantage to have perforating-rule higher than type-high ? Give your reasons.

53. What is scoring, and why is it necessary ?

54. If you wanted to print and score at the same operation, how would you prevent the scoring-rule from marking the sheet ?

55. What do you understand by cutting and slitting ?

56. If you wished to make a cutout, irregular in shape, how would you proceed ?

57. If the piece of stock that is being cut out should stick in the cutting-die, how would you eject it ?

58. Describe how you would prepare a form so that you could print, cut, score, and perforate at one operation.

59. How may ?. two-color register job be printed without skeletonizing it?

60. Why is benzine not as good as kerosene for washing rollers ?

Digitized by VjOOQiC

CHAPTER XV PRINTING-INK

224. Composition. —^The object of this chapter on printing-ink is not to give the student a full and comprehensive treatise on its manufacture, but simply to point out a few things regarding it and its use that a printer shoidd know. The manufacture of printing-ink is too complex a process for the average layman, involving as it does a knowledge of chemistry. In general, the ink may be said to consist of a pigment, a vehicle, and a drier. Various other substances are added for specific purposes, but unless one is familiar with the composition of an ink, it is unwise to make additions that may enter into chemical combination with it, for other properties may be imparted that will completely debar it from use. All doctoring of an ink shoidd be done by the maker, or by the use of ingredients made and recommended by him.

225. Pigments. —^There is an infinite mmiber of pigments used in the making of printing-ink, some of them occiming as earths in a raw or natural state, some are burned, some are precipitated from chemical mixtures, and others are made by dyeing a base with some coloring matter. No matter what the process of preparation, the object of the pigment is to give

body and color to the ink. The pigments used in printing-inks vary in tinctorial strength. Ivory black has greater covering power than either carbon black or lampblack. For this reason a high-price ink is sometimes cheaper in the long nm than a low-price one, because, cost for cost, it will cover a larger area than will the low-price one.

226. The Vehicle. —The vehicle which carries the pigment and permits it to be rolled out and spread thinly over a surface,

is varnish. Varnishes for printing-inks are made from rosin-oil and from linseed-oil, the better grades being made from the latter. Linseed-oil is obtained from the seeds of the flax plant. The seeds are crushed, heated, and put into hydraulic presses which squeeze out the oil, leaving a residue known as oil-cake, which is used as fodder. The seeds are about sixty-five per cent oil. The raw oil is boiled for definite periods, depending on the consistency or viscosity desired. The longer the oil is boiled the more viscid it becomes. It is thus possible to obtain a varnish suitable for mixing ink for almost any purpose. Each particular branch of printing requires a different kind of ink. The inks used in lithography, die-stamping, or intaglio printing are not adapted for letterpress work.

227. The. Drier. —^When linseed-oil, or a varnish made

from it, is exposed to the air it absorbs oxygen and turns to a gum. When a varnish and a pigment are intimately mixed together, each individual particle of pigment is encysted in a covering of varnish. When rolled out thinly and exposed to the air, the varnish dries by absorbing oxygen from the air. This drying can be accelerated by mixing with the varnish some substance that will yield up oxygen to the mixture or cause it to take it up quicker from the air. Such substances are called driers. There are quite a number of combinations used, but one of the best is a mixture of the oxides of lead and manganese. Prussian, Chinese, and bronze blues have a natural affinity for oxygen and dry quickly.

Nearly every ink-maker has his own formula for the making of driers, and it is well to use ink and drier from the same manufacturer. You then know that the drier is adapted to the ink. Driers come in liquid and in paste form. The paste form is considered the better, especially for inks that are to be kept stiff, because it does not thin the ink as does the liquid form.

Soft ink will dry quicker on absorbent paper than on hard paper, because drying is facilitated by the absorptive power of the stock. Soft ink should not be used on hard paper because the paper is not absorbent. Hard papers require stiff inks, and

Digitized by VjOOQiC

the ink should be firmly pressed mto the paper. Stiff inks dry by oxidation; soft inks partly by absorption, partly by oxidation.

228. Pressroom Temperature and Humidity. —^To the uninitiated, the putting on of ink and the printing of a job appears the simplest of operations. So it is when everything is just right. But everything isn't always just right. Every change in temperature or in the amount of moisture in the air alters conditions. Ink that gives satisfactory residts at one temperature may not work well at another. Paper that will not "pick" imder ordinary conditions may peel off on a damp day. The ink may be too stiff or too soft. It may give a mottled impression. It may offset. Sometimes ink will dry on the press while running, but will not dry overnight on paper. In fact, the pressman's troubles are legion.

The time is undoubtedly coming, and is, perhaps, not far distant, when the up-to-date pressroom will be glass-encased, where temperature and himiidity can be kept under perfect control. When this is done a major portion of the trouble will be eliminated. Not only does humidity affect the working qualities of rollers and ink, but it also entails endless trouble in the registering of forms, especially with enamelled papers. Paper forty-four inches long has been known to expand one-fourth of an inch overnight. Nearly every experienced pressman can recount some unpleasant experience resulting from the expansion of paper. The author knows of one job, printed in nine colors on enamelled paper.

It took about two weeks to complete the job, during which time there were many changes of temperature and humidity. If one color ran over from one day to the next, the first day's work would not always register with the next day's work. If the humidity varied from morning to evening, the sheets also varied; so did the register. When the job was completed, about one-half of the sheets were thrown away because they did not register.

229. Adapting Ink to Stock. —In order to produce a p)erfect effect in printing, the ink must be suited to the stock. If the job has many halftones of fine screen, a highly enamelled paper

Digitized by VjOOQiC

is essential. If the coating on the paper is tender, a soft ink must be used to prevent the "tack" of the ink from pulling off the coating. Tfce best plan for overcoming black-ink troubles with halftones on enamelled paper is to have two inks from the same maker, one a soft halftone black the other a stiff halftone black. By a judicious mixing of these two, any consistency required may be obtained. K the stiff ink is too stiff, add the soft ink; if the soft ink is too soft, add the stiff ink. In fact, if the printer be provided with two different consistencies for each color of ink, he can overcome nearly all his troubles. It may be argued that the addition of a thin varnish will accomplish the same result, but such is not the case. If varnish is added to an ink the ink is thinned and its

covering power decreased. More ink is secured but it has less pigment per square inch; on the other hand, if the soft ink as sent out by the maker is used the covering power is retained yet the ink is softened.

230. How to Remedy Ink Troubles. —^A proper appreciation of the changeable composition of a printing-ink and of the multitude of variable conditions that arise during its use usually leads to the best ways of overcoming ink troubles. Every change in temperature produces a change in the consistency of the ink. If the ink gets cold it becomes stiff and causes trouble. To remedy this, the temperature must be raised, or if this is not possible, the consistency must be varied, usually by the use of a thinner varnish, or, better, by mixing the stiff ink with a softer ink. If the temperature rises, making the ink too soft, obviously, it should be mixed with a stiff varnish or a stiffer ink. The proper temperature for a pressroom is between 70° and 80° F.

If the ink pulls off the face of the paper, it is too stiff; it should be softeaed. If it offsets, too much ink is being carried, there is not enough impression on the job, or there is not enough ■ drier in the ink. The remedy in each case is obvious.

If an ink gives a mottled impression, this is evidence that the ink is too thin and lacks cohesion; it needs more "tack." Add heavy varnish, or use a heavier-bodied ink.

Digitized by VjOOQiC

231. Dopes. —^Nearly every experienced pressman has gathered an outfit which he terms "dope." Each of these substances he uses for specific purposes. Occasionally a pressman is foimd who pins his faith to one "dope," which he considers a panacea for all ink troubles. Another will have an array of red, white, and blue powders; paste and liquid driers; castor-oil, vaseline, turpentine, sodiimi silicate, etc. With this battery, he feels competent to tackle any ink trouble that arises. Frequently he would be better off without such so-called remedies. K he is not fully aware of just what action each has imder every condition of temperature and humidity, he is usually groping in the dark. The value of the time wasted by a pressman trying to get an ink to work properly may frequently be more than the cost of an ink that would work properly with out doping.

At the same time, there is no denying the fact that it is not always convenient to stop a press while waiting for the inkman, and the pressman must frequently rely upon his own resources. The novice should, however, undertake to remedy ink troubles only under the guidance of a competent pressman. Unless the pressman is also an ink chemist or knows definitely from previous experience what the result will be, it is rather risky to tamper with an ink by the addition of other materials. As stated before, the safest way to handle the ink problem is to have a stiff and a soft ink of the same color. By a judicious admixture of these two a

suitable ink may usually be obtained. If not, then consult the inkman; the problem is his.

232. Mixing Ink. —It frequently happens that a job is to be printed in a specified color and the pressman is called on to match it. This he can sometimes do by mixing inks that he has in stock. It is a process, however, that calls for a well-developed color perception and a knowledge of color analysis. Here is an extremely interesting field for a pressman who is anxious to get ahead in his work, for a pressman who knows how to obtain a particular tint without wasting time in its produc-

Digitized by VjOOQiC

tion is a valuable acquisition to any office and need never be out of employment.

The student is urged to read and digest Andrews's "Color and Its Application to Printing" and Munsell's "Color Notation." Both of these writers advocate a theory regarding color that is at variance with that usually accepted, but Andrews offers so much that is of practical value that the pressman will do well to read his book carefully. He also gives specific directions for color-mixing.

233. Mixing Tints and Shades. —^The inexperienced pressman will sometimes make the mistake of adding a little white to a large amount of the body color when he wishes to

obtain a tint of that color. This is wrong practice. When mixing colors, always put the stronger color into the weaker, and do so by adding a little at a time. If a tint is to be matched, and it is not known what body color has been used, try the experiment of adding a faint trace of the strong color assumed to be the correct one to a little white. Mix a little of the combination only until assured that the right color is being used. When this has been determined, proceed with the mixing by taking the required amount of white and adding the body color until the right tint is secured. It is always better to mix a little more than seems necessary, for if there is any shortage much valuable time will be wasted in matching the second mixture with the first. Use a glass slab when mixing inks, for it can easily be kept clean. Work the colors together thoroughly with a palette-knife.

When a certain shade is desired, if it is to be made by the addition of black or some darker color, take a volume of the lighter color and add the darker to it. Make the addition gradually, and mix the ink thoroughly as just explained.

234. Duotone Inks. —Two-color effects are obtained in printing halftones by two distinct methods. In one, known as the duograph or duotype, two halftone plates are prepared, one for printing the halftone proper the other for printing an undertone. The other method is by the use of duotone ink.

Digitized by VjOOQiC

"Duotone" means two tones, and the efiFect of two tones is obtained by one printing.

K a halftone picture printed with duotone ink is examined it will be noticed that each dot in the halftone seems to be surrounded with a halo of a lighter color. This is due to the fact that the ink is composed of two colors that have not amalgamated, the lighter of which has spread out over the paper producing a stain, very much as a splash from a shaft-hanger would do if the thick, dirty oil dropped on a piece of paper. The most peculiar feature of the ink is that the job must be dried in the dark. If dried in the light, the undertone does not develop. Do not attempt to modify a duotone ink by the addition of dope, especially if any other part of the job has been printed with the same ink without doping.

235. Halftones. —Before the student can have a definite idea of the use of process inks it is essential that he should imderstand the method of making halftones and be familiar with the theory underlying process work.

In the production of the beautiful halftones that are now so much in evidence in modern printing, the photographic image is kept on the surface by breaking it up into dots. If these dots be examined it will be found that while they are uniformly spaced, they vary in size, ranging from almost imperceptible dots to sizes so large that they coalesce. This is accomplished by the use of a screen, •which is placed in the camera, in front of the negative, while the picture is being

taken. These screens are made by ruling pieces of glass with a series of parallel lines, then filling the lines with some opaque material. Two pieces are placed face to face, with the lines running at right angles, and cemented together. This produces a checkerboard with minute openings. The halftones in this book were made through a screen having one hundred and thirty-three lines to the inch. Newspaper halftones are usually sixty-five lines to the inch. Screens as fine as four hundred lines to the inch have been made. This means four hundred lines and four hundred spaces, yielding a space i /80c part of an inch wide.

Digitized by VjOOQiC

236. Three-color Process Work. —According to the Brewster theory of color, the primary colors are red, yellow, and blue. From these the secondary colors, orange, green, and purple, may be mixed; and by the mixture of a primary and a secondary a tertiary color is produced. From this it is evident that all colors may be obtained simply by the admixture of the primaries in different proportions. The production of the beautiful three-color process engravings is accomplished by the use of a halftone screen and by photographing the colored original through three different color-filters. Three separate plates are made. According to the amount of red, in the original picture, dots of the required size to give the right amount of red in the finished picture will be provided for in the red plate; wherever yellow is needed in the finished picture the right amount will be

provided for in the yellow plate; the same with the blue.

When the three plates are printed from, the effect is as if the object were printed in an infinite number of colors. If examined under a magnifying-glass it will be seen that the picture is built up of a mixture of red, yellow, and blue dots of varying size. It will also be noticed that the production of a hue is not due to the printing of one dot over another, but by printing them beside each other.

It is obvious that the juxtaposition of red and blue gives the effect of purple. If red predominates, the effect is a reddish purple; if blue predominates, it is a bluish purple. If the dots are small and much of the white of the paper is visible, the effect is that of a tint.

When making the negatives the lines of the screen are placed at a different angle for each plate, to avoid the production of a checkerboard or moire pattern in the picture.

237. Process Inks.—It has been found that inks that match the true spectrum colors do not give good results in three-color process work. By experiment, certain hues of the three fundamental colors—red, yellow, and blue—^have been found which produce excellent results. These inks are called process inks. When printing, the plates are run in the order, yellow, red, blue.

Digitized by VjOOQiC

Owing to the fact that the three fundamental colors cannot produce a black or a gray shadow, a fourth color is sometimes resorted to. This color is a grayish black. When printing a four-color process picture, the following is the proper order: yellow, red, black, blue. It is better to run the black before the blue, for if the black is run last and darkens the tones of the greens, there is no opportunity to rectify the trouble. If the blue is run last, the right hue may be used to produce the required tones of green.

When one ink is printed over another, if the first ink dries hard, it is frequently necessary to increase the tack of the one that is to be superposed; each subsequent one being tackier. Ink-makers provide special preparations that may be used to obviate this trouble.

QUESTIONS ON CHAPTER XV

1. Name three things that every letterpress printing-ink should contain.

2. What is a pigment ?

3. Of what use is varnish in a printing-ink ?

4. Of what substances are varnishes usually composed ?

5. What is a drier ? Why is it used ?

6. Is a drier absolutely necessary in a printing-ink ?

7. What is the difference between a liquid and a paste drier ? Tell under what conditions each should be used.

8. Why does soft ink dry quicker on some papers than on others ?

9. What kind of ink should be used on hard papers ? on soft papers ?

10. What effect have temperature and humidity on the working qualities of an ink ?

11. If the ink you were using pulled the face off of the paper, how would you rectify the trouble ?

12. If the ink was too thin, how would you stiffen it ?

13. What is the disadvantage of using varnish to soften an ink ?

14. What is the matter with an ink that gives a mottled impression ?

15. What do you understand by " tack" ?

16. Name some of the substances used by pressmen in doping ink.

17. Explain the proper method of mixing tints and shades.

18. What is a duotone ink ?

Digitized by VjOOQiC

19. Elxplain how and why a duotone ink develop>s two tones, and tell what special handling of the sheets is necessary for perfect results.

20. What is a halftone plate ? How is the printed image produced ?

21. What is the Brewster theory of color ?

22. What do you understand by three- and four-color process work ?

23. What colors of ink are used in the three-color process ? in the four-color process ?

24. Name the order in which the colors are printed in three-color process work; in four-color process work.

Digitized by VjOOQiC

CHAPTER XVI PAPER

238. Origin. —Paper, that indispensable substance for which modem civilization finds so many uses, had its origin in the papyrus plant, from which it derives its name. The early Egyptians split the stalk of the plant in two and peeled off the

pellicle in layers, then placed these so that they overlapped, and stuck them together with some adhesive, thus producing sheets or leaves.

The modem article consists of a prepared fiber mixed with a number of substances that act as binder, filler, coloring matter, etc. These substances are intimately mixed, and after passing through a number of processes are finally laid out on a moving wire screen which produces the paper as a continuous web.

239. The Fiber. —If a piece of paper be torn apart and a section of it held to the light, it will be seen to possess a feathery edge. This is the fiber. It is the most important part of the paper, and gives it strength. Long-fiber papers are stronger than short-fiber ones made from the same materials.

All fibers are of vegetable origin. While there are a great number of long and strong vegetable fibers throughout the world, the cost of preparation and importation makes their use prohibitive. Owing to the low rate at which paper must be sold, the cost of the raw material is an important factor. Of our native fibers, flax (linen) and cotton are most commonly used. Linen makes the very best paper, cotton ranking second. Other substances are as follows, in the order of their importance: wood, esparto (a grass), manila, and straw. Anything that yields a fiber is useful for paper-making. The residue of licorice-root, after the extraction of the licorice, is used. The linen and

cotton used in the better grades of paper are obtained from shirt and collar factories. Other grades are made from old rags. Rag stock is stronger than wood-pulp. Paper is frequently made by combining them.

The bulk of the paper used, however, is made from wood-pidp. Owing to the fact that timber is becoming scarce in the eastern section of the United States, wood is being made into pulp in the forests and shipped to various paper-making centers. Much of the pulp used in the United States comes from Norway, where, owing to the wooded mountains and the consequent cheapness of water, water-power, and timber, it can be pro-duced and imported into the United States in competition with the home product.

240. Pulp. —^The first step in the preparation of fiber for use in paper-making is to reduce the material to pulp. If pure white linen or cotton cuttings are used no special preparation is necessary other than to dust them and then cook them in an alkaline solution with steam, after which the fibers are thoroughly washed and bleached. If assorted rags are used, they are taken to a sorting department, sorted and graded, then cut into small pieces, dusted, and boiled in a strong solution of alkaline v/ater to loosen the coloring matter, after which they are washed thoroughly and bleached. They are then ready to go into the beater.

Before wood-pulp is put into the beater it is prepared by grinding the wood mechanically or by treating it chemically. The paper used in the average newspaper is made from mechan-ical wood-pulp. The mills that make the paper are located near the source of supply. The trees are cut down, carried to the mill, stripped of the bark, put on inclined tracks, carried against circular-saws, cut to lengths, dropped into hoppers, held against grindstones, and ground to short fiber. To prevent the heat generated by grinding from igniting the wood, a stream of water is played against the wood and grindstone. The water carries away the ground particles. They are passed over a sieve, which excludes all that are not sufficiently minute

Digitized by VjOOQiC

to be used in making paper. As mechanical wood-pulp contains various deleterious substances, it deteriorates rapidly and darkens on exposure to light.

Chemical wood-pulp is made by treating small particles of wood with chemicals to remove all extraneous substances and leave nothing but the fiber, which is really the cell-walls of the plant. There are two methods of making chemical wood-pulp—the soda process and the sulphite process. The former is the cheaper process, but the latter yields a stronger fiber. In both processes the wood is first chipped into small particles. In the soda process the chips of wood are put into a cylindrical tank, called a digester,'together with a specified

amoimt of caustic soda, and subjected to live steam at a pressure of about eighty pounds, for about eight hours, the cylinder being rotated diuing the boiling. The tank is then opened, the liquor drained off, and the pulp thoroughly washed. The first liquor is pumped into evaporators, where it becomes a syrup, after which it is burned and the soda reclaimed as soda-ash. After being mixed with lime the soda ash again becomes caustic soda, and can thus be used again and again. It is due to this reclamation of soda that the soda process is cheaper than the sulphite process, for with the latter all the chemicals are washed away and lost.

241. The Beater.^ —In order to thoroughly incorporate the ingredients, and also grind the fiber into minute particles, all of the materials of which paper is composed are put together into a device called a beater, (See Fig. 149.) The material passes between a steel or stone bedplate and a revolving roll on the periphery of which thick steel bars have been uniformly placed. The space between the roll and the bedplate can be accurately adjusted so that the fiber in passing between them is torn, dragged, or teasled out so as to produce a feathery end instead of being cut off. This causes the fibers to mat together in the web of the paper, and produce a stronger article.

242. The Refining-engine. —From the beater the pulp, now called stuffy goes to a machine called a Jordan, or refining-engine (Fig. 150), which in action and appearance is very much

Digitized by VjOOQiC

PAPER

205

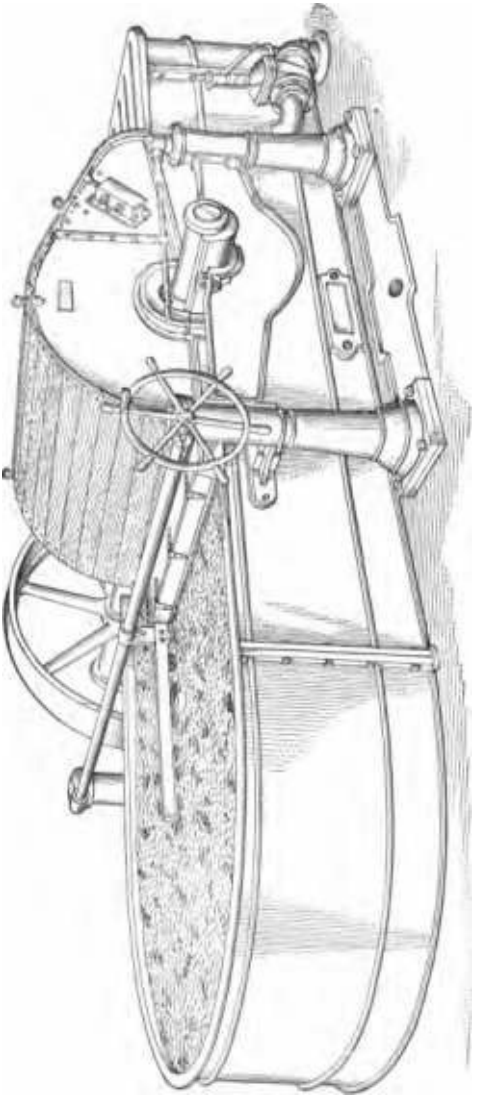

8

o

Digitized by VjOOQiC

like a coffee-mill, except that it is fiilly encased. Here the stuff receives its final grinding or refining, after which it passes on its way to the paper-making machine.

243. The Paper-making Machine. —Figs. 151 and 152 show respectively the wet end and the dry end of a paper-making machine. After the stuff leaves the Jordan it passes into a sand-trap, where it is mixed with a great quantity of water, and as it flows along all heavy particles, such as sand, iron, or other foreign substances, sink to the bottom and are caught by ripples. The stuff continues on its way, passing through a fine screen to the head- or regulating-box, thence out imder the gate on to the wire screen.

The gate is adjusted to allow a certain amount of stuff to pass through in a given time, and is very seldom changed. Different thicknesses of paper are obtained by regulating the speed of the machine. The faster the machine goes the thinner the paper produced; the slower the machine the thicker the paper. In fact, the machine is really laying out a predetermined weight of paper in a given time. The daily output of a machine, in tons, is fairly constant, provided the paper is not so thin as to be troublesome, in which event the speed of the machine and the set of the gate may have to be altered.

As the stuff emerges from under the gate it flows onto a

moving copper screen, of fine mesh, made like an endless belt. The screen is moving forward at a uniform rate, taking a uniform layer of stuff. A sidewise shaking motion is imparted to the end of the screen nearest the regulating-box which tends to set the fibers at various angles, causing them to mat together.

As the screen moves forward, the bulk of the water in the stuff passes through the screen by gravity. In its forward journey the stuff passes over suction-boxes, where the balance of the water is removed. The stuff is prevented from flowing off the sides of the screen by a belt of rubber, called a deckle^ which moves forward in unison with the screen. The shaking motion of the screen tends to force some of the stuff beneath the deckle, thus producing the deckle edge, so much desired in

Digitized by VjOOQiC

FIG. 150.—A Motor-driven Jordan, or Refining-engine.

Digitized by VjOOQiC

FIG. 151.—The Wet End of a Paper-making Machine.

Digitized by VjOOQIC

FIG. 152.—The Dry End of a Paper-making Machine.

Digitized by VjOOQiC

high-grade work. If the deckle is not desired, it is cut off with a jet of water, before the stuff leaves the screen.

If the paper is to be watermarked, either with a name, trade-mark, or with a series of parallel lines (thus producing laid paper), it is passed beneath a dandy-roU, which is a hollow cylinder of wire gauze, on which the design is worked out with thin wire, soldered fast to the outside surface of the cylinder. The weight of the cylinder presses the design into the still plastic mass of the paper, pushing aside the material. The reason the watermark is visible when held to the light is because the paper is thinner at those places.

After leaving the screen tlie paper is run between heavy brass rolls and rolls covered with thick blankets or felts. This serves to compress the paper, absorb the balance of the water, and, so far as possible, obliterate the mark of the wire screen.

From the felts the paper goes to the drying-rolls or dnuns. These are heated by steam, and by the time the paper emerges from the rolls it is thoroughly dry. It is then passed through a calender to impart a finish, after which it is cut to size if machine-finished, or rolled up if it is to have fiurther treatment.

The necessity for an abimdance of pure, dean water in the

making of paper will be realized when it is stated that in all the operations necessary from the time the wood fiber is put into the digester until it is laid out in a thin layer on the wire screen, a barrel of water has been used in the preparation of two poimds of paper. As the diluted stuff floats from imder the gate to the wire screen it is ninety-six per cent water.

244. Hand-made Paper. —If a sheet of machine-made paper is torn, it will be found that it tears more readily in one direction than at right angles to that direction. This is due to the fact that the forward movement of the screen under the gate has had a tendency to set the fibers in a longitudinal direction. This is known as the grain of the paper. All machine-made papers possess this grain. Hand-made papers, however, owing to the way in which they are made, do not possess a grain.

Digitized by VjOOQiC

When making paper by hand, the workman uses a wooden framework, or mold, covered with a copper screen. Another framework, known as the deckle, is fitted over the screened framework, and both of them are dipped into a tub containing the stuff. The mold is then drawn upward through the stuff, rapidly or slowly, as may be necessary, so as to leave an even and uniform deposit of stuff on the screen. As the mold is being withdrawn it is given a constant circular motion, which tends to swirl the fibers at all angles, and prevents grain. After the water has drained from the stuff, it is put

between sheets of felt, and then compressed in a screw-press, after which it is hung up in lofts to dry. Hand-made papers are very much stronger than machine-made papers.

245. Book Papers. —^There is an infinite variety of papers. The most important are machine-finishedy sized-and'Super-calendered, and coated or enamelled papers.

Machine-finished papers require no subsequent treatment after leaving the machine, but are usually cut to size after leaving the calender.

Sized-and-supercalendered papers, called engine-sized by paper-makers, are made by adding the sizing to the other ingredients in the beater. This sizing is usually saponified rosin, which is precipitated on the fiber by the use of alum. After the paper leaves the dr)dng-drums it is rolled up and then conveyed to a calendering-machine, where it is steamed to bring out the starch, after which it is passed between calenders, which burnish the surface and impart a gloss.

A calendering-machine (Fig. 153) consists of heavy rollers, some of polished chilled-iron, others made up of disks punched out of sheets of paper. These disks are put on a mandrel and subjected to many tons' pressure, thus making a cylinder of solid paper, with the edge of each sheet on the circumference of the roller. This cylinder is then turned down in a lathe to proper size, after which it is ground and polished. The iron and paper rolls are of different diameter,

and are placed alternately in the calendering-machine. When the machine is set

Digitized by VjOOQiC

in motion there is friction between the surface of the rollers and the moving web of paper, and a gloss is imparted.

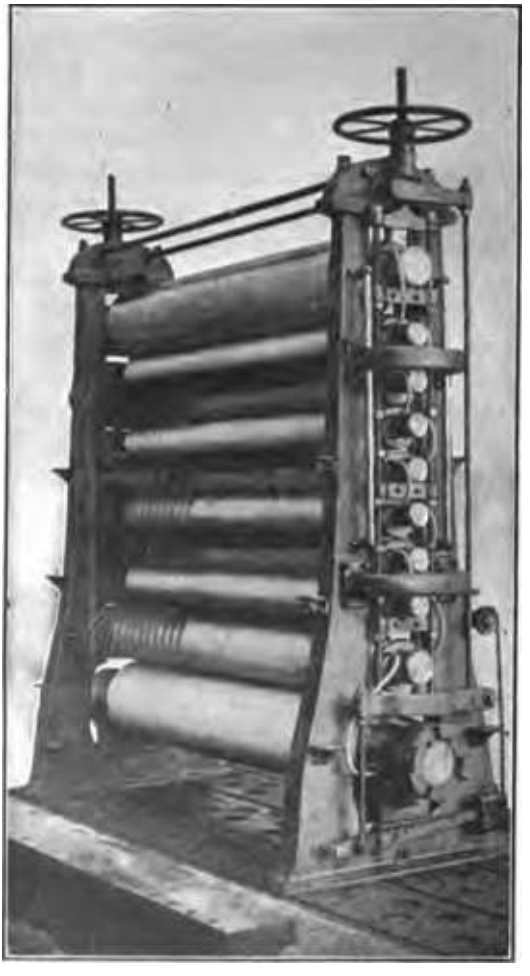

Fig. 153.—A Stack of Calenders.

Coated or enamelled papers are usually prepared by first making a web of paper, then passing the sheet through a trough containing the coating, after which it is passed between rollers to

Digitized by VjOOQiC

squeeze off the surplus and leave an even, smooth coating, or by putting on the coating by the aid of brushes, which leaves it in a smooth, even layer. After coating, the paper is passed through calenders to be polished.

246. Flat Papers. —^There was a time when nearly all large sizes of paper were folded before deUvery, the smaller sizes being delivered flat. These were called flats. The name still persists for the smaller sizes, even though all large book papers are now deUvered flat. Flats are the papers usually used for writing purposes, and embrace writings, bonds, and ledgers.

Owing to the high state of perfection attained in the manufactiure of paper, it is almost impossible to tell from a superficial view of a sheet of paper of just what it is composed. Some papers watermarked linen ledger have so little linen in them that the amount is negligible.

Ordinary writings, especially the cheaper grades, contain nothing but wood fiber, and are composed of ingredients that impart to it a finish that will take writing-ink.

Bond papers are composed of good, strong fiber, with plenty of sizing which gives them a hard finish.

Ledger papers are bond papers that have been tub-sized to

give them a coating that will fill up the pores and impart a smooth finish, specially adapted to writing-ink.

Papers that are to be used in blank-book making, especially matters of record, should be made from all-linen rags.

247. Sizes of Paper. —In the early days of paper-making, manufacturers restricted themselves to a moderate nimiber of sizes. Today, papers, especially book papers, may be obtained in many sizes and weights. Flat papers have not changed as much as book papers. The following list gives the names and sizes of flat papers:

Demy, i6"X2i"

FoUo, i7"X22"

Medium, i8"X23"

Royal, I9"X24"

Double Cap, i7"X28"

Digitized by VjOOQiC

Super Royal 20^X28"

Double Demy, Broad, 2i"X32" Double Demy, Long, i6"X42" Double FoUo, 22"X34"

Double Medium, 2^X2,6"

Double Royal, 24"X38"

Double Double Cap, 28"X34"

Some book papers may be obtained in the following sizes:

22"X32" 3or'X4i"

25^X38" 32" X44"

28"X42" 33" X46"

28"X44" 38" Xso"

248. The Ream.— The average schoolboy is being taught that there are twenty-four sheets to a quire, and twenty quires to a ream. This makes four hundred and eighty sheets to a ream. This is the legal ream. All papers (except a few imported ones and those that are so expensive that they are worth upward of two cents a sheet) are now made up into reams of five hundred sheets, or twenty-five sheets to a quire. As most jobs are ordered by the thousand, or a multiple thereof, this faciUtates the computation of the necessary stock.

249. Weights of Paper. —^A paper is known by the number of pounds it weighs to the ream of five hundred sheets. Book papers are based on a sheet 25X38 inches in size; flats, on a

basis of 17X22 inches; cardboard, on a basis of 22IX28J inches. If a paper-dealer were to test a sheet of paper by feeling it and say that it feels like basis eighty paper, he means that a ream of it, 25X38 inches in size, would weigh eighty pounds^ If the stock were a writing, a bond, or a ledger, and he said that it feels like an.No. 20 paper, he means that a ream of it, 17X22 inches in size, would weigh twenty pounds.

250. Designating Paper According to a Substance Number. —^Prior to the World War, paper was made so that it weighed a certain number of pounds to the ream. It was also made in an inmiense number of sizes and colors. Owing to

Digitized by VjOOQiC

the scarcity of raw materials during the war, the United States Government placed many restrictions on the paper industry. The United States Bureau of Standards advocated changes in the system of paper sizes and weights. As a result of numerous suggestions, paper-makers have adopted new standards for making paper.

Under the old system of sizes and weights, paper was made so that it weighed a certain even number of pounds to the ream. To do this it was necessary to vary the speed of the paper-making machine. As a result, the paper-maker was making an infinite number of thicknesses of paper. If a printer was using a paper that weighed twenty pounds to the

ream of 17X22 inches, and he wanted the same weight of paper in size 19X24 inches, he could not get it. The nearest he could get was 19X24—24 pounds. Exactly the same paper would have weighed 24.4 pounds. See Section 252.

Under the new system the paper-maker does not alter the speed of his machine. He makes a paper that will weigh a certain even number of pounds when cut to 17X22 inches. If it weighs sixteen pounds to a ream of 17X22, it is called substance No. 16. If it weighs twenty pounds, it is No. 20; and so on.

The same method prevails with book papers. The basic size is 25X38 inches. A paper that weighs 50 pounds to a ream 25X38 inches is called basis 50. If it runs 80 pounds to a ream, it is basis 80; and so on.

A basic weight produces a standard thickness for each particular paper. When a standard thickness is cut to other sizes, the paper does not always rim an even number of poimds to the ream. To avoid intricate calculation, weights are listed in the nearest half-poimd per ream. See Tables VI and VII, also Section 252.

A study of these tables shows that it is no longer necessary for a printer to figure relative weights. The weights are given in the tables. The number at the top of each colimin is the basis number. The numbers in each horizontal row opposite

Digitized by VjOOQiC

TABLE VI—SHOWING THE SIZES AND WEIGHTS PER REAM OF BONDS, LINENS, LEDGERS, AND OTHER FLAT PAPERS WHEN MADE ACCORDING TO SUBSTANCE NUMBERS.

Digitized by VjOOQIC

TABLE VII—SHOWING THE SIZES AND WEIGHTS PER REAM OF BOOK PAPERS WHEN MADE ACCORDING TO SUBSTANCE BASIS.

Size. 25 X38...

22 X32...

24 X36...

25 X38...

26 X29...

26 X40- •• 28 X42... 28 X44.-. 29X52... 3oiX4i...

32 X44 ..

33 X46...

34 X44..

35 X45-..

36 X48... 38 X50...

41 X61...

42 X56... 44 X56... 44 X64

100 74 91

100

79 no 124 130 158 132 148 160

157 166 182 200 264 248 260 296

the sizes are the weights per ream for that size and for the basis in that column.

The standard size for cardboard is still 225X28J inches.

251. Other Papers. While flats and book papers have undergone a change in weights but not in basic sizes, cover papers have undergone a change both in sizes and weights.

Organizations of printers, advertisers, and pubUcity experts have agreed to restrict the number of sizes and shapes of their advertising matter so that paper will not be wasted in cutting and so that the manufacturer may make fewer sizes and weights. To accomplish this, old sizes and weights of cover papers have been abolished, and cover stocks are now listed in the following sizes and weights:

20X26—50, 65, 80; 23X33—73, 95, 117-

In Section loi, page 98, a constant or multiplying factor is given for determining the dimensions of the hypotenuse oblong.

Digitized by VjOOQiC

This oblong has been endorsed by many influential national organizations, among them the National Association of Purchasing Agents, American Institute of Architects, American Society of Mechanical Engineers, United Typothetae of America, National Paper Trade Association, United States Department of Conunerce, Chamber of Conunerce of the United States of America. It is being advocated simultaneously in America, Europe, and Australia. The new cover size is, for all practical purposes, an hypotenuse oblong.

New cover size, 23X33 inches.

By calculation, 23"X 1.4142 = 32.527 inches.

^^' r7r7; = 23-334 inches. 1.4142

This means that cover papers in the new size, 23X33 inches,

will cut without waste to hypotenuse oblongs.

The term "hypotenuse" is given to this oblong because the

ratio of length to width is determined by an hypotenuse. Taking the width as one dimension, draw a right angle the other side of which has the same dimension. Draw an hypotenuse from corner to corner. This hypotenuse is the length of the side desired. See Fig. 154.

In every triangle where the base and altitude are of equal dimensions, the base is to the hypotenuse as i : V2. The square root of 2 is 1.4142. Therefore multiplying the width of any size desired by 1.4142 will give the length necessary to produce an hypotenuse oblong. Or, if the length is known, divide by 1.4142 to obtain the width desired. 252. Rule for Figuring Relative Weights. —Now that

paper is being listed under substance numbers, and the actual

weights of reams are given in tables, there is not the same



Fig. 154.—Showing how the Length is Determined from the Hypotenuse.

Digitized by VjOOQIC

need as formerly for printers to know how to figure relative weights of paper. Occasionally, however, when odd or special sizes are desired, it will be necessary to know how to figure the resultant weight when the substance is known.

The usual formula for determining relative weights of paper is the following:

Desired weight X basic number , . , . „

—■ :^—:—: =desu:ed weight.

Basic size °

Basic size in flats is 17X22; in book papers, 25X38.

Examples. —^How much will a ream of 19X24 weigh if the

basis is No. 20?

19X24X20 J

-^ —— = 24.4 poimds.

17X22 ^^^

This is listed in the table as 24.5 pounds.

How much will a ream of 32X44 weigh if the basis is 80?

This is listed in the table as 119 pounds.

253. Envelope Sizes. —^Nearly all paper-dealers are now making paper and envelopes to match, in sizes suitable for oflBce stationery. If special sizes are desired, they can be made to order. Table VII gives the numbers and sizes of envelopes ordinarily carried in stock in standard white papers.

TABLE Vni.— ENVELOPE SIZES

COMMERaAL No. Size. No. Size.

5 3A"X5r 10 4rX9i"

6i 3i"X6 " II 4rxior'

6i 3rX6i" 12 4rXii"

7 3rx6r 14 5 "xiii"

9 3rx8r

Baronial

No. Size. No. Size.

4 3rx4tt" s 4i"xsi"

Digitized byCjOOQlC

Drug and Pay Envelopes

Manila Paper No. Size. No. Size.

X irx2r 3 aA"X3r

2 2A"X3i" Pay 2rX4i"

254. Figuring and Cutting Stock.— When figuring on stock, be siure that you are planning for the right number that may be cut from a sheet, and always endeavor to use a sheet that will cut to size with as little waste as possible.

Many cover stocks will fold only with the grain and not across it, unless scored. If there is any choice in the matter, cut the stock so that it will fold with the grain.

The average letterhead is 8^X11 inches in size, and foiu:

may be cut out of a sheet 17X22 inches. If a short letterhead (8jX7i inches) is desired, it may be cut out of 17X 22-inch stock, six being obtained from a sheet.

Paper-dealers will not sell an odd niunber of sheets, and it is necessary to order stock in even quires. The usual allowance for spoilage on a job is two per cent for each time a sheet goes through the press. If the job is a three-color process one, three per cent for each time through the press is not too much.

If it is your duty to cut paper, proceed with extreme caution. Paper is frequently figured to get a certain niunber out of a sheet in one direction and a certain niunber in the direction at right angles to this. Many and many a time have such calculations been upset because the cutter took the first cut in the wrong direction !

QUESTIONS ON CHAPTER XVI

1. From what did paper derive its name ?

2. What is the substance that gives paper its strength ?

3. Name the different plants from which fiber is obtained ?

4. What is pulp ?

5. What is wood-pulp ?

6. Explain the difference between mechanical and chemical wood-pulp.

7. Of the two chemical wood-pulps, which is the better, soda or sulphite? Why?

Digitized by VjOOQiC

8. Which is the cheaper process, the soda or the sulphite ? Why ?

9. What is a digester ? Why is it used ?

10. Describe a beater, and tell what action it has on the fiSer.

11. What is a Jordan ?

12. How is paper of different thickness obtained on a paper-making machine?

13. Would it be possible to sell paper by the pound if the paper-making machine always ran at uniform speed ? Give reasons for your answer.

14. What per cent of the " stuff " is water, as it runs out on the wire screen?

15. What prevents the " stuff " from running off the screen at the sides ?

16. Why does the screen have a sidewise motion imparted to it ?

17. What produces the feathery edge on paper ?

18. What is the so-called watermark in paper ? How is it produced ?

19. Why is the plastic layer of paper run between heavy rolls and blankets or felts ?

20. Is there any difference in the appearance of the two sides of a sheet of machine-finished paper ? What is the difference, and what caused it ?

21. How is paper dried while in process of manufacture ?

22. What is a calender, and why is it used ?

23. Why is hand-made paper stronger than machine-made paper ?

24. What is a machine-finished paper? a sized-and-supercalendered paper ? a coated paper ?

25. What papers are usually known as " flats" ?

26. How many sheets in a legal ream ? How many in a ream of book paper ?

27. Give the basic sizes in the following: book papers, flats, cardboard.

28. What do you understand by a 20-pound paper? an 80-pound paper?

29. What do you understand by relative weights ?

30. Give the formula for finding relative weights.

31. How much would a ream of paper 22"X28" weigh, basis 80?

32. How much would a ream of paper 32"X44" weigh, basis 70?

33. What advantages are derived by making paper according to a substance number ?

34. What difference does it make if cover stock is cut with or across the grain ?

35. What is the usual allowance for spoilage ?

Digitized by VjOOQiC

Digitized by VjOOQiC

GLOSSARY

Abbreviation. —Part of a word used as a substitute for the whole word. Examples: Pa., for Pennsylvania; N. J., for New Jersey.

Accent. —A letter with a mark attached to show that the accent falls on that letter: €, acute; h, grave; 6, circumflex. Other marks, as e (dieresis), g (cedilla), fi (tilde), are diacritical marks, and are used to denote pronunciation.

Agate. —Name used for a size of type. On the point system agate became s§-point.

Alignment. —When different sizes of type are so justified that their faces all line at the bottom, they are said to be in alignment. See Point-line.

Alloy. —^A basic metal mixed with other metals to give it certain characteristics. See Type-metal.

Antimony. —A metallic element, used in type-metal to make it hard so that it will resist wear.

Antique. —A name given to a type face. The topic headings in this book are set in ten-point Old-style Antique.

Appendix. —That part of a book usually added as an afterthought, or to incorporate matter omitted from the text.

Apprentice. —One who is working under an agreement to serve an employer for a stipulated time, with the privilege of

learning a trade.

Ascender. —That part of a lower-case letter that extends above the body of the letter. The letters b, d, f, h, k, 1, and t have ascenders.

Balance.. —When a piece of type composition has its various parts so grouped that they are equalized in mass, it is said to possess balance.

Bar. —Book chases usually have bars across their centers to prevent them from spreading under pressure.

Bastard. —Anjrthing around a printing office not to standard form or size is said to be bastard.

iBeard. —See beard of type. Fig. 29.

Digitized by VjOOQiC

Bearers.—Roller-bearers are useful in job-press forms when the roller-pins are broken, for they then cause the rollers to rotate. Electrotype bearers arc pieces of metal, type-high, placed around type forms to protect them while making a mold in wax.

Belly.— When type forms are locked up and tested with a straightedge, it frequently happens that the lines bind at the ends and show a gradual depression in the center. This is called a belly.

Ben Day Process.—^A process invented by Ben Day, and used by photoengravers. The process consists in using gelatine films, with designs in relief, which are inked, and the designs transferred to metal plates. After being covered with a resin, which adheres to the ink and is burned on, the plate is etched.

Benzine. —^A liquid derived from coal-tar distillation. Used for cleaning type and presses.

Bevelled Rule. —^When the face of rule is at one side of the body, and the shoulder slopes to the other side, it is said to be bevelled.

Billhead.—^A form of ofl&ce stationery, usually sent with goods on delivery.

Black-letter.—^A black-faced type, usually called text. So named because when set in mass formation the whole tone of the page is black.

Blank-out.—^The blank part of the last page of a chapter. In the days of piecework, when type was mostly all set by hand, the compositor who got the last " take " in a chapter got paid for the blank-out.

Blocks.—Used for temporarily mounting electrotypes. The old form of electrotype block is rapidly giving way to solid and sectional blocks. The latter are composed of units, and

can be made up to any size desired.

Bodkin.—A long, tapering, sharp-pointed instrument useful for getting type out of a line while making corrections.

Bodoni.—Designer of the first modem roman type face. There is a type named in his honor.

Body. —See diagram of a type, Fig. 29.

Bold.—Anything that stands out prominently. Certain heavy faces of type are called bold.

Boldface.—A name given to type that is heavier than the text in which it is used. All topic headings in this book are in boldface type. See Proofreaders' Marks.

Book Chase.—A large chase, usually with shifting bars. Fig. 118.

Digitized by VjOOQiC

Border.—Anything enclosing a job, and intended to ornament it, is called a border.

Bottled.—When type is so badly worn that it no longer stands upright on its feet it is said to be " bottled."

Bourgeois.—A name given to a type under the old system, now supplanted by nine-point under the point system.

Braces.—Here are a few samples of braces. See also ** Cock and Hens."

Brayer.-A small hand-roller, used to keep up a uniform supply of ink on a job-press. Sometimes used for inking type when pulling proofs.

Break-line.—The last line of a paragraph.

Brevier.—That size of type now called 8-point under the point system.

Brilliant.—A size of type. Now called 3l-point under the point system.

Bronzing.—Covering a printed surface with bronze powder. The bane of the pressman's life.

Burr.—Any small projection left on metal after some mechanical operation. See Section 178.

Cabinet.—An enclosed wooden or steel frame containing type cases. Some of the newest are very elaborately equipped for holding leads, slugs, and other spacing material. See Fig. i.

Calculagraph.—A combination clock and time-stamp, so arranged that the elapsed time between two stampings is shown on the sheet.

Calendar.—A printed device showing the months of the year.

Calender.—A mechanical device, consisting of alternate rollers of chilled-iron and paper, and of different diameters, used for polishing the surface of sized and coated papers.

Cancelled Figures.—Figures with strokes through them, used in textbooks of mathematics, etc. jk 2 ^ 4 5. See under " Imposition," page 182, also Section 250.

Caps.—Capital letters are usually spoken of as caps.

Caption.—The explanatory matter printed beneath an illustration is called a caption.

Case.—A receptacle for type or other material, partitioned to keep the different items separate.

Digitized by VjOOQiC

Case. —^The cover of a book, after being printed, stamped; and made up to proper size to fit the book, is known as a case.

Case-rack.—^A frame used for the storage of type cases.

Cast. —^An exact duplicate of a type form, obtained either by electro-typing or stereotyping.

Casting-off. —Measuring type to ascertain how it will

divide into pages.

Catch-line. —A line consisting oi a few of the unessential words in a piece of advertising, but necessary to bind the main lines together.

Cat-step Circular.— Also called a " pull-out" circular. A circular printed on two sides of a long strip of paper, and which is folded over and over. Many time-tables are folded in this manner.

Cedilla. —^A mark under the letter g when it occurs before a, o, or u, to indicate that it has the sound of s, as in facade.

Celtic— The name of a type face. This is CELTIC.

Chapter Heading. —The main head at the beginning of each chapter.

Chase. —An iron or steel frame, in which forms are locked, so that they may be held firmly on the bed of the press. There are many kinds of chases—cylinder, job, spider, McGreal combination, electrot)rpe, etc.

Circumflex. —^An accent, 6, used to designate the long sound of the vowel.

Clarendon.— The name of a type face. This is CLASENDON.

Coated Paper. —When a highly enamelled paper is desired, a web of paper is first made and then coated and calendered. It comes in glossy and dull finish, and is a prerequisite for high-grade halftone work.

" Cock and Hens." —Individual characters that may be joined

together to make braces ' . . By the introduction of dashes

the braces can be made of various sizes.

Collotype. —A photo-planographic method of printing. The printing-plate consists of a gelatine film mounted on a heavy plate of glass. The film is made selective of moisture and ink, as in lithography.

Colophon. —Virtually, a trade-mark; formerly placed at the end of a book by the early printers, now usually placed on the title-page.

Color Work. —A term used to cover that part of printing in which the work is done in more than one color.

Complementary Color. —In the analysis of white light, it is found that there are certain combinations, of two hues each, which, when recombined.

Digitized by VjOOQiC

produce white light. Either of these hues is complementary to the other. In pigments, no two hues can be combined to produce white; the result is a gray. Green is complementary to red.

Composing-room. —^A room where type is set or composed and made up into forms for printing.

Composing-rule. —A compositor does not set one line of type directly on top of another, but uses a composing-rule on which to compose type. It may be of brass or steel, and is usually two points thick. See Figs. 10 and II.

Composing-stick. —^A metal device used by compositors to hold the tjrpe while it is being assembled into lines. It has an adjustable knee so that it can be set to different measures. The very latest ones are graduated in ems and half-ems of pica, and are capable of being quickly set to these measures. The composing-stick derived its name from the fact that the first ones were made of wood. See Fig. 8.

Composition. —That part of printing covering all the necessary operations incident to preparing forms for press.

Compositor. —One who composes type or performs any of the various operations incident to preparing forms for press.

Contents. —^A r6sum6 of the subject-matter of a book.

Copper. —A reddish metal, sometimes used as an alloy in

type-metal to improve its wearing qualities.

Copper Thin Spaces. —Pieces of copper, one-half point thick, cut to labor-saving lengths, usually from six points to forty-eight points.

Copy. —All material furnished to the printer and to be used by him in the production of printed matter is known as " copy." It may consist of manuscript, reprint, illustrations, photographs for reproduction, etc.

Copy-holder. —One who reads copy to a proofreader.

Comer Quads. —Pieces of type metal cast in the form of a right angle, and used around the comers of jobs, the intervening space being filled in with metal of the same thickness.

Cost System. —A modem efficiency method of ascertaining every item of expense connected with the production of a job of printing.

Creasing. —If cardboard or cover stock is so thick that it cannot be folded without breaking, it is necessary to crease it. This is usually done on a printing-press by locking up a piece of mle in the chase and exerting pressure against the tjmipan, the stock being fed to a guide. All heavy cover stocks that are to be folded against the grain must be creased.

Digitized by VjOOQiC

Cot-ln Note. —An explanatory note put right into the text to which it belongs, several lines of the text being set to a narrower measure so as to afford room for the note.

Cutter. —One who operates a cutting-machine.

Cutting-machine. —A mechanical device consisting of a bed, a clamp, and a knife, and used for cutting stock to the required size.

Cylinder-bands. —Strips of thin, flat steel, fastened in position near the cylinder and close to the bed of the press. They keep the rear edge of the sheets from falling on the bed of the press.

Cylinder Press. —A printing-press consisting of a cylinder, a flat bed, and an automatic inking device. The type form is locked on the flat bed, and the bed moves back and forth beneath the rotating cylinder, the sheet being held on the cylinder while the impression is being taken. If the cylinder makes but one revolution during a forward and backward motion of the bed, it is called a " drum " cylinder; if it makes two revolutions during a forward and backward motion of the bed, it is called a two-revolution cylinder. In the latter type of machine, while the bed is moving forward the cylinder is raised so that the bed may pass beneath it; when the bed is moving backward the cylinder is down, taking the

impression.

Dandy-roll. —A cylindrical roll used on a paper-making machine to produce the watermark and the laid effect which is visible when a sheet of paper is held to the light.

Dashes. —Plain or ornamental pieces of rule used to separate various parts of printed matter.

Dead-line. —A line marked on the bed of a cylinder press as a guide for placing the form. If the type extends beyond the dead-line it wiU strike the grippers on the cylinder.

Dead Matter. —Type that has been used and which is ready for distribution.

Deckle. —The feathery edge that is incident to the process of making paper. It is left on the printed sheet to give an artistic effect.

Delete. —To expunge; to remove. See " dele," under Proofreaders' Marks.

Descender. —That part of lower-case letters that descends below the body of the letter. The letters g, p, q, and y have descenders.

Diacritical Marks. —Marks used in dictionaries to show the proper pronunciation of the words.

Digitized by VjOOQiC

Dieresis.—^Two dots (") placed over the second of two adjacent vowels to show that they are to be pronounced separately, as in cooperation.

Distributer. —Any mechanical device that distributes type.

Distribution. —Placing type, rules, leads, furniture, and other material in their respective places.

Distributor. —One who distributes type.

Dope. —Nearly every pressman has some pet material which is supposed to be a panacea for all pressroom troubles. This is known as ** dope."

Double-leaded. —Placing two leads between lines in text matter.

Dovetailing. —When doubling-up leads, the arranging of them so that they overlap, or break joints.

Draw-sheet. —The top sheet of a tjrmpan, to which the guides and fenders are attached.

Drier. —A material added to ink to facilitate its drying.

Dr3ring-rack. —A skeleton frame with removable slides. The printed matter is spread out on the slides when printing,

and the slides are placed in the frame until the material is dry. See Fig. 143.

Dub. —An inexperienced printer. A mediocre workman.

Dummy. —Unprinted sheets made up into the form in which the finished job is to appear.

Duograph. —Two halftone plates made from one copy and usually printed in black and one tint, or two hues of the same color, the two plates being made with different screen angles.

Duotone. —An ink which, on drying, gives the job the appearance of having htea printed in two different colors.

Duot3rpe. —Two halftone plates made from one copy, both from the same negative and etched differently.

Egg-shell Finish.^A finish given to enamelled papers whereby the luster is destroyed*

Electrotype. — ^A printing-plate made by the deposition of a copper shell in a wax mold. This is backed with lead and trimmed to size and thickness. Before being printed from, it must be mounted type high.

"Em.—^The square of any body of type. The pica em is the unit of measurement in printing ofl&ces. See "en."

Embossing. —Pressing paper or cardboard between a pair of dies so as to leave the design in relief.

Digitized by VjOOQiC

En.—One-half of an em. Owing to the similarity in sound of em and en, the en quad is frequently spoken of as the " nut" quad, and the em as the " mutton " quad.

Enamelled.—Said of paper that has been coated and the surface calendered to a high polish.

Envelope Comer.—Advertising matter printed in the upper left-hand comer of an envelope, usually restricted to the name, business, and address of the sender. Useful in case of miscarriage of the letter.

Expanded.—^A name given to a type face whose width is slightly wider than a normal one.

Extended.—^A name given to a type face of extreme width.

Face.—^That part of a type that is inked and which leaves the impression on the printed surface.

Fat.—Said of matter that is full of illustrations, blank lines, or open spaces.

Feeder.—One who feeds a press. Also a name for any piece of mechanism that accomplishes the same thing—that of

putting sheets down to a guide or holding them in a definite position.

Feet.—^When a type is cast there is a jet adhering to the center of the bottom of the letter. This is broken off, leaving a rough section. A groove is ploughed through the center to remove this rough section, and this leaves the letter with two separate sections, on which it stands. These are called feet. See Fig. 29.

Felt Side of Paper.—All papers are made on fine wire screens, which leave what is known as a wire-mark on one side of the paper. With a view to eliminating this, the paper is squeezed between heavy blankets. This imparts a felt finish to the paper. The wire-mark is never entirely eliminated.

Fenders.—Pieces of cardboard glued to the tjmipan to prevent a sheet from slipping over the guides.

Fiber.—Part of the cellular structure of plants; used in paper-making to impart strength. The longer the fiber, the stronger the paper.

Flats.—It was formerly the custom with large sheets of paper to count them into quires and fold them in half. Small sizes of paj>er were not folded, but were delivered flat. In this way paper up to about 17X28 inches became known as flats.

Fly.—A mechanical device with long wooden strips, used on cylinder presses to receive the printed sheet from the cylinder and place it on a pile.

Digitized by VjOOQiC

Flyleaf.—The blank page at the front or back of bound books.

Folding-machine.—^A mechanical device so constructed that it will fold a sheet of paper, ready to be boimd into a book.

Folio.—Originally, a leaf in a book. From the lA'dn folium, a leaf. In the early days books were actually written on the leaves of plants; hence the name leaves. The figure used to designate a page number is also called a folio. Folio is the name given to a sheet of paper 17 x 22 inches in size.

Font.—A complete assortment of any one size and style of type is called a font. Typefoimders have a regular fonting scheme, each font containing a prescribed number of each letter or character.

Footnote.—An explanatory note put at the foot of a page, and usually referred to by some specific mark in the text.

Fonn.—^An assemblage of type, quoins, etc., locked up ready for press.

Form-truck.—A two-wheeled device, used for rolling heavy forms from place to place.

Foumier (Pierre Simon).—A native of France, and inventor of the point system.

Fractions.—Fractions are made in three different forms: solid, J^j piece, }; and adaptable, ^^Viooo.

Frame.—A composing-stand, of skeleton form, with slides for holding cases. See Fig. i.

Frisket.—^A sheet of heavy paper stretched across the grippers of a job press and cut out so that only the type can print on the sheet on the tympan. It is used when certain parts of the form mark and spoil the sheet.

Full-point.—^The mark of punctuation known as the period is frequently called a " full-pomt."

Furniture.—Pieces of metal or wood used in making up forms. It comes in widths which are multiples of picas, and in various lengths.

Galley.—Sometimes called a "pan." It may be of wood, but is usually of metal. It consists essentially of a smooth, flat bottom, with raised edges along three sides, the end being left open so that the composed matter may be pushed from the galley to the stone.

Galley-boy.—A boy whose duty it is to look after the galleys of type, pulling proofs, etc.

Galley-press.—^A device consisting essentially of a base and a heavy roller running on tracks, and used for proving galleys of type. See Fig. 19.

L^.gitized by VjOOQ iC

Galley-rack. —A sectional rack, with inclined slides, for holding galleys of type.

Gauge-pins. —Pieces of sheet metal, stamped into form, and used as guides on the tympan of a job press.

Gauge, Type. —A strip of wood or metal, graduated in type sizes. The gauge usually used by compositors is graduated in pica and half-pica sizes.

Gothic. —A name given to a type face, usually square in outline and devoid of serifs. The so-called text letter is really Gothic in form. This letter is in gothic— H.

Graphic Arts. —A name that embraces every form of printing that has for its object the production of text or illustration.

Grave (^)» — ^An accent, signifying that the letter is not to be strongly accented.

Great Primer. —A name given to a size of type that was in vogue prior to the adoption of the point system.

Gripper-edge.— That edge of a sheet of paper which is taken hold of by the grippers on a cylinder press. Sometimes called guide-edge.

Gripper-gauge. —A gauge used by pressmen and compositors to determine where to place the type matter in a chase or on press to avoid being struck by the grippers.

Grippers —^The small fingers on a cylinder press that hold the sheet firmly against the cylinder while the impression is being taken. On a job press the grippers are simply flat pieces of steel that press against the sheet and hold it firmly against the tympan.

Gudgeons. —Metal wheels that are slipped over the ends of the roller-stocks on job presses. The gudgeons roll on the tracks and, being keyed to the stocks, cause the rollers to rotate. They should be of the same diameter as the rollers. Adaptable and adjustable gudgeons arc made for this purpose.

Guides. —On job presses, either quads glued to the tjmipan or gauge-pins stuck into it; so placed that the printing comes into proper position on the sheet. On a cylinder press the bottom guides are fastened to a bar, and the side guides to the feedboard. Each guide is set by moving a screw which

has a milled head, a set-screw holding it firmly after it has been properly adjusted.

Hair-line. —^The very fine lines of any type face are known as hair-lines. The term "minor element" has been suggested as a more appropriate one.

Half-title. —^The name or title of a book, placed at the head of the first chapter, or printed in one line on a full page.

Halftone. —A photoengraved plate consisting of dots of varying sizes, but uniformly placed, and capable of rendering not only the high-lights and shadows of a picture, but all the half or intermediate tones.

Digitized by VjOOQiC

Hell-boz. —A box into which all maimer of bent, battered, or useless printing material is thrown. There should be separate boxes for type, leads, and brass rule.

Imposing-stone.—A framework surmounted by a 'smooth, level slab of marble or steel, on which forms are imposed.

Imposition.—^The placing of pages in a form so that they will print in proper position on the sheet.

Imprint.—The name and address of a firm. A name put on printed matter to show who did the printing.

Indention.—^When one line stands in farther than another it is said to be indented. Paragraphs are usually indented. If the first line begins flush, and the subsequent lines are held in a little, the indention is called a hanging indention.

Index.—^A compilation of the most essential things contained in a book, and arranged alphabetically for quick reference.

Initials.—^Large letters used at the beginning of the main sections of a book or other printed matter.

Ink.—A combination of pigment, varnish, drier, etc. Made in many foims, colors, and consistencies, to suit the varied requirements of the printer.

Ink-balls.—Formerly used for inking forms. They were made of leather stuffed with cotton. Since the advent of rollers they are no longer used. A picture of two ink-balls, face to face, is frequently used as a symbolic sign by printers.

Ink-knife.—A thin, flexible steel knife, used for mixing inks.

Inserts.—Pieces of printed matter produced separately from the main body of a book or magazine, and inserted in proper position before binding.

Intaglio.—^Any engraved surface where the design is cut in the metal, and which is filled with ink, the surface being cleaned, so that the ink in the design may be transferred to paper.

Ionic.—A name given to a type face. This is a specimen of Ionic type—H.

Italic.—^A sloping type face, named in honor of Italy.

Italic Quads.—Among the uninitated, the sending of an apprentice for italic quads is supposed to be a joke. The American Type Founders Company, however, did make a font of Gothic Italic in which every letter

Digitized by VjOOQiC

sloped, and which required italic quads. The italic matrices used on the Ludlow Typograph also slope in this manner.

Jeflf.—^To throw em quads in the same manner as dice. The one throwing the greatest number of quads with the nick up

winning the throw.

Jet. —A small projection on the bottom of each piece of type as it comes from the mold. The jet is broken off and the roughness removed with a plane, thus leaving the letter with two feet.

Job Press. —^Any printing-press used for printing jobs. Formerly restricted to platen presses. Since the introduction of curved electrotype plates, small job cylinder presses have appeared on the market.

Journeyman. —^A full-fledged workman. A few centuries ago this title was given to a workman who journeyed from place to place in order to acquire a full knowledge of his trade.

Justification. —Making a line fit a given measure. When using two sizes of material together, justifying is the placing of enough material with the smaller to make it equal the larger.

Kern. —^That part of the face of a letter which overhangs the body. The letters f and j are usually kerned. Because of the kern on the f it is necessary to have the ligatures fi, fif, fl, fl&, and ffl. Many italic letters are kerned.

Keyboard. —^An assemblage of keys, systematically arranged, each of which controls some mechanism so

arranged that a matrix may be assembled (as in the Linotype and Intertype) or a letter cast (as in the Monotype).

Key-plate. —Any plate that is used as a guide to get other plates into register. In the three-color process the blue plate is used; in the four-color process the black plate is used.

Labor-saving Material. —^Any material cut or cast to regular pica

lengths.

Laid Paper. —Any paper which, when held to the light, shows close, parallel lines, some of them frequently running at right angles. The laid effect is really a watermark, and is due to the pressure of the dandy-roll on the soft paper-pulp.

Layout. —Practically, a working diagram of a job. Usually marked to show the general grouping of a job, and also specifying the sizes and kinds of type to be used.

Layout Man. —Sometimes called a "typotect." Practically a typographical architect. One whose duty it is to prepare layouts.

Digitized by VjOOQiC

Lead. —One of the elements of the earth. The basic metal in an alloy used as type-metal. The proportion of lead in type-metal varies with the size of type to be cast.

Lead-cutter. —A device for cutting strips of lead to required size. See Fig. 120.

Leaded Matter. —Type matter with leads between the lines.

Leaders. —^Leaders are periods or dots cast to different multiples of the body size. They are used in tables to lead the eye from one point to another. Open leaders run one dot to the em, and are cast on one-, two-and three-em units. Close leaders are cast on en, em, and two- and three-em units, and are sometimes used as a substitute for dotted rule.

Leading. —Placing the required number of leads in a piece of composition.

Lead-rack. —^A partitioned receptacle for the accommodation of stock sizes of leads.

Leads. —Strips of metal, made to multiples of points, and used in spacing lines of type.

Leaf. —Each separate sheet of paper in a book. Some of the early books were made by scratching on leaves with a stylus; hence the word " leaf."

Letter-board. —A flat board, usually with strips of wood

around three edges, used as a place of storage for composed type.

Letterhead. —The printed form at the head of sheets of letter paper; also the sheet itself after it is printed.

Letterpress. —The adjective ; denoting printing that is done from raised surfaces.

Letter-press. —The noun; denoting an ofl5ce device for copying letters.

Letter-spacing. —Putting thin spaces between letters in a word in order to increase the length of the word, or to make uniform the apparent white space between the letters.

Ligature. —Two characters joined together on one body, as fi, ff, A, A, etc. Erroneously called logotypes.

Light-face.— A name sometimes given to a type face whose major and minor elements are very narrow, and therefore Ught in character.

Line-engraving. —A photoengraving whose various parts are represented in lines, and not broken up into half tones.

Digitized by VjOOQiC

Linotype. —A composing-machine. After the operator assembles a line of matrices, the machine automatically casts

a " line-o'-type," or slug, and then distributes the matrices into a magazine, ready for use.

Lithography. —A planographic method of printing. Originally, it «imply meant printing from stone, but at the present time it also covers printing from grained zinc or aluminum plates. The process is based on the antagonism of grease and water. The design on the stone is made receptive of greasy ink. The stone absorbs water and resists the ink. By successively moistening and inking the stone, impressions can be obtained on paper. Thin sheets of zinc or aluminum are used in tho " offset" process of printing.

Live MiAtter. —^Type matter that is not ready for distribution.

Lock-up. —^Locking up forms for press.

Logot]rpe. —A combination of letters joined together on one body. Ligature is the proper name, though most printers call them logotypes. See " Ligature."

Long Primer. —Name of a size of type in use before the adoption of the point system. Ten-point is the size nearest to what was long primer.

Lower Case. —^The lower of a pair of type cases ; the one in which the small letters are kept. Also, one of the small letters. When designating a lower-case letter on a proof the

contraction " I.e." is written.

Machine Finish. —Usually, a dull finish, left on paper as it comes from the paper-making machine.

Magazine. —^That part of a composing-machine in which the letters or matrices are stored, ready to be assembled into lines.

Majuscule. —A letter used as a capital letter during the period when books were written. See "Minuscule."

Make-ready. —The process of getting a job ready to print. It consists of pulling an impression, spotting up, setting guides, etc. The name is also given to the sheet containing the spot-up.

Make-ready Knife. —A knife specially shaped and ground, and used for cutting the pieces of paper used in spotting up a make-ready.

Make-up. —A compositor whose duty it is to make up composed type into pages.

Make-up Rule.— Sometimes called a "humpback" rule, because it has a hump in the back which can be readily grasped when it is desired to push the type along. It is used by newspaper men in making up pages.

Digitized by VjOOQiC

Mallet. —A wooden head mounted on a handle. Used in conjunction with an uncovered planer to plane forms or with a proof-planer to beat off proofs.

Margin. —^The amount of space around the printed matter on a page.

Marginal Note. —Explanatory matter placed in the margin of a page, usually beside the matter to which it refers.

Mass. —Spoken of in relation to groups or patches of type matter on a page.

Matrix. —^That part of a mold in which the face of type is cast.

Measure. —^The length to which a stick is set.

Melting-pot. —^That part of a casting-machine in which the metal is melted.

Minion. —^A name of a t3T)e size in use before the advent of the point system. Seven-point is the size nearest to what was minion.

Minuscule. —One of the small letters developed during the period when books were written.

Mitering-machlne. —A mechanical device for obtaining straight, smooth ends on leads, slugs, rule, etc., so arranged

that it will miter to any angle.

Modem. —A name given to a type face that is characterized by straight serifs and thin hair-lines. First cut by Bodoni in 1783.

Mold. —^That part of a casting-machine in which the body of the type is cast.

Monotone. —^All in one tone. A name given to a type face in which the various elements are all of equal width.

Monotype. —^Literally, one type or letter; specifically, a composing-machine that casts and composes individual type units into pages, ready for printing.

Mortice. —^The noun. Any cavity cut out so that something may be inserted in it.

Mortise. —^The verb. To make a cavity so that something may be inserted in it.

Nick. —^A depression left in one side of the body of a type during the process of casting. So that the letters will be in the proper order for printing, t3T)e is set in the stick with the nick up.

Nippers. —^The grippers on a cylinder press are sometimes called nippers. See "Grippers."

Nonpareil. —^Name of a size of type in use before the adoption of the point system. It was just half the size of pica. It is therefore six-point on the point system.

Digitized by VjOOQiC

Numerals. —^The Arabic numerals are i, 2, 3, 4, 5, etc.; the Roman numerals are I, II, III, IV, V, etc.

0£fcut.—Short sections of paper stock left over after the original stock has been cut down to the size required for a job.

Off Its Feet. —Said of type when it is not standing perfectly upright.

Offset. —^A smudge resulting from carrying so much ink on a sheet that some of it adheres to the bottom of the sheet above it.

Offset Printing. —A planographic process, wherein the ink from the form is first offset on a rubber blanket instead of being transferred directly to the sheet.

Old-style. —^A type face, characterized by oblique serifs.

Optical Center. —^That point on a printed page which the eye seems naturally to seek as the center. It is slightly above the actual center of the page; being, approximately, three-eighths of the distance from the top.

Ornament. —^Any rule, border, or conventional device used as an embellishment.

Outiook Envelope. —An envelope the front of which has been prepared with an oval cutout, or which has been made transparent, so that the name and address on the enclosure may be seen. This saves time and avoids error.

Overhang. —^Anything that projects beyond the main body of the type or slug.

Overlay. —When preparing a form of type or plates for printing it is necessary to put more impression on some parts than on others. A proof is pulled and the sheet spotted up. If this sheet is put on the tympan or cylinder, it is called an overlay; if it is put under or back of the form, it is called an underlay.

Overrunning. —Carrying over words from the end of one line to the beginning of the next. Frequently done to avoid a series of divisions or to obviate bad make-up.

Page. —One side of a leaf of a book.

Paging. —Making t3T)e matter into pages of uniform length.

Palette-knife. —^A thin, flat, flexible steel knife, used for mixing inks.

Panel. —An auxiliary part of a piece of type composition

that has been separated from the main body by being enclosed with a border.

Parchment. —^The dried skin of animals. Vegetable parchment is made by treating paper to a bath in heated sulphuric acid for a specified time.

Pearl. —A name for a type size. Under the point system, pearl became five-point.

Digitized by VjOOQiC

Perforating. —Punching small holes or slits in a piece of paper so that it will tear easily at some desired place.

Perforating-mle. —A piece of steel or brass rule, usually put into a type form, so that the job may be printed and perforated at the same time.

Photoengraving. —Any engraving process in which photography plays an important part.

Photogravure. —An intaglio printing process. By the aid of photography holes of different sizes and depths are etched in the outside surface of a copper cylinder. To break up the photographic image so that it will produce holes, it is necessary either to make the negative through a screen or lay a grain on the cylinder that will resist the action of the etching-fluid. This keeps the surface of the cylinder level. The cylinder rotates in a fountain of ink, the surplus being

scraped from the surface by a "doctor," leaving the ink only in the holes. The shadows of the pictures have deep holes which give up a lot of ink, while the high-lights have shallow holes and give but very little ink.

Photomechanical. —Said of a process in which photography is an aid or an auxiliary to some mechanical process.

Pi.—Type matter that has fallen apart and its various elements badly mixed.

Pica. —^The name of a type size. Under the point system pica became twelve-point. The name pica is still used. It is the unit of length for leads, slugs, rules, furniture, etc.

Picking (of Paper). —Printers frequently have trouble with enamelled or coated papers, due to the fact that the ink is so tacky that it pulls the coating from the face of the paper.

Picking " Sorts." —^When a compositor is setting a job and he finds that certain needed letters are missing from the case, he is sometimes compelled to go around the office picking "sorts" from other jobs in order to set his own.

Piece-fraction. —A fraction that has been made up of more than one piece. The most-used fractions, like yi^J^Mi etc., are made in one piece; but unusual fractions, like Tofe or "Veoo, are built up of pieces, called piece-fractions.

Piecohand. —A workman who is paid at a specified rate for the work that he does. He is not paid by the week. His earnings depend entirely on the volume of work that he produces.

Piece-7;ork. —In composition, piece-work is that which is paid for at so much per thousand ems.

Digitized by VjOOQiC

Pigment. —Any soKd substance that is added to printing-ink to give it body and color.

Planer. —A block of hard wood, one face of which is level and smooth. Used on the face of type forms to push down all the letters and make the form plane or level. The face of a proof-planer is covered with felt.

Planographic. —Any printing process where the ink is taken from a plane surface. All such processes are based on the antagonism of grease and water. (See Lithography.)

Plate. —Any metal surface so prepared that after being inked it is capable of yielding impressions.

Platen. —That part of a job printing-press on which the make-ready, tympan, and guides are placed, and on which the sheet takes the impression from the type.

Point. —The unit of the point system. It is one-twelfth of the

American pica, and measures .01384 inch thick. Type sizes are now based on this unit.

Point-line. —^When the face of type is placed in such position on the body that various sizes may be justified by using material that is some multiple of the point, it is said to be on point-line.

Point-set.^-Said of a font of type whose characters are all cast on body widths that are some multiple of the point.

Point System. —A system of casting type bodies on some multiple of a unit called a point. One point is .01384 inch.

Poster. —A printed sheet used for outdoor display advertising, usually pasted on billboards and fences. A one-sheet poster is a single sheet 28X42 inches in size; a two-sheet poster is made by using two sheets, one-half of the design being on each sheet. Very large p)osters are made up of a combination of single sheets, each containing a portion of the design.

Poster-stick. —A large, wooden composing-stick, used when setting tyi^e for posters.

Pressman. —One whose duty it is to prepare forms for printing. This he does by making ready the form, and by making proper adjustments of the various parts of the press.

Pressroom. —A room where printing is done. The ideal

pressroom is one that is so arranged that temperature and humidity may be controlled; perfect control being essential to uniform results.

Printing-press. —Any piece of mechanism from which a succession of reproductions may be obtained by first inking an original and then transferring the ink to paper or other material by the application of pressure.

Digitized by VjOOQiC

Process Work.—^Work obtained by printing from plates prepared by the photoengraving process. A halftone process whereby varicolored pictures may be obtained by the use of three- or four-color plates as originals.

Proof.—^Any printed impression of a job that has been made for the purpose of inspection and correction.

Proof-paper.—Any paper used for pulling proofs. Dry proof-paper is specially made for the purpose, one side of it being highly glazed.

Proof-planer.—^A block of wood, one face of which is perfectly plane and covered with a layer of felt.

Proof-press.—Any piece of mechanism made especially for pulling proofs.

Proofreader.—One whose duty it is to read proofs and mark

the errors.

Pull-out.—Anything pulled out from the form by the suction of the rollers.

Pull-out Folder.—^A printed circular whose pages have been folded over and over. The pages pull out when opening the folder. Also called "cat-step" folder.

Pulp.—^Wood or other vegetable fiber from which paper is made.

Punctuation.—The separation of words into clauses and sentences by the use of marks, each of which has a definite use.

Quads.—Blocks of type metal, cast to point sizes of body, and in multiples of the square of the body. A one-em quad is just as wide as it is thick; a two-em quad is twice as wide as it is thick; a three-em quad is three times as wide as it is thick. Em quads of various sizes are illustrated on page 6.

Quoin.—A mechanical device so constructed that it may be expanded, thereby exerting pressure. Used by printers to lock up forms. See Fig' 95-

Quoin-key.—A device for tightening quoins.

Quotation.—Matter written by one author and made use of by another^ the latter <riving full credit to the former.

Quotation Furniture.—Metal furniture that has been cast in type molds. The body of the furniture has a smooth top, but it is hollow beneath, the walls being sustained by cross-ribs. It is cast in lengths from four to twenty picas, varying by four picas.

Quotation Marks (" ")•—A set of marks used to enclose quotations, thus indicating that the words so enclosed were written by someone other than the author.

Digitized by VjOOQiC

Railroad Fttmiture.— Metal furniture whose two side walls are joined through the center with a sustaining web.

Railroading. —A term used to describe the marking-over of words at the ends of successive lines.

Reducer. —A substance put into printing-ink to reduce its consistency.

Register. —To get the various parts of different forms into such position that when they are all printed on a sheet each printing will be in its proper place.

Reglet. —^When wooden furniture is cut into strips thinner than two picas, it is called reglet. The most familiai* thicknesses are six and twelve points.

Reprint. —To print again. After a job has been printed once,

each subsequent printing is a reprint.

Reproductive Processes. —Any process of printing whereby a number of impressions may be taken from a prepared surface, the siuiace being inked each time before the impression is taken.

Revise. —To compare a marked proof with a proof of a corrected job. After the proof is revised it is known as the first revise. If the corrections are not all made, and a second proof is necessary, that one is known as the second revise; and so on.

Riding. —^When any part of a form works up on press, it is said to be riding.

Roller Composition. —A combination of glue, glycerine, molasses, etc., melted and cast in molds around a central core or roller-stock. Each manufacturer has his own secret formula. The amount of each ingredient varies with the season of the year, a softer roller being required for winter than for summer use.

Roman. —The word "roman" when used in connection with type faces means that the vertical elements are upright, and not inclined, as are the same elements in the italic form.

Routing.—Cutting away that part of any printing-block which is not needed, and which would likely mark the sheet.

Rules. —Strips of brass or lead, type high, one long edge of which has been prepared as a printing surface.

Runic.—A name of a type face.

Running Head.— Head-lines used at the top of each page throughout a pamphlet or book.

Digitized by VjOOQiC

Saddle-stitched. —^A pamphlet in which all the leaves inset each other, and which is stitched through from the center to the back, is said to be saddle-stitched.

Scoring. —Making a crease in heavy paper stock, so that it may be folded without breaking.

Script. —A type face in imitation of handwriting.

Serif. —A small projection at the ends of letters. See Fig. 29.

Setwise. —A term used to differentiate the width of a letter from its body size. Body size is bodywise; width is setwise.

Sheetwise. —^When a sheet has been printed on one side

from one form and then backed up with another form, it is said to have been printed sheet-wise.

Shooting-stick. —^A piece of iron or wood so shaped on one end that when placed against one edge of a wooden quoin and struck with a mallet the quoin will be driven against its mate and the form locked up. Mechanical quoins have almost supplanted wooden quoins for locking up forms.

Side-head. —A subhead placed at the top of the text, but at the side instead of the center.

Side-stick. —A long, tapering, wedge-shaped piece of wooden furniture, used alongside of type in forms and galleys, and locked in place with wooden quoins. ,

Signature. —Small Arabic numerals printed on the first page of each form of pages throughout a book, and numbered consecutively to show in what order the sections are to be assembled. Each section is also called a signature

Sinkage —Blank space placed at the beginning of a chapter in a book.

Size. —When a job is to be bronzed it is first printed with size, which is a sticky compound used like printers' ink, and to which the bronze powder adheres.

Sized and Supercalendered. —Paper is said to be sized and super-calendered when the sizing is put into the beater with

all the other ingredients used in making the paper, and afterward steamed and calendered.

Skeletonizing. —Taking a job apart and rebuilding it so that its various parts may be printed in different colors.

Slip-sheeting. —Placing pieces of heavy, rough paper between printed sheets so that the printing on one sheet will not offset on another.

Slitting. —Cutting slits in sheets by the aid of steel cutting-rule. Also cutting sheets apart as they emerge from the printing-press, by the use of cutting-wheels.

Digitized by VjOOQiC

Slugs. —Pieces of lead, about f-inch high, usually six or twelve points thick, used as spacing material between lines of type. The bar of metal with the type cast on it by the Linotype or Intertype is called a slug.

Small Caps. —Capital letters, usually made for book fonts, but of a smaller size than the regular capitals. They are generally made about the same height of face as a lower-case m.

Small Pica. —The name of a type size under the old system. On the point system small pica became eleven-point.

Solid Matter. —Type matter that has been set without using

leads between the lines.

Sorts. —^Type of various sizes and kinds held in reserve for replenishing cases.

Space-band. —A thin, compound wedge, made of steel, and used on the Linotype and Intertype for justifying the line of composed matrices.

Space-case. —A case specially arranged for the accommodation of quads and spaces of various sizes.

Spacing. —Putting the proper amount of material between words, lines, or groups.

Spotting-up. —Marking out and putting on patches on a make-ready sheet.

Stereot]rpe.—A plate cast in type metal from a plaster-of-Paris or papier-mach6 matrix.

Stet. —A term used in proofreading. When written on a proof, stet means, "do not remove the part marked out; let it stand."

Stick.—A composing-stick is usually referred to as a "stick."

Sticker. —Advertising matter printed on gummed paper.

Stone-hand. —A workman whose sole duties consist of

imposing and locking up forms.

Stonework. —Imposing and locking up forms.

Straightedge.—A long, flat, straight piece of steel, useful in lining up pages in a form.

Straight Matter. —Type composition that does not contain display lines.

Supercalendered. —See "Sized and supercalendered."

Swash Letters. —Letters that have ornamental prolongations or embellishments. (See page 82.)

Digitized by VjOOQiC

Tack.—Adhesiveness possessed by a printing-ink, due to the use of a •tiff varnish.

Tail-piece.—^An ornamental design used at the conclusion of a chapter or a piece of printing.

Take.—^When copy is cut up into sections and given to compositors to be put into type, each section of copy is known as a take.

Text.—^The straight body matter of a book is known as the text.

Text Letter.—Text letter is the name given to a type face whose general characteristics are bold, heavy, body strokes with sharp, thin, elongated serifs. Historically speaking, it should have been called Gothic. This word is set in Q[^Xt.

Tie-up Material.—A general term, embracing everything used in the tying-up of composed t3rpe—string, leads, slugs, comer braces, etc.

Tilde ('>^).—Placed over the letter n to show that it has the soimd of ny, as in cafion.

Tin.—^A metallic element, used in t3rpe-metal to make it tough and increase its resistance to wear.

Title.—^A name given to a type face possessing modem characteristics.

Title-page.—^Usually the first page of a book, and containing the title of the book, author's and publisher's names, etc.

Tumbled.—When a printed sheet is backed up by tuming it from top to bottom instead of from right to left, it is said to be tumbled. This should be avoided, if possible.

Turned Letter.—A letter put in upside down to call attention to the fact that another letter has been substituted for the right one. This is usually done when the right letter is not available.

Tympan.—^The sheets of paper drawn tightly across the platen and held in place by the tympan-bales. Sometimes called the packing.

Tympan-bales.—Bands of metal bent to conform to the shape of the top and bottom edges of the platen, and hinged to the sides of it. They arc used to clamp the tympan to the platen.

Type-caster.—A machine for casting t)rpe.

Type-gauge.—A strip of wood or metal, graduated in type sizes, and used for measuring the number of lines contained in a piece of matter.

Type-metal.—An alloy, ordinarily composed of five parts of lead, two parts of antimony, and one part of tin.

Digitized by VjOOQiC

Type-high.—In America, .918 inch high. It varies in other countries from .916 to .933 inch high.

Typography.—The art of printing from type. More particularly, type setting, or the proper assembling and grouping of type units in a piece of type composition.

Typotect.—A typographical architect. One who plans a job and designates just how it is to be put together.

Underlay.—A sp)ot-up sheet placed beneath a plate or typ)e page in an endeavor to make it level on the face.

Unit.—A standard quantity or number H / which other things are gauged.

The Monotype Unit is 1/18 of the set em of the body.

The Point b the imit of the point system. It is 1/12 of the American pica.

The unit for paper is the weight of one ream of paper one inch square, expressed in thousandths of a pound.

Varnish.—The vehicle or medium used in printing-ink to bind the pigment together.

Vellum.—Name given to a paper, the finish of which is similar to the finish on real vellum, which is a dressed animal skin from which the hair has been removed.

Vignette.—A halftone plate whose edges gradually fade away until they become lost on the white siuiace of the paper.

Wash-up.—The act of washing up a press.

Watermark.—A mark left in paper during its manufacture, and which is distinctly seen when the paper is held to the light.

Wax-engraving.—A method of obtaining printing-plates by first engraving on a wax-coated plate of copper, then building up the background and making an electrotype from the plate.

Woodcut.—A printing-plate of wood, on which an image has been left in relief by cutting away the background.

Wood-engraving.—^That branch of the art of preparing printing-plates in which the plate is of hard wood. It is really the precursor of all printing processes.

Wood Type.—Type characters cut out on the end grain of wood, usually cherry, and mostly of large size. Smaller sizes of type are usually of metal and cast in molds.

Digitized by VjOOQIC

Work and Tom. —Printing a full form on one side of a sheet and then turning it over and working the same form on the other side.

Wove Paper. —Paper that is free from the watermark lines which characterize a laid paper.

Wrong Font. —^Any letter in printed matter which is not of the same size or face as the balance of the word in which it is found.

Zinc-engraving. —A printing-plate made of zinc, the

background of which has been etched away, leaving the design in relief.

Digitized by VjOOQiC

Digitized by VjOOQiC

The niimben given are page numbers, not section numben. For additional list, see Glossary, pages 283-307

Abbreviated titles, 70 Abbreviation for poninds, 70 Abbreviations, 57

Ability required to set tables and other intricate matter, 141

to analyze and plan work, 84 Absorptive power oi paper, 353 Accidents on cylinder presses, 248 Accurate and uniform spacing, x6 Adapting ink to stock, 35^ AdMring to one type family, 87 Adjustable gudgeons, x68 Adjusting platen by aid of the impression-screws, 333 Adoption ol the point system, 5 Adverbs qualifying adjectives, 66 Advertising, 87

campaigns, 87 Aid to t^pe study, m as an. 8z Alabastine, use of^ for embossing, 243 Al^bra, genealogies, and pedigrees, x6z Aligning rule with type, 105 AUowance, for spoilage, 280

for squeeze, zx3,170

tat sgueeze in tables, z^6

of distance between fines when setting tables, X44

of white space around cuts, 156 Allowing for movement, in blank-book headings, 154 of Ttffstet jobs, x68 Altering an author's style of writing, 50 Always hold stick in hand while spacing

fines, 30 A.M. and P. M., 71 Ambiguity resulting from omission of comma,

American Lead- and Rule-cutter, 199 Amount of impression^ 336 of space around an initial, 99, zoo of space between words with sloping

letters, Z7 kA space between words with taU, straight

letters, 17 of water necessary to the production of a pound al paper, 370 Ampersand, 7z origin of, 7z use of, 71 Analysis of copy for letterhead, zx6 Ana^zing a job with a view to improving

It, X03

Ancient Roman stamps and coins, 74 Antiques. 79 Apostrophe, uses of 59

Appropriateness, 8s» 90

Approximation of material by measuring

it in inches, 7 Arrangement of type in cap case, z

in lower case, z Arranging and assembfing display type, 84 Arranpng the tympan, 338 Artistic temperament, opportunities for men

of. 84 Ascenders <A Cheltenham, 80 Assembling and arranging display t]rpe,

84 Assemblingdevice,Linotype, 3zo Auto-Mat Tabulator, 3zz Averaging the number of words in aline,

36

B

Back, z8z

Bad typography to mix old-style and

modem type, 79 Badly battered l^ter, patching a, 330 Balance, 85

Balancing of tvpe groups, 8$ Barber Low Slug Trimmer, 199 Bars, shifting, 183 Bastard lengths, alongside of initials, 113

of leads and slugs, 35 Bastard measure, cutting leads to, zz4 Battering rule with bodlun, 173 Bearers, 167

do not bear off form-rofiers, Z67

roller-, 334 Beater, the, 364 Bed of platen press, 33Z
Bending leads and slugs into circular form,

159 Benton, L. B., 80 Benzine for cleaning roOers, 346

for cleaning type, 346 Bewick Roman, jg Black ink on white piper. 90 Black4nk troubles, now to overcome, 3SS
Black4etter, 73 Blank-book headings, 153 Block letter, 7^

Bodkin, battering rule with, 173 Bodoni, designer of modem t^pe face, 77

quotation marks, 60 Bonds, 373

Book forms, inoob oi, 36 Book papers. 37Z Booklet cover, 137 Border units, how to make up, zx3 cleaning of, 32

309

Digitized by VjOOQiC

INDEX

Borders and ornaments, 98

Bowing a sheet, 234

Brackets, uses of, 6a

Brass rule, 104

Brayer. or hand-roller, 33

Break-line at top oi page, 30

Brewster theory of color, 259

Bulk of straight matter set on machines, 50

BuUen, Henry Lewis, 78

contribution to the study of type faces, 78

subdivision of type faces, 79 Burr on rule, 202, 303 Business card, 126 Butted rule, 107

Cabinets, dustproof, z Calculating typewritten copy, 36 Calculations lor Monotype matter, 37 Calender J 271 Calendenng-machine, 371 California Job Case, i CapiUl E's and T's, 79 Capital R's of various type faces, 8z Capitalization, 67 Cancelled figures, 182 Carbon tetrachloride, 247 Care of cutting-tools, 206, 207 Case, lay of, i Cases in pairs^ z

Casting-machme, Monotype 3Z3 Casting off. a table, 147

in columns, 143

type, gauge for, 30

type into pages, 30 Casting sorts on composing-machines, 3Z7,

2x8 Cause of loss of time when locking up jobs,

Chalk-mark as a guide for registering, 169 Chamfered or side-face rule, xo6 Chandler & Price Gordon Press, 22X Changing dimensions to points, 37 Characters used in Monotype rule work, Z47 Chase, X82, X94

McGreal combination, X94

top of, x8^ Chase-bars, loose. Z84 Cheltenham, 79

lacking old-style characteristics, 79 Chemical wood-pulp, 264 Circle, determining the exact distance around, 159, 160

bending leads and slugs to fit, Z59

placing a line around, 159, 160

setting type in, 158 Clam-shell type of platen press, 22z Cleaning border umts, 32

rules, 32

stone before pulling proof, 33

type. 32, ,

type with lye, 247 Clearface, 80 Cbsing envelopes, 240

while withdrawing from press, 241 Coated papers, 271 Collating, 193 Collating-marks, 193 Colon, and dash used together, 55

and quotation marks used together, 57

uses of, 56, 57 "Color ana Its Application to Printing," 257

Color-mixing, 357

"Color Notation," 2S7

Colored ink on colored pa^, 90

Colton, W. R., on proportions, 96

Columns, casting off in, 143

Comma, uses of, 5z-^4

Commas and periods inside ol quotatioD

mai^, 59 Comparison of old-style and modem serib,

of serifs, 8z

of type faces, 83 Complex sentences, 56 Composing-machines, 309

economy of, 309 Composing-room material cut to standard

len^[ths, 7

Composmg-rules, zs

m sets. 15

made from brass rule, zs Composinjs-sticks. Z3 Composition of printing-ink, 353 Composition rollers, 334

running down of, 33a Compositor, skill required, 84 Compound, adjectives, 65

nouns, 65

nouns of one or more syllables, 66

sentences, 56

word, omission of part of, 67

words set in capitals, 55

words without the hyphen, 66 Condensed type, use of, xoi Consideration of stock and ink when plan~

ning job, Qo Consistency of varnish, 353 Constant, or multiplying factor, 98 Contractions, 57, 59 Contrast, 85, 87, 90

Co];^)er or zinc instead of pressboard, 336 Copy prepared by proofreader before setting.

Cord, saving for future use, 30 Cork on ^ppers, 234 Cork to eject stock from cutouts, 345 Comers, gaping, how to fix, Z73

mitered, X07

troublesome, Z70 Corrected proof, 49 Correcting a job, 39 on stone, 39 Counter, embossing-, 343 Cover for an invitation, Z34 Covering power of ink, 355 Crowded matter, 90 Curved line, holding in position, x6i

use of gummed paper for holding in position, X59, xoo Cut, x8x Cutout for envelope, 338, 339

for tally-card, 160 Cuts, running type aroimd, Z55

type matter against, 156 Cutting and figuring stodc, 380

and slitting, 344

circle in old electrotype block, z6x

leads, slugs, rule, etc., in bulk, X97

leads to iMutard measure, 114

leads to odd measures, X99

Linot>rpe slugs, 198, 199

paper in more than one direction, 380

pattem for running type around cut. zsft

Digitized by VjOOQiC

3"

Cutting, printing, scoring, and perforating at one operation, 245 steel rule, 198 to multiples of a point on a mftering-

machine, 204 very small pieces of rule, 205 Cutting-rule, mounted in old electrotype block, 24s steel, 244 Cutting-tools, care of, 206, 207

for printers, 197 Cylinder presses, accidents on, 248

Dandy-roll, 270

Danger of type pulling out on press, 16

Dash and colon used together, 55

Dash as frequently used by advertising men,

55 Dash, uses of, 54-56 Dead-line, 183 Dead-oil, 247 Deckle, 266 edge, 266 Dele mark, 45

Deleterious effect of electrotypes on red ink, III of ink on rollers, 224 Delia Robbia, 79 Designating on order-blank which way tjrpe

is to be set, 116 Designating paper according to a substance

number. 374 Determining amount of space to fill line, 17 amount of leads to page, 41 exact distance around circle, 159, i6o how many lines of any size type may be

gotten into a given sp>ace, 38 how much matter a certain piece of copy

will make, 36 lay of a form, 178 margins, 177

margins for pages of equal size, 177 margins for pages of unequal size, 177 number of ems in composed matter, 38 number of inches of matter copy will

make, 37 value of composed type, 39 weight of tjrpe by measurement, 41 Devices, safety, 247 Diagonal method of proportions, 94 Diagrams showing inside and outside pages

coming together, 182 Die, embo^ing-, 242

Difference in modem and old-style faces, 76 Differentiating the comma from the apostrophe, 47 Digester, 264 Dirty type, 14 Discordant elements, 87 Dishing of rule, 190 Diskj talking-machine, use of, for emboss-

mg-counter, 243 Display type, 79

arrangement of, 84 Distributing display type, 34
Distributing-bar, Linotype, 211 Distribution, 33

Diversity of opinion regarding amount of impression, 226
division of words, 63

Diversity of opinion regarding ptmctoation, so use of hyphens in compound words,

6s

Dividing a word, 16

according to pronunciation, 6$

of compound words, 64

of verlxs in the past tense, 64

of words, 63-65 Dollar mark, when and how to use, 71
Dominating feature of a letter, 78 Do not sacrifice the appearance of spacing, 18 Dopes, 256

Double quotations, 59, 60 Doubling-up leads, 11

rule, 106 Dragging of proof-paper over form, 23 Draw-sheet, 223

V-shaped slit in, 233 Drawing lines from errors to correctioas on

proof, 47 Drier for printing-ink, 253 Driers, paste and liquid, 253 Dropping or throwing type into cases, 35 Dry proof as a guide for skeletonizing, izo Dry proof paper, 2^ Drying of printing-ink, 253

the sheets, 236 Drying-racks, use of, 237 Dummy, making a, to get lay of form, 179 Duotone inks, 257 Dustproof cabinets, i

£

£ach author has his own style of writing, 45 Early t3ri)es of composing-machines, 209 Ecclesiastical purposes, type for, 91 Economy of composing-machines, 209 Ed^e. deckle. 266 Editions de Luxe, 90 Eight, lay of the, 187, 188 Eight-pomt figures self-justifying to pica widths, 9

three-point spaces of, 150

type self-spacing to pica measures, 15c Electrotype clock, cut to shape for making cutouts, 24^ cutting circle m, 161 Electrotype plate, inserting cut in, 157 Electrotypea job, use of rme in, 107 Electrotypes, deleterious effect on red ink, III

to be nickel-plated, 111 Electrotyping job for two colors, no need to skeletonize, iii

when printing more than one at a time, 141 Elements, discordant, 87

of success in a job, 102

that give distinctive characteristics to type, 82 Em of the body, the, 6 Em, pica, 6 Embossing. 242

counter, 242

die, 242

explanation of term, 342 Emptying a stick, 18 En quad, 7

Enamelled paper for halftones, 354 inability to get register on, 354 Enamelled papers, 271

Digitized by VjOOQiC

Kwoing o< tetr-wheeb on printing-preises,

347 EiiTelobe cornen, 124,128,129

InrWing up, 165

Envelope, cutout for, 237. 239

cutout, placing in position, 239

sizes, 378 Envelopes, 337

closing, 2AO

closing wnile withdrawing from press, 341

opening and closing, 340 Equal space each side oi small words, z8 Exclamation marie, origin of, 6z

uses of, 6z Expansion of paper, 35^ Experiments to ascertain legibility, 80

Face-rule, how to use, 104 Fanning a pile oi paper, 33^ Fascination about typesetting, 84 Feeding a press, 234 Fenders, 32^, 234 Fiber used m paper, 262 Ficures, cancelled, X82

une-up of, X51 Figuring and cutting stock, 380 File, mitering with, 206 Filigree work on initial, loi First step in setting a ruled blank, 143 Fish glue, use of, for embossing, 243 Fitting letters, 103 Five-em space, 7 Flat papers, 273 Flying a sheet, 234, 235 Fold, 181 Fdding, by machine, 193

hand- and machine-, 177

heavy paper, 194

of sheet to obtain hypotenuse oblong, 97

proofs into book form, 26 Folios, $2, 181

encl(»ed in brackets, 62

to go into margins, 185 Forms, containing ndes, locking up, 165

imposing, 182

inserting, in press, 227

lay of. determining the, 178

locked up head down, 165

locked up head to the left, X65

locking up, 163

making a dummy to get lay of, 179

planing a, 166

ridmg of, X72, 17^, 18^

sprin^ess or "give" m, 167

squaring, 173

testing, 167

various parts of, 181

woric-and-tum, 176, x8i Form-planer, 33

Form-rollers not borne off by bearers, X67 Four, lay of, 187, x88 Four-em space, 7 Four-em wooden furniture, groove on, 173

not square, 173, 184 Foumier, inventor of point system, 4 French folio, 33

folio for spotting up, 228

chalk, use of, for embossing-die, 243 Frisket, use of, 241, 244

use oi, in printing a register job, 346

Full body of letter occupied fay initial, xoz Fundamental principles of job composition,

Furmture, metal, X84 fJadn^ in form, X84 reversing oi. to prevent riding oi f<»ms, 173

shrinking oi, 22$

wooden, 172, 184

Galley-press, 25

Gaping comers, how to fix, 173

Gauge for casting off type, 30

tympan-, 331 Gauge-pins, 231

Genealogies, algebra, and pedigrees, i6z General classification of tyite faces, 73

principles of locking up forms, 163

rules for layouts, i2a

survey of the field of job composition, 84 "Give" or springiness in a form, 167 Glass-encased pressroom, 254 Glass slab for mixing ink, 257 Glossary, 383-307

Gluing cardbocuxl to roller-track, 168 Glycerine as an aid in withdrawing sheets

from press, 236 Golden oblong, 97. 98

ratio oi Greek art, 94 Golding Jobber, 220 Gordon Press, 221 Gothic and text, use of together, 87 I Gothic type, 74

Goudy, type designer, 75

Grain of i»per, 244, 270.

Graphic representation of propOTtiona, 96

Gray tone, 87

Greek art, golden ratio of, 94

Gress on optical center, 85

Gripper-edge, 181

Gripper-gauge, 183

Grippers, 181, 223, 234

cork on, 224

skeleton, 223 Grit beneath type, 23 Groove on four-em wooden furniture, Z7S»

184 Grouping, 85, 91

of word "books" for letterhead, 130 Groupings for letterhead, 1x8,1x9 Gudgeons, 167. 224

aojustable. 168

and rollers not of same diameter, 168 Guide for registering, chalk-mark as a, 169 Guides, 223,331. . . ^ ^

holding m position on draw-sheet, 333

how to set, 331, 232

quad, 231 Gutenberg's invention, 4

Hair-lines, 76 Hair-space, 7 Halftone screen, 258 Halftones. 258

enamelled paper for, 254 Hand- and machine-folding, 177 Hand-cut overlay, 231 Hand-made paper, 270 Hand-roller, or brayer, 23

Digitized by VjOOQiC

313

Hand-set rule job, 14^

ruled blanks, 143

table. ^08 Hand-written books of the early scribes, 98 Hard ink, removal of, 247 Hard paddng, 226 Harmony, 85 ^ 87

Centiiiy Dictionaiy's definition of, 87 Hash, typographical, 80 Headings, near bottom of pages, 32

blank-book, 153 Heavy-faced type for iron and steel ads, 90 Heavy paper, folding, 194 Heavy tone, 87 Holding curved line in position, i6x

guides in position on draw-sheet. 232

proof-paper against roller on galley-press.

How dififerent thicknesses of paper are made, 266 much will it make? 36 printing-ink dries, 253, 254 ^pe should be held in the hand while distributing, 3^ How to acc^uire speed as a typesetter, ic ai^roximate the number of words in

copy, 36 distinguish the letters b, d, q, and p,

i> 4 fill a certain space with a certain piece

of copy, 38 handle a planer. 166 make a layout tor a letterhead, 120 make up border units, 113 obtain perfect joints in tables, 108 place proof-planer on form, 24 read^typne in the stick, 4 remedy ink troubles, 255 set lines straight across, X5z stand at case, 19

tell a roller in good condition, 224 use a galley, 19 Humidity, action on rollers and ink, 254

pressroom, 254 Hyphen, uses of, 58

with a double stroke, 47 Hsrpotenuse oblong, 97,98, 278 not changed by folding, 97

Imposing the form, 182 Imposing-stone, placing pages on, 176 Imposition, 176 Impression, amount of, 226

trial the, 228 Improper division of words to conserve equal spacing, 104 to obtain uniform spacing, 18 Improper way to lock up a form, 163 Improperly punctuated sentence, 51 Improving a job, 102

by the use of colored ink and paper, 102 Inability to get register on enamelled paper,

354 Incorrect method of feeding a press, 235 Indention of paragraphs, 7i> 7a

of poetry, 72 Initial A, as part of the word, 100

standing alone, 100 Initial, amount of space aroimd, 99

Initial and text in harmony, 99

in a different color, 99

lined up at the top, 100

occupying full body of letter, zoz

when word is all caps, 99

with filigree woric, xoz Initials, 99

bastard lengths alongside of, 1x3

mortised, 99

with plenW of white space on them, zoo

without white space on them, 100 Ink, deleterious effect of, on rollers, 224

hard, removal of, 247

soft, use of, 226

stiff, use of, 226

suited to the paper, 253

troubles, how to remedy, 255 Inserting cut in electrotype phte, Z57 Inserting form in press, 227 Inserts, 177 Insetting, 193

Inter-relation of spaces of different sizes, xsz Interrogation marlc, origin of, 60

uses of, 60, 61 Intertype, the, 218 Ionics, 79

Iron and steel ads, type for, 90 Iron quoins, 164 Irregularly shaped cut, justifying type to, 158

running matter around, 156 Italic type, 75

Jenson, Nicolas, 74 Job composition, 84

Job, not in harmony with shape of the page, 136 same shape as type, loi setting, 116 Jobs containing rules, 141

locking up, 170 Joints in tables^ how to obtain perfect, 108 Jordan, or refinmg-engine, 264 Judging proof by ^e impression in the I)aper, 23

Judicious ornamentation, 98 ustification by the use of point material, 112 Justifsong a line, 16 on the Monotjrpe, 214 one size of type with another, 9 type by the use of point-t^k spaces,

9 type to irregularly shaped cut, 158 Justifying-scale, Monotype, 2Z4

K

Kerned letters, 4

Kerosene, best material for washing lollera,

246 Keyboard, Linotype, 209

Monotype, 212 Key-form for registering, 241 Kind of twine for tying up tjrpe, 19 Knowledge required of a proofreader, 44

Label, 126 Labor-saving material, 7

Digitized by VjOOQiC

INDEX

Labor-saving rule not to be cot, Z07 Laid paper, 270 Lapped comer, Z07,108 Last line oi a paragn4>h, 17 Last page oi a chapter, 32 Latins, 79 Lay of case, i

form, determining the, 178 forms, 187 the eight, 187, x88 the four, 187, z88 the sixteen, 102 the twelve, x88,189 Lavout for an outlodc billhead, 12s

for a statement for outlodc envelope on unruled stock, 122

for a statement on ruled stock, 122 Layout man, 84 Layouts, general rules lor, 124 Law oi levers, 85, 91 Laws, unwritten, of typography, 90 Lead-cutter, 197-199 Lead rule, X04 ' Leaded matter, 10, 39 Leaders, 150

Leading matter while setting, 10 Leads, cutting of, to odd measures. 199

odd lengths of, 113 Ledgers, 273 Legal ream, 274 Legibility, 10

of old-style faces, 76 Length to width, relation of, 94. 95 Lengthwise forms, proper lay of, 194 Letter s showing oi)tical illusion, 85 Letterhead, analysis of copy for, zz6

description of, 116

groupmgs, X18, X19

how to make a layout for. x 20

la3ring ou t, to dry ,237

locking up, 165, x66

margins for, Z2x

position of, on sheet, I2Z Letters, mitering, 205

mortising, 205 Letter-spacbg, X02,103

to make lines of equal length, Z04 Levers, law of, 85 Ligatures, a

Light-faced tvpe for mUlinerv ads, 90 Line dravm through a capital letter in copy,

47 Line standing alone, 90

tight enough to stand alone, 16 Lines of nearly equal length, 103

too nearly uniform in size, 90 Line-up of figures, 151 Lining up an initial at the top, 100

initials containing filigree work, zox paragraphs on proof, 50 Linotype, method of mounting illustrations, 216, 217

method of running type around cuts, X55

rule, 104

slugs as spacing material, ix

the, 209 Linseed-od, 253 Liquid drier, 253 Littering of type

cases, 81 Locking a form so that it may be easily moved, 169

job and furniture together, 163

Locking two sections of a xule Job in one form, 170 up a form, 165

improper way, 163 proper way, 164 up envelope comers, 165 up forms, 163

containing rules, 165 general piindi^es, 163 head down, 165 head to the left, 165 so that pressman can read printed matter, 165 jobs containing rule. X70 letterheads, 165, 166 perforatine-rule, 170 register jobs, 168 Locking-quoms, 169 Logoty^, 4 Loose cnase-bars, 184 Lye for cleaning type, 247

Machine- and hand-folding, 177 Machine-finished papers, 271 Machine-fold, 193 Magazine, Linotype, 209 Mam item for display, 90 Major and minor elements, 82 Make-ready, 227

marking a sheet for, 229

patching a sheet of, 229

placing m position, 229

spoiling, 226 Making a dummy to get lay of pages, 179

columns equal full width of job, 144

columns to some multiple of the en, 149

pages a line long to avoid short pages, 32

ready, 227

up a stick, 13

to narrow measure, 148

up odd lengths of leads, xx3

up pages, 30

up to the paper, 187 MaUet, 23

Manuscript copy, zox Margins, 177

determining, 177

for letterhead, i2X

how to determine, when setting guides, 232 Marked proof, 48 Marking a sheet for making ready, 229

copy for boldface, 45 capitab, 45 italic, 45 small capitals, 45

of rollers, 225

pages on dummy, 179, x8o Marks, of punctuation, 5X

proofreaders', 45 Marrinff of sheets while feeding a press, 235 Mass grouping, 9x Masses, 91 Mass-weight, 8< Material, troublesome, X12 Matrices, Linotype, 210, 211 Matrix-case, Monotype, 214, 2x5 Matting of fiber in paper-making, 266 McGreal Combination Chase, X94 Meaning of the word "plane," x6<5 Measurmg tyi>e with a foot-rule« 39

Digitized by VjOOQ iC

3IS

Mechanical overlay, 231

wood-pulp, 263 ifediocre ability, 8^ Menu, treatment of, 132

Metal furniture,^ 184

Method of holding and tapping form-planer,

24 MiUer Saw-Trinmier, 197 Millinery ads, type for, 90 Minor and major elements, 82

elements, 76 Mitchell Mitering-machine, 200 Miter, explanation of term, 200 Mitered comers, 107 Mitering letters, 205 Mitering-machine, 200

cutting to multiples of a point on, 204

Mitchell, 200

resetting knife on, 202

set of knife on, 201

trimming material on, 202

trimming to gauge on, 203, 204

type fitting on, 205

upright, description of, 200, 201 Mitering with a nle, 206
Miters, inside and outside, with chamfered

rule, 106 Mixing ink, 256

tints and shades, 257 Modern and old-style faces, difference in, 76 Modem type, 77

for newspapers, dictionaries, etc., 77 Mold-disk, Linotype, 210 Monotype, method of mounting illustra-tions^ 216 • method of nmning type around cuts, 155

method of setting nue work, 147

rule, 104

rule job, 142

system a unit sjrstem, zo

the, 212

unit, 213 Mortised initials, 99 Mortised letters, 103 Mortising letter, 205 Mottling, 25 s Motto card, 133 Mounting embossing-die, 242

illustrations in machine-set composition,

215

Multio-Hexset Quadrats, Stephens's, 144 Multipl3ring factor, or constant, 98

N Narrow measure, setting t3rpe in, 149 Need for skill in setting tabular matter, 141 Nicknames, omission of period in, 58 No change in the cap case since the days of

Jenson, 74 Non-distribution, 216 Nonpareil, 4 Number of divisions permissible, 65

Oblique or sloping serifs, 79

Oblongs, 97

Odd length^ of leads, making up, 113

Office stationeiy, loi

Oil-cups, need for constant attention, 225

OUed sheet for registering, 241

Oil-holes, care of, 225 Oiling the press, 225 Old-face, 76 Old-style, 75

and modem not to be used together, 87

faces, legibility of, 76

for display work, 77 Omission of part of compound word, 67

of period uter Roman numerals, 70

of period in nicknames, ^8

of periods from headings and display lines, 70

of words in an extract, 58 One line longer than the rest, 16 Opening and closing envelopes, 240 Opening up of letters a and s to improve

legibihty, 80 Opportunities for men of artistic temperament, 84 Optical center, 85 Gress on, 85 Trezise on, 85 Optical illusion, 8$ Order-blank, 1x6

a typical, 117 Order of procedure in proofreading;, 50

of sequence in printing process inks, 260 Ordering stock in even quires, 280 Origin of exclamation mark, 6z

of interrogation mark, 60

of paper, 262

of the Roman alphabet, 74 Ornamentation, in harmony with balance of job, 99

of early hand-written books, 98

shape of, 99 Ornaments and borders, 98 Other groups of type faces, 79 Outlook envelope, planning for, 124 Oval serifs, 79 Overlay, hand-cut, 231

mechanical, 231 Overlaying, 230, 231 Overrunning type, 29

Pabst Oldstyle, 79 Packing, 223

hard, 226

soft, 226 Pages, in reverse of the printed sheet, 179

making up, 30

of equal size, determining margins for, * 177 ^ .

of unequal size, determining margins for, 177

on stone not in regular sequence, 176

out of center, 186

that back each other, 176 Panel grouping, 91 Trezise on, 91
Paper, 262

coated, 271

cutting in more than one direction, 280

different thicknesses of, how made, 266

enamelled, 271

expansion of, 254

flat^ 273

grain of, 244

hand-made, 270

ink suited ta 253

Digitized by VjOOQiC

Paper, laid, 270

machine-finished, 971

making up to the, 187

orisin of, 262

Ijiddng of, 254 , ^ .

sised-and-supercalenaerea, 971

sizes of, 273, 274

weights ot, 274

wire side of, 236 Paper-cutter, a dangerous machine, 249 Paper-making; machme, the, 266 Paragraph with side heading, 30 Paragraphs, indention of, 71, 72 Parentheses, use of, 63 Parts of a form, z8z Paste drier, 253 Patching a badlv battered letter, 230

a sheet of make-ready, 229 Pedigrees, algebra, and genealogies, 161 Penal sketches, 120 Per cent, 71

Percentages for oblongs, 97 Perfect jmnts in tables, how to obtain, 108 Perforating, 243

printing, scoring, and cutting at one operation, 245 Perforating-rule, 243

cutting rollers, 244

locking up jobs contuning, X70

lower than type-high, 244

preventing from cutting rollers, 170 Period of old-style faces, 75 Period, uses of, 57> 58

with Roman numerals and Arabic figures, 57 Periods and commas inside of quotation

marics, 59 Pi, 81

as an aid to tvpe study, 8x Pica, a standard size, 4

actual size of, 5

actual thickness of, 5

em, 6

size, lack of uniformity of, 5 Picking of paper, 254 Piece-workers, ^9

Pigments used m printing-ink. 252 Placing a job on the stone, 23

a line around a circle, 159, 160

envelope cutout in position, 239

furniture in form, 184

make-ready in position, 229

of proofreaders' marks on proof, 47

pages on the imposing-stone, 176 "Plane," meaning of the word, 166 Planer, form-, 23

how to handle, 166

proof-, 23 Planing a form, 166

form after it is locked up, z86 Planning a job, 91

things to be kept in mind when, loi

a ruled job, 145

for an outlook envelope, X24 Platen, adjusting by aid of impression-screws, 22^

defimtion of, 221

presses, 221

the. 222 Plugging quoins with a wad of paper, 170 » P. M. and A.M., 71 Poco proof-press, 27

Poetry, indention of, 72 Point, actual thidcness <rf, 5 Point

^stem, 4

invention <», by Foumier, 4 Pdnt-line, 9 Point-set, 10

Point-thick spaces, 9,1x3,150 Points, press-, 194 Poorly balanced page, 136, X38 Position oi letterhead on sheet, Z2Z Possessive case, 59, 70 Potter proof-press, 27 Pounds, abbreviation tor, 70 Press, feeding a, 234

oiling the, 225 Pressboard on tympan, 326 Presses, platen, 221 Press-pomts, 194 Press-proofs, 20 Pressroom, temperature and humidity, 254

up-to-date, glass-encased, 254 Presswork, 220 Preventing perforating-rule from cutting

the rollers, 170 Printed sheet, pages in reverse of, 179 Printers* oblong, p7, 98 Printing a job m two sections to obtain perfect joints, 109

a two-color register job by the aid of a frisket, 246

cutting, scoring, and perforating at one operation. 245

type above rule lines, X05, xo6 Printing-ink, 252

composition of, 252

dopes. 256

dner for, 253

duotone, 257

how it dries. 253

knowledge oi chemistry required, 253

mixing, 256

pigments used In, 252

process, 259

tack oi, 255

unwise to make additions to, 253

vehicle for canying pigment in, 353 Printing-office style, 69 Probable origin of the serif, 77 Problem in proportion, 91 Process inks. 259

order ol sequence in printing, 260 Process work, three-color, 259 Pntfessional removal notices, 131

statement, 130 Proof-paper, 23 Proof-planer, 23

Proofreader, knowledge required of, 44 Proofreader's duty, 51 to suggest change, 45

marks, 45

privilqee, 51 Proofreading, 44

requirements for, 44 Proofs m colors, 24

Proper and improper way of using rule with type, 105

lay of lengthwise forms, 194

spacing for leaded matter, zo

spacing for solid matter, 10

way to lock up a form, Z64 Properly punctuated sentence, 51 Proportion, 85, 9z, 94

Digitized by VjOOQiC

Proportion, diagonal method, 94

in relation to type faces, 76 Proportions, table of, 95 Proving boc^ forms, 26

pa^es in pairs, 26 Bibhdty type. 79. 90 Pulling a proot, 23

a revise, 30

proof of cylinder form, z86

proofs when jobs are too large for proof-press^ 26 Punctuation, 50

marics, 51 Putting away leads and furniture, 35 Pyramid ornament, 99

style of placing furniture in forms, 163

I'guides, S3X ■ .7

uery, 51

aire, number ol sheets to, 274 .udns, 164

iron, 164

locking-, 169

tightening, 167

wooden, 164 Quotation marks and colon used together, 57

and semicolon used together, 56

uses of, 59, 60 Quotations, double, 59, 60

single, 59, 60

R

Rag stock for paper-making, 263 Ratio, 91

of three to five, ox Reading type tine for errors, 16 Ream, number of sheets to, 274

the, 274 Reclamation of soda-ash, 264 Red ink, deleterious effect of electrotypes

on.izz Refining-engine, the. 264 Roister on enamelled paper, inability to

get, 25^ Ropster jobs, allowance for moving when setting, ZZ2

allowing for movement of, 168

locking up, z68 Registering, 2^11

used of oiled sheet, 242

use of pin in, 242 Reglet, use of, 185 Regular oblong, 97, q8 Rdation between characters of same font on Monotjrpe, 2x5

of margins for pages out of center, 187

of type sizes, 90

of width to length, 94, 95 Relative strength of hand-made and

machine-made papers, 27X Relative weights of paper, 278

how to determine, 279 Removal notices, professional. 131 Removing hard ink from rollers and press,

247 Removing rdlerswhen press is left standing, 225 Requirements for proofreading, 44

Reset spedmeos In "The Inland Printer,"

Z2A

Resetting of a poorly balanced page, 137,139

knife on mitenng-machine, 202 Reversing furniture to prevent riding of

form, 173 Revise, pulhng a, ^o Ribs on linotype slugs, zz Riding of forms, 172, 173, Z84 Ring drawn around a contraction, abbreviation, or an ampersand, 47 Rio Grande, 70 Rollers, 224

and gudgeons, not of same diameter, z68

composition of, 224

cut byj;)erforating-rule, 244

deleterious effect of ink on, 224

for different seasons, 224

in good conditions, how to tell, 224 x

marking of, 22s

shrinking of, 224

sliding contact of, 168 Roller-bearers, 224 RoUer-pins, wearing of, z68 Roller-stock keyed to gudgeons, Z67 Roller-track, gluing cardboard to, z68 Roman type. 74 Rosin-oil, 053 Round serifs, 79

Rounding of type from soft packing, 227 Rouse or American Slug-cutter, 199 Rubbing rules on the stone, 32 Rule, X04

burr on, 202, 203

dishing of, Z99

doublmg-up, X06

in a job part of the ornamentation, Z04

job bv four different methods, Z42

isi

^ »b, slurring of, 2^2

job, two sections locked in one form, 170

Linotype, X04

Mono^rpe, X04 Ruled blank, first step in setting, 143

blanks, hand-set, Z43

job, planning a, 145

job, setting a, Z4S> X46 Rules aligned with type, Z05

and type to align at bottom, X05

butted, X07

for spacing, Z7 Running down of composition rollers, 224

matter around irregularly shaped cuts, 156

type around cuts, X55

type around cut, cutting pattern for, Z56

S as an illustration of optical illusion, 85

Saddle-stitched, 176

Safety device for job press, Sylvester, 248

devices, 247

first, 225 Salient features of a job, selecting the, zox Sandpaper as an aid in withdrawing sheets

from press, 236 Sans-serif, 73

Saving cord for future use, 30 Saviour with a u, 70 Saw-Trimmer, MiUer, X97 Scoring; explanation of term, 244

printing, cutting, and perforating at one operation, 245

Digitized by VjOOQiC

Screen, halftone, 358 Script type, 75

Secret of obtaining good proofs, 24 Selecting the salient features of a job, xoi Selection of rule for a job, 104 Selfjspacing table, specimen ca, 148 Selling composition on a square-inch basis, 39 Semicdon and quotation mai^ used together, 56 Semicdon, uses of, 56 Sentence improperly punctuated, 51

properly punctuated, 51 Separating letters whUe distributing type, 33 Serif, 77

probable ori^ of, 77

the dominatmg feature of a letter, 78 Serifs, old-style and modem compared, 78 Serviceability of brass rule, 104

of lead rule, 104 "Set" of knife on mitering-machine, 201 Setting a blank-book heading, use of ruled sheet in, 154

a job, 116

a job in two sections to obtain perfect joints, 109

a raster job, 1x2

a ruled job, 145, 146

and roistering type to horizontal lines, X54

more than one column in a single measure, 152

rule work. Monotype method, 147

tables and other intricate matter, 141

tables to even multiples, 146

type m circles, 158

type in narrow measure, 149 Shades, mixing, 257 Shape harmony, loi

job lacking in, x^6 Shape of ornamentation, 99 Shaving letters, 103 Sheet, bowing a, 234

flying a, 234, 235 Sheetwise, 176, 181 Shifting bars, 183

Short "and", 71 Shrinking of furniture, 225

of rollers, 224 Side-face or chamfered rule, 106 Sierra Nevada, 70 Signatures, 193

Simplicity of modem composition, 99 Single measure, setting more tnan one

column in, 152 Single quotations, 59, 60 Sixteen, lay of the, 192 Size type to be used, 121 Sized-and-supercalendered papers, 271 Sizes of envelopes, 379

of papers, 273, 274

of spaces, 7 Skeleton grippers, 223 Skeletonizing, 109-in

for two colors, no

no need to, when job is to be electrotyped, III Sliding contact of rollers, 168 Sliding type of platen press, 221 Slipping of paper over face of type on galley-press, 25 Slipsneeting, 237 Slitting, 344

Sloping or oblique seri&, 79

Slug, Linotype, 209

Slug-cutter, Kouse or American, 199

Slugs^ tie-up, 186

Slurring, 342

of rule jobs, 342 Soaking type in lye-water, 32 Soda process, 264

Sodium silicate, use of, for embossing, 343 Soft ink, use of, 226 Soft packing, 226 Solid matter, 10, 39 Soluble water-gla^, 243 Sortj8i

Sorting leads and slugs, 3s Source of dirty quad-boxes, 18 Space, white, use of, 90 Space-bands, Linotyi>e, 210 Spaces alongside of type, 18 of different sizes, inter-relation (rf, 151 pNoint-thick, X13, 150 sizes of, 7 thickness of, 8 Spacing before colon, semicolon, interroga-tion mark, and exclamation mark, 18 condensed tjrpe, 103 extended tjrpe, xo3 job t3rpe, 103 letters, 102,103 of lines, 10

of words when lines stand alone, 103 words in capitals, X02 words with sloping letters, 103 words with straight letters, 103 Specimen of Bodoni Modem, 79 Caslon Old-style, 79 Cheltenham, 80 Clearface, 80 Fomm Title, 76 gothic type, 74

harmony and appropriateness, 88 Kennerfey, 76 old-style italic type, 75 old-style ty^, 74 . panel grouping, ^3 poorly balanced job, 86 poorly balanced page, 93 Scotch-face Roman, 77 script type, 75 self-spacmg table, 148 text type, 73 well-balanced job, 86 well-balanced page, 92 Specimen showing use of three-point bevel

rule, 93 Specimens of Bodoni tyite, 75, 77 brass rule^ 105 inharmomous groupings, 89 statement headings, 123 swash letters, 82 Specimens, reset, in "The Inland Printer,"

124 Spelling out of numbers, 71 Spoilage, allowance for, 380 Spoiling job by printing on wrong side of paper, 236 make-ready, 226

proof by improper use of proof-planer, 24 Spotting up, 227

use of French folio, 328 Spot-up, 227 Springmess or "give," 112,167

Digitized by VjOOQ iC

Square effect, Z03

ornament, 99 Squaring the form, 172 Squeeze, allowance for, 112, 146,170 Standardizing proi)ortions. 96, 97 Statement, professional, 130 Stationer]^, office, loz Steel cutting-rule, 344

rule, how to cut. 198 Stephens's Multio-Hexset Quadrats, 144 Stet mark, 47 Stiff ink, use of. 226 Stock, adapting ink to, 254 Straight matter, 38 Strawboard for cleaning rules, 32 Stuff, 264

Style of the office. 44, 69 Substance number for paper. 274

Success, elements of, in a job. 102 Succession of the same word on more than

two lines, 70 Sulphite process, 264 Swash letters, 82

Sylvester safety device for job press, 248 Symbols empbycd in proofreading, 46 System, typotabular, 141

Table, casting of a, 147

hand-set, 108

of proportions, 95

of rates per square inch for computing value of composed type, 40

of symbols employed in proofreading, 46

showing thickness of spaces, 8

showing weights of book papers, 277

showing weights oi flat paoers, 276 Tabular matter, need for skul in setting, 141

work. Linotype, 2zz Tack of ink, 255

Talking-machine disk, use of, for embossing-counter, 243 Tally-card, cutout for, 160 Temperature, pressroom, 254

Testmg a form, X67 Text and ^othic, use of, together, 87

and initial in harmony, 99

from ecclesiastical sources, 73

letter as the main feature of job, 87

type, 73 , . . ,

tme for ecclesiastical purposes, 9x Thickness of spaces, 8 Thick-space. 7

Thin space before colon, semicolon, interrogation marie, and exclamation mark, 18 Tilings to be kept in mind when planning

a job, zoz Three-color process work, 259 Three-em space, 7

Three-point rule a multiple of pica, xo6 Three-point space of eight-point, 9, 150 Throwing or dropping type into case, 35 Tie-up slugs, 186 Tightening quoins, 167 Tilting proof-planer, 24 Tints, mixing, 257 Titles, abbreviated, 70 To detect inequality of indention on proof, 50

determine charging rate per square inch^ 40

find cost of one square inch of any size type, 40

Tone, 8s, 87

gray, 87

heavy, 87

uniformity of, throughout job, 87 Top of chase, 183
Treatment of a menu, 132 Trezise on optical center, 85

on panel grouping, 91 Trial impression, the, 228 Trim, 181
Trimming material on mitering-machine, 202

to gauge on mitering-machine, 203, 204 Troubles with black ink, how to overcome.

Troublesome comers, 170

material, 1x2 True art not based on mathematics, 94
Tumbling, 193

Turning one type face into another, 78 Twelve, lay of the. 188, 189 Twisting plates into register, 168 Two-color job with type all in one form, 246 Two colors, skeletonizing for, xxo Two-letter division, 63 Two-on, X94^ Tying up a job, x9, 21 Tympan, 223

arranging the, 228

hard, 226

soft, 226

the, 226 Tympan-bale, which one to open, 230 Tympan-gauge, 231 Type adapted to paper, 75

and rules to align at bottom, xos

calculations, 36

distribution of, 33

faces, 73

faces, general classification, 73

families, 80

family, adhering to one, S7

fitting on a mitering-machine, 205

for ecclesiastical purposes, 9x

for narrow measures, xoi

for wide measures, xox

groups, balancing of, 85

matter against cuts, 156

of maximum legibility, 80

off its feet, 2X

punching through paper when pulling proof, 23

rounding of, from soft packing, 227

same shape as job, xoi

size to be used, X2i

sizes, new and old systems compared, 5, 6

sizes, relation of, 90

study, pi as an aid to, 8x

.systems, 6

to be set nick up, 15 Type-casting machines, 218 IVpe-high, X67

machines, 206 Typical order-blank, xx7 Typographical hash, 80 T3rix>graphy, bad, to mix old-style and

modern type, 79 Typotabukir method of securing definite

number of points between lines, X43 Typotabular rule job, X42 Typotabular squares, X4X TSix>tabular system, X4X Typotect. 84

Digitized by VjOOQiC

INDEX

U Underlay, 228

Underlining of words in copy, 45 Uniform spacing, 17
Uniformity of tone throughout job, 87 Unit, casting type to, 4

Monotype. 2x3 Units, border, how to make up, 113
Unwritten laws of typography, 90 Upright mitering-machine, description of, 200

201 Use of comma before conjunction, 53. S4

comma in amounts of five figures, 71 four figures, 71

condensed type. loi

figures for numbers, 71

fnsket, 241, 244

gummed inper for holding curved line in position, 159, 160

leads to make type fit space, 38

period with Roman numerab and Arabic figures, 57

pin in registering, 242

reglet, 185

rule in electrotyped job, 107

ruled sheet in setting a blank-book beading, 154

thin paper when making up a stick, 14

two-em furniture when tying up a bulky job, 21

white space, 90 Uses of the apostrophe, 59

brackets, 62

caret, 47

colon, s6, 57

comma, 51-54

dash, 54-56

exclamation mark, 61

hyphen, 58

interrogation mark, 60, fir

parentheses, 62

period, 57, 58

quotation marks, 59, 60

semicolon, 56 Using rule with type, proper and improper

ways, 105.

V, the old form of the capital U, 74 Vandercook proof-press, 28 Various parts of a form, 181

Varnish, 253 1

Varnishes of different consistencies, 253 I Vehicle for canying pigment in printin^-il 252 \

Verify divisions ci words, 50 Victoria Press, z68 Viscosity, 253 V-shaped sUt in draw-sheet, 233

W I

Wad of paper for plugging quoins, 170 Warped wooden furniture, 172, 173 Washing rollers, kerosene best material foi;

246 Washintr up. 246 Wa-lunirtnti hand-pr«5» 27 Wuiti ufi wooden fumitttre^ 17; 1

Waiermiifk. 370 Woj'tni!nii,iiijf effect, 109 methoni of obtaiiUQ^ & mlrd job^ X46 rult* job, 143 Weariniat nC mllcr-pinfiT 16S WciKhtii of paper, J74 Well-balariced paKC. 135 WetJ-pruiMSrtJoned pageSn 91^ Wet tins type

prior to dijitnbulioa, 33 Willi I size type shiill I use P 37 Which Avuy type is to be set, deiignatillg.

116 White paper, black ink on, 90 White space, 90

around cuts, allowance of, 156

use of. 90 Width to length, relation of, 94, 95 Wiping around presses 249 Wire side of paper, 2^6 Wiring through the side, 176 Wooden furniture, 172, 184

four-em, not square, 172, 184

warped. 172, 173

water on, 172 Wooden quoins, 164 Wood-pulp, chemical, 264

mechanical. 263 Words, division of, 63-65

of one syllable cannot be divided, 64 Work-and-turn form, 176, i8i Working by the piece, 38 Workmen of mediocre ability, 84 Writings, 273 Wrong font, 8z

Composition by Braunworth & Co., New York Electrotyping by George J. Johnston, New York Printing by Burr Printing House, New York Binding by The Methodist Book Concern, New York

Digitized by VjOOQIC

ipriBti«4

73 ..

J p0t

Digitized by VjOOQiC

Digitized by VjOOQiC

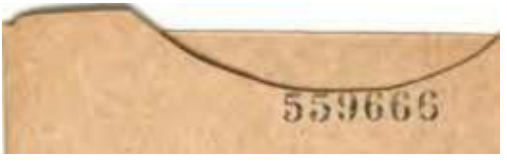

STTTHTGO

mi

UNIVERSITY OF CAUFORNIA UBRARY

Jl



Digitized byVjOOQlC

:ii:ii;;!i;:;iliii!ii!iiia